

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)

[TWC-78-2](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

TSI SPECIFICATION SHEET
CABLE, RADIO FREQUENCY, TWIN CONDUCTOR, BALANCED LINE
TWC-78-2

MARK: TROMPETER ELECTRONICS TWINAX, TWC-78-2 E***** AWM STYLE 2092 (*)

*(VENDOR 4 DIGIT NUMBER TO BE ASSIGNED BY TEI PURCHASING DEPT.)

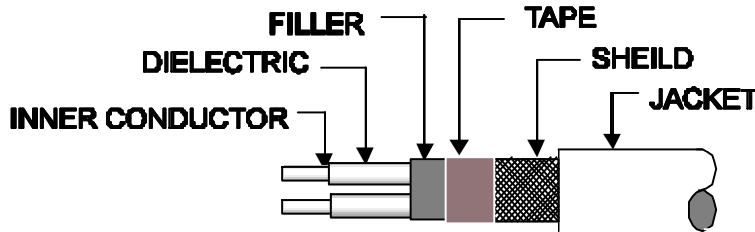

E*****: MANUFACTURER'S UL FILE NUMBER.

REQUIREMENTS:

1. IMPEDENCE (OF PAIR) ----- 78 ± 3 OHMS
2. OPERATING VOLTAGE ----- 1 KVRMS MAX/2 KVDC
3. BEND RADIUS ----- 1.25 INCH MIN
4. CAPACITANCE -----

COND TO COND -----	21.2 PF/FT
COND TO SHIELD -----	36.0 PF/FT
COND TO SHIELD TO COND ----	38.0 PF/FT
TWO COND TO SHIELD -----	62.0 PF/FT
5. CONDUCTOR LOOP RESISTANCE ----- 20.0 OHMS/M FT MAX
6. VELOCITY OF PROPAGATION ----- 66% NOM
7. ATTENUATION: FREQUENCY dB/100 FT NOM FREQUENCY dB/100 FT NOM

1 MHz	0.70	40 MHz	4.50
3 MHz	1.10	50 MHz	5.10
4 MHz	1.40	100 MHz	7.50
5 MHz	1.55	200 MHz	10.50
7 MHz	1.80	500 MHz	16.00
10 MHz	2.20	700 MHz	18.60
20 MHz	3.10	1000 MHz	22.50
30 MHz	3.90		
8. HEAT AGING ATTENUATION TEST: SUBJECT A 180 FOOT SAMPLE TO 80°C IN AIR CIRCULATING OVEN FOR 72 HRS. REMOVE CABLE FROM THE OVEN AND LET STABILIZE TO ROOM TEMP (4 HRS MIN). THE ATTENUATION AT 7 MHZ SHALL NOT INCREASE MORE THAN .48 dB/100 FT FROM ITS UNAGED VALUE
9. WEIGHT ----- .0353 LB/ FT
10. INSULATION RESISTANCE (MIN) ----- 20 MEGOHMS/1000 FT
11. OPERATING TEMPERATURE RANGE ----- -40° C TO +80° C

DESCRIPTION	CONSTRUCTIONAL DETAILS
INNER CONDUCTORS	TWO CONDUCTORS, EACH 7 STRANDS OF AWG SIZE 28 TINNED COPPER WIRE. NOM DIA .037 (AWG 20)
DIELECTRICS	TWO EACH POLYETHYLENE, ONE BLUE, ONE NATURAL. NOM DIA .076
FILLERS	TWO EACH POLYETHYLENE. NOM DIA .052
CABLE CORE	.154 NOM O.D., .160 MAX DIELECTRICS AND FILLERS TO HAVE A 2.92 ± .25 RIGHT-HAND OR LEFT-HAND LAY, 4 TWISTS PER FOOT. A NYLON THREAD WRAP SHALL BE APPLIED WITH SUFFICIENT COVERAGE TO MAINTAIN THE POSITION OF THE COMPONENTS
SHIELD	SINGLE BRAID, (128 STRANDS 16X8) AWG SIZE 36 TINNED COPPER WIRE. 9.8 PICKS/IN, 32° BRAID ANGLE, 4.2 OHM/M FT D.C. RESISTANCE. SHIELD COVERAGE 93% NOM, MAX O.D. .195
JACKET	BLUE (PER EIA -359-A, MUNSSELL COLOR CHART, SYMBOL CENTROID) POLYVINYLCHLORIDE .242 ± .005 O.D.

TSI	DWN	DKC	10-6-98	MATERIAL -----	CODE IDENT 14949	DRAWING NO. TWC-78-2	REV J
	CHK	D. CORNMAN	11-24-04				
	ENG	R. THIELE	11-24-04				
	APPR	T. CLARE	11-24-04				
				SCALE -----	DATE 9-27-76	SHEET	