

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)  
[1792840000](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.81 mm (0.150 inch) | Socket connectors, screw clamp connection, pitch 3.81 | BCZ 3.81/180 | BCZ 3.81/180

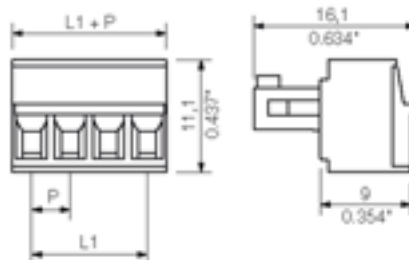

#### General ordering data

Order No.	1792840000
Part designation	BCZ 3.81/12/180 SN BK BX
Version	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 12, 180°, Box
EAN	4032248226924
Qty.	50 pc(s).

#### System parameters

Conductor connection system	Clamping yoke connection
Outgoing direction of conductor	180°
Pitch	3.81 mm
Pitch in inch	0.15 inch
No. of poles	12
No. of rows	1
Screwdriver blade	0.4 x 2.5
Screwdriver blade standard	DIN 5264
Tightening torque, min.	0.2
Tightening torque, max.	0.25 Nm
Clamping screw	M 2
Stripping length	7 mm
L1 in mm	41.91 mm

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.81 mm (0.150 inch) | Socket connectors, screw clamp connection, pitch 3.81 | BCZ 3.81/180 | BCZ 3.81/180

#### System parameters

L1 in inch	1.65 inch
Electric shock protection to DIN VDE 0470	IP 20
Electric shock protection to DIN VDE 0470	Safe from finger touch

#### Material data

Insulating material	PA GF
Colour	black
colour chart	Similar to RAL 9011
Insulating material group	II
Flammability class UL 94	V-0
CTI	>= 475
Contact base material	Copper alloy
Contact surface	tinned

#### Connectable conductors

Clamping range, min.	0.08 mm <sup>2</sup>
Clamping range, max.	1.5 mm <sup>2</sup>
AWG, min.	28
AWG, max.	16
Solid, min. H05(07) V-U	0.2 mm <sup>2</sup>
Solid, max. H05(07) V-U	1.5 mm <sup>2</sup>
Flexible, min. H05(07) V-K	0.2 mm <sup>2</sup>
Flexible, max. H05(07) V-K	1.5 mm <sup>2</sup>
With wire end ferrule, acc. to DIN 46 228/1, min.	0.2 mm <sup>2</sup>
With wire end ferrule, acc. to DIN 46 228/1, max.	1.5 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.2 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, max.	1.5 mm <sup>2</sup>
Gauge to EN 60999 a x b; ø	2.4 mm x 1.5 mm ; 2.4 mm

#### DIN IEC rating data

Rated current, min. No. pins (Tu=20°C)	17.5 A
Rated current, max. No. pins (Tu=20°C)	17.5 A
Rated current, min. No. pins (Tu=40°C)	17.5 A
Rated current, max. No. pins (Tu=40°C)	15.2 A
Rated voltage for overvoltage class/pollution severity II/2	320 V
Rated voltage for overvoltage class/pollution severity III/2	160 V
Rated voltage for overvoltage class/pollution severity III/3	160 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	2.5 kV
Short-time withstand current resistance	3 x 1s with 76 A

#### CSA rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.81 mm (0.150 inch) | Socket connectors, screw clamp connection, pitch 3.81 | BCZ 3.81/180 | BCZ 3.81/180

#### CSA rating data

AWG conductor (field wiring), min.	28
AWG conductor (field wiring), max.	16

#### UL 1059 rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor, min.	28
AWG conductor, max.	16

#### Approvals

Approvals institutes



#### Classifications

eClass 4.1	27-26-07-01
eClass 5.0	27-26-07-01
eClass 5.1	27-26-07-04

#### Similar products

Order No.	Part designation	Version
1940730000	BCZ 3.81/02/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 2, 180°, Box
1792770000	BCZ 3.81/02/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 2, 180°, Box
1792860000	BCZ 3.81/02/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 2, 180°, Box
1940740000	BCZ 3.81/03/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 3, 180°, Box
1792780000	BCZ 3.81/03/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 3, 180°, Box
1792870000	BCZ 3.81/03/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 3, 180°, Box
1940750000	BCZ 3.81/04/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 4, 180°, Box
1792790000	BCZ 3.81/04/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 4, 180°, Box

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.81 mm (0.150 inch) | Socket connectors, screw clamp connection, pitch 3.81 | BCZ 3.81/180 | BCZ 3.81/180

1792880000	BCZ 3.81/04/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 4, 180°, Box
1940760000	BCZ 3.81/05/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 5, 180°, Box
1792800000	BCZ 3.81/05/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 5, 180°, Box
1792890000	BCZ 3.81/05/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 5, 180°, Box
1940770000	BCZ 3.81/06/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 6, 180°, Box
1792810000	BCZ 3.81/06/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 6, 180°, Box
1792900000	BCZ 3.81/06/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 6, 180°, Box
1940780000	BCZ 3.81/07/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 7, 180°, Box
1871410000	BCZ 3.81/07/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 7, 180°, Box
1871400000	BCZ 3.81/07/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 7, 180°, Box
1940790000	BCZ 3.81/08/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 8, 180°, Box
1792820000	BCZ 3.81/08/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 8, 180°, Box
1792910000	BCZ 3.81/08/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 8, 180°, Box
1940800000	BCZ 3.81/09/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 9, 180°, Box
1871390000	BCZ 3.81/09/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 9, 180°, Box
1871380000	BCZ 3.81/09/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 9, 180°, Box
1940810000	BCZ 3.81/10/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 10, 180°, Box

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.81 mm (0.150 inch) | Socket connectors, screw clamp connection, pitch 3.81 | BCZ 3.81/180 | BCZ 3.81/180

1792830000	BCZ 3.81/10/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 10, 180°, Box
1792920000	BCZ 3.81/10/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 10, 180°, Box
1940820000	BCZ 3.81/11/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 11, 180°, Box
1899400000	BCZ 3.81/11/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 11, 180°, Box
1899390000	BCZ 3.81/11/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 11, 180°, Box
1940830000	BCZ 3.81/12/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 12, 180°, Box
1792930000	BCZ 3.81/12/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 12, 180°, Box
1940840000	BCZ 3.81/13/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 13, 180°, Box
1899440000	BCZ 3.81/13/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 13, 180°, Box
1899430000	BCZ 3.81/13/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 13, 180°, Box
1940850000	BCZ 3.81/14/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 14, 180°, Box
1899480000	BCZ 3.81/14/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 14, 180°, Box
1899470000	BCZ 3.81/14/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 14, 180°, Box
1940860000	BCZ 3.81/15/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 15, 180°, Box
1899520000	BCZ 3.81/15/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 15, 180°, Box
1899510000	BCZ 3.81/15/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 15, 180°, Box
1940870000	BCZ 3.81/16/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 16, 180°, Box

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.81 mm (0.150 inch) | Socket connectors, screw clamp connection, pitch 3.81 | BCZ 3.81/180 | BCZ 3.81/180

1792850000	BCZ 3.81/16/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 16, 180°, Box
1792940000	BCZ 3.81/16/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 16, 180°, Box
1940890000	BCZ 3.81/17/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 17, 180°, Box
1940970000	BCZ 3.81/17/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 17, 180°, Box
1940930000	BCZ 3.81/17/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 17, 180°, Box
1940980000	BCZ 3.81/18/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 18, 180°, Box
1940900000	BCZ 3.81/18/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 18, 180°, Box
1940940000	BCZ 3.81/18/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 18, 180°, Box
1940910000	BCZ 3.81/19/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 19, 180°, Box
1940990000	BCZ 3.81/19/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 19, 180°, Box
1940950000	BCZ 3.81/19/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 19, 180°, Box
1940920000	BCZ 3.81/20/180 SN OR BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 20, 180°, Box
1941000000	BCZ 3.81/20/180 SN BK BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 20, 180°, Box
1940960000	BCZ 3.81/20/180 SN GN BX	PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.81 mm, No. of poles: 20, 180°, Box