

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)
[1794300000](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) 2-row | Plug connectors, THR solder connection | S2L-SMT 3.5/90 | S2L-SMT 3.5/90G Box

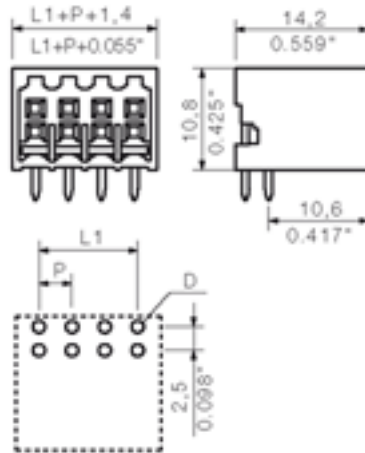

General ordering data

| | |
|------------------|--|
| Order No. | 1794300000 |
| Part designation | S2L-SMT3.5/24/90G SN |
| Version | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 24, 90°, Box |
| EAN | 4032248231461 |
| Qty. | 20 pc(s). |

System parameters

| | |
|---|--------------------------|
| Fitted to PCB | Reflow solder connection |
| Outgoing elbow | 90° |
| Pitch | 3.5 mm |
| Pitch in inch | 0.138 inch |
| No. of poles | 24 |
| Solder pin length | 3.2 mm |
| Can be coded | Yes |
| No. of rows | 2 |
| No. of solder pins per pole | 1 |
| Dia. of fitting hole | 1.3 mm |
| Fitting hole tolerance | + 0.1 mm |
| L1 in mm | 38.5 mm |
| L1 in inch | 1.516 inch |
| Electric shock protection to DIN VDE 0470 | IP 10 |

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) 2-row | Plug connectors, THR solder connection | S2L-SMT 3.5/90 | S2L-SMT 3.5/90G Box

System parameters

Electric shock protection to DIN VDE 0470 Safe from back-of-hand touch

Material data

| | |
|---------------------------------------|---------------------|
| Insulating material | LCP GF |
| Colour | black |
| colour chart | Similar to RAL 9011 |
| Insulating material group | IIIb |
| Flammability class UL 94 | V-0 |
| CTI | >= 175 |
| Contact base material | Copper alloy |
| Contact surface | tinned |
| Constant operating temp., min. | -25 °C |
| Constant operating temp., max. | 100 |
| Storage temperature, min. | -25 °C |
| Storage temperature, max. | 55 °C |
| Max. relative humidity during storage | 93 % |

DIN IEC rating data

| | |
|--|------------------|
| Rated current, min. No. pins (Tu=20°C) | 10 A |
| Rated current, max. No. pins (Tu=20°C) | 10 A |
| Rated current, min. No. pins (Tu=40°C) | 9 A |
| Rated current, max. No. pins (Tu=40°C) | 8.5 A |
| Rated voltage for overvoltage class/pollution severity III/3 | 50 V |
| Rated impulse withstand voltage for overvoltage class/pollution severity III/3 | 2.5 kV |
| Rated voltage for overvoltage class/pollution severity III/2 | 125 V |
| Rated impulse withstand voltage for overvoltage class/pollution severity III/2 | 1.5 kV |
| Rated voltage for overvoltage class/pollution severity II/2 | 160 V |
| Rated impulse withstand voltage for overvoltage class/pollution severity II/2 | 1.5 kV |
| Short-time withstand current resistance | 3 x 1s with 77 A |

CSA rating data

| | |
|-----------------------------|------|
| Rated voltage (Use group D) | 50 V |
| Rated current (Use group D) | 5 A |

UL 1059 rating data

| | |
|-----------------------------|-------|
| Rated voltage (Use group D) | 150 V |
| Rated current (Use group D) | 10 A |

Approvals

Approvals institutes



Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) 2-row | Plug connectors, THR solder connection | S2L-SMT 3.5/90 | S2L-SMT 3.5/90G Box

Classifications

| | |
|------------|-------------|
| ETIM 2.0 | NK |
| ETIM 3.0 | EC001284 |
| eClass 4.1 | 27-26-07-01 |
| eClass 5.0 | 27-26-07-01 |
| eClass 5.1 | 27-26-07-01 |

Similar products

| Order No. | Part designation | Version |
|------------|----------------------|--|
| 1920850000 | S2L-SMT3.5/4/90G SN | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 4, 90°, Box |
| 1794210000 | S2L-SMT3.5/6/90G SN | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 6, 90°, Box |
| 1794220000 | S2L-SMT3.5/8/90G SN | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 8, 90°, Box |
| 1794230000 | S2L-SMT3.5/10/90G SN | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 10, 90°, Box |
| 1794240000 | S2L-SMT3.5/12/90G SN | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 12, 90°, Box |
| 1794250000 | S2L-SMT3.5/14/90G SN | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 14, 90°, Box |
| 1794260000 | S2L-SMT3.5/16/90G SN | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 16, 90°, Box |
| 1794270000 | S2L-SMT3.5/18/90G SN | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 18, 90°, Box |
| 1794280000 | S2L-SMT3.5/20/90G SN | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 20, 90°, Box |
| 1794290000 | S2L-SMT3.5/22/90G SN | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 22, 90°, Box |
| 1794310000 | S2L-SMT3.5/26/90G SN | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 26, 90°, Box |
| 1794320000 | S2L-SMT3.5/28/90G SN | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 28, 90°, Box |
| 1794330000 | S2L-SMT3.5/30/90G SN | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 30, 90°, Box |
| 1794340000 | S2L-SMT3.5/32/90G SN | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 32, 90°, Box |
| 1794350000 | S2L-SMT3.5/34/90G SN | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 34, 90°, Box |
| 1794360000 | S2L-SMT3.5/36/90G SN | PCB plug-in connector, Male connectors, Reflow solder connection, Pitch: 3.50 mm, No. of poles: 36, 90°, Box |