

## Excellent Integrated System Limited

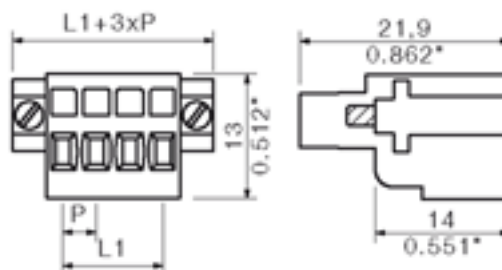
Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)  
[1690890000](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)


**General ordering data**

Order No.	1690890000
Part designation	BLZF 3.5/3/F SN OR
Version	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 3, 180°, Box
EAN	4008190329402
Qty.	100 pc(s).

**System parameters**

Conductor connection system	Tension clamp connection
Outgoing direction of conductor	180°
Pitch	3.5 mm
Pitch in inch	0.138 inch
No. of poles	3
No. of rows	1
Screwdriver blade	0.4 x 2.5
Screwdriver blade standard	DIN 5264-A
Stripping length	10 mm
L1 in mm	7 mm
L1 in inch	0.276 inch
Electric shock protection to DIN VDE 0470	IP 20
Electric shock protection to DIN VDE 0470	Safe from finger touch

**System parameters**
**Material data**

Insulating material	PBT
Colour	orange
colour chart	Similar to RAL 2000
Insulating material group	IIIa
Flammability class UL 94	V-0
CTI	>= 200
Contact base material	Copper alloy
Contact surface	tinned

**Connectable conductors**

Clamping range, min.	0.13 mm <sup>2</sup>
Clamping range, max.	1.5 mm <sup>2</sup>
AWG, min.	28
AWG, max.	16
Outer diameter of insulation, max.	2.9 mm
Solid, min. H05(07) V-U	0.2 mm <sup>2</sup>
Solid, max. H05(07) V-U	1.5 mm <sup>2</sup>
Flexible, min. H05(07) V-K	0.2 mm <sup>2</sup>
Flexible, max. H05(07) V-K	1.5 mm <sup>2</sup>
With wire end ferrule, acc. to DIN 46 228/1, min.	0.2 mm <sup>2</sup>
With wire end ferrule, acc. to DIN 46 228/1, max.	1.5 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.2 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, max.	1 mm <sup>2</sup>
Gauge to EN 60999 a x b; ø	2.4 mm x 1.5 mm;

**DIN IEC rating data**

Rated current, min. No. pins (Tu=20°C)	14.5 A
Rated current, max. No. pins (Tu=20°C)	10 A
Rated current, min. No. pins (Tu=40°C)	12 A
Rated current, max. No. pins (Tu=40°C)	8 A
Rated voltage for overvoltage class/pollution severity II/2	320 V
Rated voltage for overvoltage class/pollution severity III/2	160 V
Rated voltage for overvoltage class/pollution severity III/3	160 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	2.5 kV
Short-time withstand current resistance	3 x 1s with 100 A

**CSA rating data**

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor (field wiring), min.	26
AWG conductor (field wiring), max.	14

**CSA rating data**
**UL 1059 rating data**

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor, min.	26
AWG conductor, max.	14

**Approvals**

Approvals institutes


**Classifications**

ETIM 2.0	NK
ETIM 3.0	EC001284
eClass 4.1	27-26-07-01
eClass 5.0	27-26-07-01
eClass 5.1	27-26-07-04

**Similar products**

Order No.	Part designation	Version
1690880000	BLZF 3.5/2/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 2, 180°, Box
1691110000	BLZF 3.5/2/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 2, 180°, Box
1691120000	BLZF 3.5/3/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 3, 180°, Box
1690900000	BLZF 3.5/4/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 4, 180°, Box
1691130000	BLZF 3.5/4/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 4, 180°, Box
1690910000	BLZF 3.5/5/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 5, 180°, Box
1691140000	BLZF 3.5/5/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 5, 180°, Box
1690920000	BLZF 3.5/6/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 6, 180°, Box

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) | Socket connectors, tension clamp connection, pitch 3.5 | BLZF 3.5 | BLZF 3.5/180F

1691150000	BLZF 3.5/6/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 6, 180°, Box
1690930000	BLZF 3.5/7/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 7, 180°, Box
1691160000	BLZF 3.5/7/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 7, 180°, Box
1690940000	BLZF 3.5/8/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 8, 180°, Box
1691170000	BLZF 3.5/8/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 8, 180°, Box
1690950000	BLZF 3.5/9/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 9, 180°, Box
1691180000	BLZF 3.5/9/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 9, 180°, Box
1690960000	BLZF 3.5/10/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 10, 180°, Box
1691190000	BLZF 3.5/10/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 10, 180°, Box
1690970000	BLZF 3.5/11/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 11, 180°, Box
1691200000	BLZF 3.5/11/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 11, 180°, Box
1690980000	BLZF 3.5/12/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 12, 180°, Box
1691210000	BLZF 3.5/12/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 12, 180°, Box
1690990000	BLZF 3.5/13/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 13, 180°, Box
1691220000	BLZF 3.5/13/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 13, 180°, Box
1691000000	BLZF 3.5/14/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 14, 180°, Box
1691230000	BLZF 3.5/14/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 14, 180°, Box

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) | Socket connectors, tension clamp connection, pitch 3.5 | BLZF 3.5 | BLZF 3.5/180F

1691010000	BLZF 3.5/15/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 15, 180°, Box
1691240000	BLZF 3.5/15/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 15, 180°, Box
1691020000	BLZF 3.5/16/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 16, 180°, Box
1691250000	BLZF 3.5/16/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 16, 180°, Box
1691030000	BLZF 3.5/17/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 17, 180°, Box
1691260000	BLZF 3.5/17/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 17, 180°, Box
1691040000	BLZF 3.5/18/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 18, 180°, Box
1691270000	BLZF 3.5/18/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 18, 180°, Box
1691050000	BLZF 3.5/19/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 19, 180°, Box
1691280000	BLZF 3.5/19/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 19, 180°, Box
1691060000	BLZF 3.5/20/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 20, 180°, Box
1691290000	BLZF 3.5/20/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 20, 180°, Box
1691070000	BLZF 3.5/21/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 21, 180°, Box
1691300000	BLZF 3.5/21/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 21, 180°, Box
1691080000	BLZF 3.5/22/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 22, 180°, Box
1691310000	BLZF 3.5/22/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 22, 180°, Box
1691090000	BLZF 3.5/23/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 23, 180°, Box

1691320000	BLZF 3.5/23/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 23, 180°, Box
1691100000	BLZF 3.5/24/F SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 24, 180°, Box
1691330000	BLZF 3.5/24/F SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 24, 180°, Box