

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[EM02015200J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
EMxx01x200J0G	7.62 mm

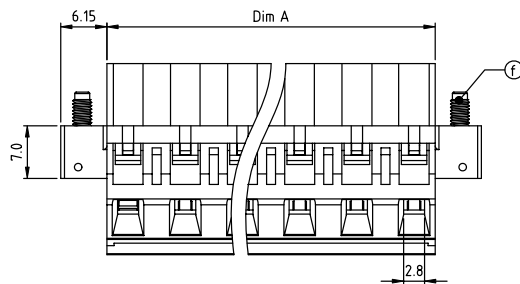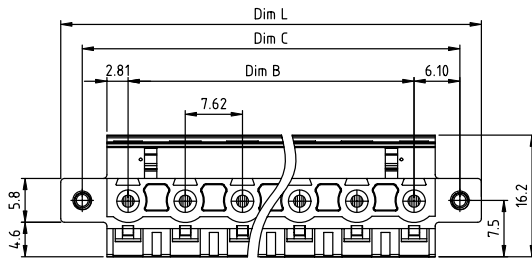

Material:

- Item (a) Clamp: Brass(CuZn) Ni plated
- Item (b) Terminal screw: Steel Zinc plating "-" slot type
- Item (c) Female contact: High conductivity copper, Tin plated
- Item (d) Terminal (top body): Thermoplastic (UL94V-0)
- Item (e) Terminal (bottom body): Thermoplastic (UL94V-0)
- Item (f) Flange screw: Steel Zinc plating "+/-" combination type

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 20A
- Wire range:
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque: 4 Lb-In
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 16KV
- Operating temperature: -40°C to +115°C
- Safety Approval:

Dim L=(N-1)×7.62+17.92
Dim A=(N-1)×7.62+5.62
Dim B=(N-1)×7.62
Dim C=(N-1)×7.62+12.20
N=Number of poles

POLES	Tolerance
2p-6p	±0.20
7p-12p	±0.30
13p-16p	±0.40

PART NO.: EM xx 01 x 2 00J0 G

Solid block	No. of poles	Color	RoHS compliant (lead<4%) In copper Alloy
0	2	Black (RAL9005)	
02	2	Red (RAL3001/D)	
03	3	Orange(RAL2011/P)	
...	...	4 Yellow(RAL1018/A)	
...	...	5 Green(RAL6018/T)	
...	...	6 Blue (RAL5015/A)	
...	...	8 Grey(RAL7035/D)	
...	...	9 White(RAL1102)	
C	...	Green(RAL6018/U)	

mat'l. code	surface	tolerance	projection	product family
	ASME Y14.5	ASME Y14.5		TERMINAL BLOCK
ltr ecn no dr date	tolerances unless otherwise specified			title
	angles	X.±0.5	MM	TERMINAL BLOCK
	linear	X.X±0.3		PLUGGABLE PLUG, WITH FLANGE
	X'±1"	X.XX±0.1	scale	dwg no
dr	EVIN ZHONG	042114		sheet 1 of 1
enrg	EVIN ZHONG	042114		size
chr	HANKE FENG	042114		A4
appd	SHI JUN	042114		type
sheet index	revision sheet	A 1		CUSTOMER Drawing

form: A4mmXLc

1

2

PDS: Rev :A 3

STATUS:Released

Printed: Jul 01, 2014