

Excellent Integrated System Limited

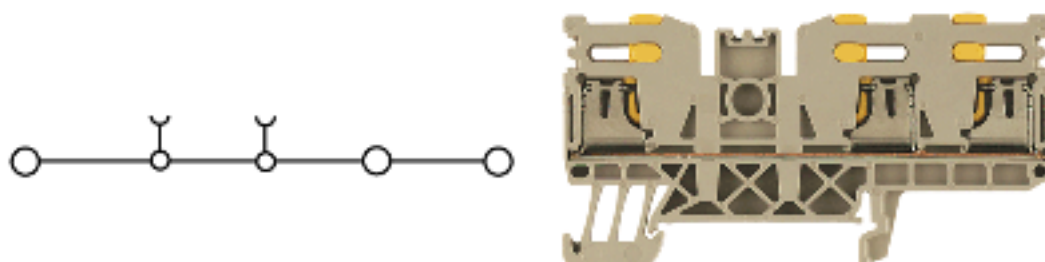
Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)
[1792570000](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


General ordering data

Order No.	1792570000
Part designation	IDU 1.5N/3AN
Version	Feed-through terminal, 1.5 mm ² , Insulation displacement connection, Wemid, dark beige, TS 35
EAN	4032248281558
Qty.	100 pc(s).

Product notes

Note, technical data	Conductor < 0.5 mm ² / AWG 24 with IRH 1.5
----------------------	---

PT OKIECEEx/ATEX rating data

EU-type examination certificate	KEMA02ATEX2241U
Download, German	KEMA02ATEX2241U_d.pdf
Download English	KEMA02ATEX2241U_e.pdf
ATEX voltage	275 V
ATEX current	15 A
ATEX conductor cross-section	1.5 mm ²
Voltage when using cross-connections	CrossConnectionGuide.pdf
Operating temperature range	Einsatztemperaturbereich siehe EG-Baumusterprüfbescheinigung/IECEX-Certificate of Conformity
Marking EN 60079-7	Ex e II
Marking ATEX Directive 94/9/EC	Ex II 2 G D

Additional technical data

Colour of insulating material	dark beige
Connection direction	top
End plate required	Yes
Explosion-tested version "Ex e"	Yes
Installation advice	TS 35
Insulating material	Wemid
Levels cross-connected internally	No
No. of identical terminals	1

Additional technical data

No. of levels	1
No. of terminal strips per level	3
Open sides	right
Operating temperature range	- 50 °C, + 120 °C
Product family	I-Series
Type of connection	Insulation displacement connection
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0
Version	Feed-through terminal

CSA rating data

Voltage (CSA)	300 V
CSA current	10 A
Min. cross-section (CSA)	AWG 24
Max. cross-section (CSA)	AWG 16

Conductors for clamping (rated connection)

Clamping range, min.	0.21 mm ²
Clamping range, max.	1.5 mm ²
Type of connection	Insulation displacement connection
Connection direction	top
No. of connections	3
Blade size	0.6 x 3.5 mm
Solid, min.	0.21 mm ²
Solid, max.	1.5 mm ²
Flexible, min.	0.21 mm ²
Flexible, max.	1.5 mm ²
Flexible, min.	0.25 mm ²
Flexible, max.	0.34 mm ²
AWG conductor size, min.	AWG 24
AWG conductor size, max.	AWG 16
AWG conductor size, min.	0.21 mm ²
AWG conductor size, max.	1.31 mm ²

Dimensions

Width	5.1 mm
Height of lowest version	40.5 mm
Length	78.5 mm
TS 35 offset	33.5 mm

Mounting rail

Installation advice	TS 35
Length	78.5 mm
Standards	IEC 60947-7-1 / IEC 60352-4

Rating data

Rated cross-section	1.5 mm ²
Rated voltage	500 V
Rated impulse voltage	6 kV
Rated current	17.5 A
Standards	IEC 60947-7-1 / IEC 60352-4

Rating data

Pollution severity 3

UL rating data

Voltage (UL) 300 V
 Current (UL) 10 A
 Min. cross-section (UL) AWG 24
 Max. cross-section (UL) AWG 16

Approvals

Approvals institutes



Downloads

STEP 1792570000_32826_IDU_1.5N-3AN_STP.stp

Classifications

ETIM 2.0 EC000897
 ETIM 3.0 EC000897
 eClass 4.1 27-14-11-20
 eClass 5.0 27-14-11-20
 eClass 5.1 27-14-11-20

Similar products

Order No.	Part designation	Version
1792540000	IDU 1.5N	Feed-through terminal, 1.5 mm ² , Insulation displacement connection, Wemid, dark beige, TS 35
1792550000	IDU 1.5N BL	Feed-through terminal, 1.5 mm ² , Insulation displacement connection, Wemid, blue, TS 35
1824340000	IDU 1.5N/2X2AN	Feed-through terminal, 1.5 mm ² , Insulation displacement connection, Wemid, dark beige, TS 35
1792580000	IDU 1.5N/3AN BL	Feed-through terminal, 1.5 mm ² , Insulation displacement connection, Wemid, blue, TS 35
1792600000	IDU 1.5N/4AN	Feed-through terminal, 1.5 mm ² , Insulation displacement connection, Wemid, dark beige, TS 35
1792610000	IDU 1.5N/4AN BL	Feed-through terminal, 1.5 mm ² , Insulation displacement connection, Wemid, blue, TS 35