

Excellent Integrated System Limited

Stocking Distributor






Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[K3061250A0J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
K3xx12x0A0J0G	3.50 mm

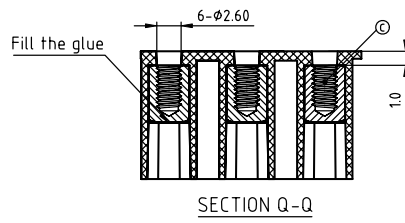

- Material:**
- Item ① Terminal(housing): Thermoplastic (UL94V-0)
 - Item ② Pin: copper Tin plated
 - Item ③ Flange screw NUT: Brass M 2.5
- Electrical:** cULus
- Voltage rating: 160V
 - Current rating: 5.5A
 - Withstanding Voltage: 1.32 KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 260°C ±5°C/5 Sec
 - Safety Approval:

DIMENSION	
Dim L	(N/3-1) × 3.5+14.4
Dim A	(N/3-1) × 3.5
Dim B	(N/3-1) × 3.5
Dim C	(N/3-1) × 3.5+8.6
POLES	
3x2P-3x6P	±0.15
3x7P-3x12P	±0.20
3x13P-3x18P	±0.25
3x19P-3x24P	±0.30

PART NO.: K3 xx 1 2 x 0 A0J0 G

Solid block		Color	RoHS compliant
No. of poles	2	Black (RAL9005)	(lead<4%)
06 3x2poles	3	Red (RAL3001/D)	In copper Alloy
09 3x3poles	4	Orange(RAL2011/P)	
...	5	Yellow(RAL1018/A)	
72 3x24poles	6	Green(RAL6018/T)	
	8	Blue (RAL5015/A)	
	9	Grey(RAL7035/D)	
	9	White(RAL1102)	
	C	Green(RAL6018/U)	

mat'l. code				surface	tolerance	projection	product family	
ltr ecn no dr date				ASME Y14.5	ASME Y14.5	ASME Y14.5	TERMINAL BLOCK	
				tolerances unless otherwise specified			title	
				angled	X.±0.5	MM	TERMINAL BLOCK	
				line	X.X±0.3		PLUGGABLE SOCKET, WITH FLANGE, VERTICAL	
				X'±1"	X.XX±0.1	scale	dwg no	
				dr	EVIN ZHONG 042514		sheet 1 of 1	
				enrg	EVIN ZHONG 042514		size	
				chr	HANKE FENG 042514		A4	
				appd	SHI JUN 042514		type	
				sheet	revision	A	CUSTOMER Drawing	
index				sheet	1			