

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[KT02015400J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
KTxx01x400J0G	7.62 mm


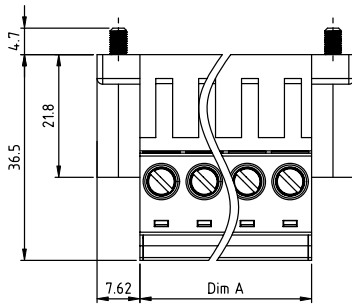


Material:

- Item②Terminal(housing) : Thermoplastic (UL94V-0)
- Item⑤Terminal(cover) : Thermoplastic (UL94V-0)
- Item③Terminal screw : Steel Zinc plating " - " slot type
- Item④Clamp : Brass, Ni plated
- Item⑥Female contact : Copper, Tin plated
- Item⑦With flange screw : Steel Zinc plating M3

Electrical cULus

- Voltage rating: 600VAC
- Current rating: 41A
- Solid wire (AWG): 8-24
- Stranded wire(AWG): 8-24
- Torque: 9.0 Lb-In
- Screw: M3.5
- Wire strip length: 10-11mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval:

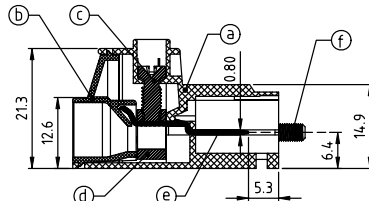

SECTION P-P

N=Number of poles

Dim A	N×7.62
Dim B	(N-1)×7.62
Dim C	(N+1)×7.62
Dim D	(N+2)×7.62

Dimension

Poles	Tolerance
2P-5P	±0.20
6P-10P	±0.30
11P-16P	±0.40

PART NO.: KT xx 01 x 4 00J0 G

Solid block	Color	RoHS compliant
No. of poles	0 Black (RAL9005)	(lead<4%)
02 2 poles	2 Red (RAL3001/D)	In copper Alloy
03 3 poles	3 Orange(RAL2011/P)	
...	4 Yellow(RAL1018/A)	
...	5 Green(RAL6018/T)	
16 16 poles	6 Blue (RAL5015/A)	
	8 Grey(RAL7035/D)	
	9 White(RAL1102)	
	C Green(RAL6018/U)	

mat'l. code	surface	tolerance	projection	product family
ASME Y14.5	ASME Y14.5	ASME Y14.5	MM	TERMINAL BLOCK
tr	ec	no	dr	date
tolerances unless otherwise specified				
angled		X.±0.5		
mm		X.X±0.3		
X'±1"		X.XX±0.1		
dr	EVIN ZHONG	050614		
enr	EVIN ZHONG	050614		
chr	HANKE FENG	050614		
appd	SHI JUN	050614		
sheet	revision	A		
index	sheet	1		

form: A4mmXLc

1

2

PDS: Rev :A 3

STATUS:Released

Printed: Jul 01, 2014