

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[OP022B0100J0G](#)



For any questions, you can email us directly:
sales@integrated-circuit.com

1 | 2


3

4

PRODUCT NUMBER	PITCH
OPxx2Bx100J0G	3.50 mm

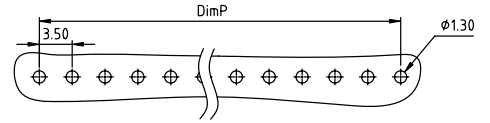

RECOMMENDED P.C.B LAYOUT
TOP VIEW

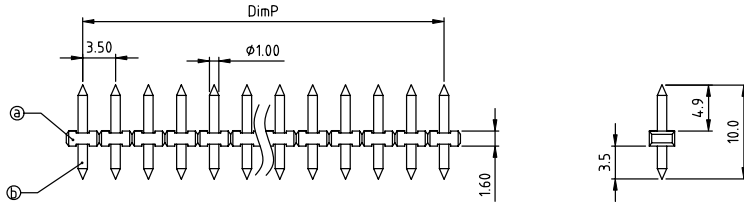

- Material:
- IfemⓂ Terminal(housing): High temp. polyamide (UL94V-0)
 - IfemⓂ Pin: Brass, Tin or Au plated.
- Electrical: cULus
- Voltage rating: 150V
 - Current rating: 10A
 - Withstanding Voltage: 1.3KV
 - Operating temperature: -40°C to +120°C
 - Reflow Soldering temperature: 260°C/10 Sec Max
 - Safety Approval:

DIMENSION

Dim P	(N-1)×3.50
Dim L	N×3.50

N=Number of poles

Poles	Tolerance
2p-5p	±0.10
6p-9p	±0.15
10p-13p	±0.20
14p-17p	±0.25
18p-24p	±0.30

PART NO.: OP xx 2B x 1 00J0 G

- Solid block
 - No. of poles
 - 02 2 poles
 - 03 3 poles
 -
 - 24 24 poles
- 0 Tin plating 120u" Min
 - 1 Gold plating 10u" (lead<4%)
 - 2 Gold flash
- RoHS compliant
(In copper Alloy)

mat'l. code	surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family TERMINAL BLOCK
ltr	ecn	no	dr	date
tolerances unless otherwise specified				title TERMINAL BLOCK
angles	X.±0.5	X.X±0.3	X'±1'	X.XX±0.1
scale				PLUGGABLE SOCKET,VERTICAL,THR
dr	EVIN ZHONG	041714	dwg no	
enfr	EVIN ZHONG	041714	sheet 1 of 1	
chr	HANKE FENG	041714	size A4	
appd	SHI JUN	041714	type CUSTOMER Drawing	
sheet index	revision sheet	A	1	

form: A4mmXLc

1

2

PDS: Rev :A 3

STATUS:Released

Printed: Jul 01, 2014