

Excellent Integrated System Limited

Stocking Distributor

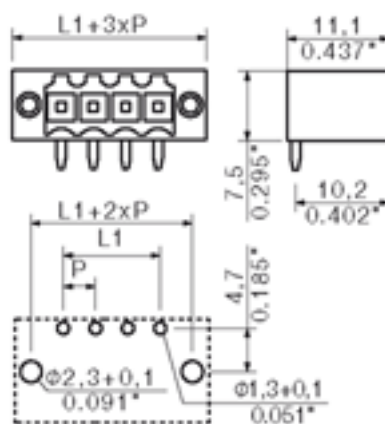
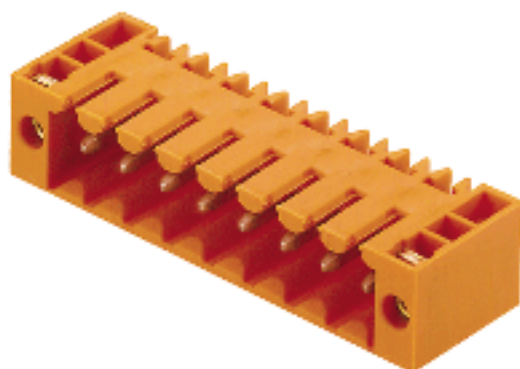
Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)
[1607040000](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) | Plug connectors, solder connection, pitch 3.5 | SL 3.5/90 | SL 3.5/90F


General ordering data

| | |
|------------------|--|
| Order No. | 1607040000 |
| Part designation | SL 3.5/2/90F3.2SN OR |
| Version | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 2, 90°, Box |
| EAN | 4008190061234 |
| Qty. | 100 pc(s). |

System parameters

| | |
|---|------------------------------|
| Fitted to PCB | Soldered connection |
| Outgoing elbow | 90° |
| Pitch | 3.5 mm |
| Pitch in inch | 0.138 inch |
| No. of poles | 2 |
| Solder pin length | 3.2 mm |
| Can be coded | Yes |
| No. of rows | 1 |
| No. of solder pins per pole | 1 |
| Dia. of fitting hole | 1.3 mm |
| Fitting hole tolerance | + 0.1 mm |
| L1 in mm | 3.5 mm |
| L1 in inch | 0.138 inch |
| Insulation resistance | 1 MΩ |
| Electric shock protection to DIN VDE 0470 | IP 10 |
| Electric shock protection to DIN VDE 0470 | Safe from back-of-hand touch |

Material data

| | |
|---------------------------|---------------------|
| Insulating material | PBT |
| Colour | orange |
| colour chart | Similar to RAL 2000 |
| Insulating material group | IIIa |
| Flammability class UL 94 | V-0 |
| CTI | >= 200 |
| Contact base material | CuSn |

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) | Plug connectors, solder connection, pitch 3.5 | SL 3.5/90 | SL 3.5/90F

Material data

| | |
|---------------------------------------|--------|
| Contact surface | tinned |
| Constant operating temp., min. | -25 °C |
| Constant operating temp., max. | 100 |
| Storage temperature, min. | -25 °C |
| Storage temperature, max. | 55 °C |
| Max. relative humidity during storage | 80 % |

DIN IEC rating data

| | |
|--|-------------------|
| Rated current, min. No. pins (Tu=20°C) | 17 A |
| Rated current, max. No. pins (Tu=20°C) | 12 A |
| Rated current, min. No. pins (Tu=40°C) | 14.5 A |
| Rated current, max. No. pins (Tu=40°C) | 10 A |
| Rated voltage for overvoltage class/pollution severity III/3 | 160 V |
| Rated impulse withstand voltage for overvoltage class/pollution severity III/3 | 2.5 kV |
| Rated voltage for overvoltage class/pollution severity III/2 | 160 V |
| Rated impulse withstand voltage for overvoltage class/pollution severity III/2 | 2.5 kV |
| Rated voltage for overvoltage class/pollution severity II/2 | 320 V |
| Rated impulse withstand voltage for overvoltage class/pollution severity II/2 | 2.5 kV |
| Short-time withstand current resistance | 3 x 1s with 100 A |

CSA rating data

| | |
|-----------------------------|-------|
| Rated voltage (Use group D) | 300 V |
| Rated current (Use group D) | 10 A |

UL 1059 rating data

| | |
|-----------------------------|-------|
| Rated voltage (Use group D) | 300 V |
| Rated current (Use group D) | 10 A |

Approvals

Approvals institutes



Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) | Plug connectors, solder connection, pitch 3.5 | SL 3.5/90 | SL 3.5/90F

Downloads

CAD Library (P-CAD Format - Standard) SL.LIB

Classifications

| | |
|------------|-------------|
| ETIM 2.0 | NK |
| ETIM 3.0 | EC001284 |
| eClass 4.1 | 27-26-07-01 |
| eClass 5.0 | 27-26-07-01 |
| eClass 5.1 | 27-26-07-04 |

Similar products

| Order No. | Part designation | Version |
|------------|-----------------------|---|
| 1607050000 | SL 3.5/3/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 3, 90°, Box |
| 1607060000 | SL 3.5/4/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 4, 90°, Box |
| 1607070000 | SL 3.5/5/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 5, 90°, Box |
| 1607080000 | SL 3.5/6/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 6, 90°, Box |
| 1607090000 | SL 3.5/7/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 7, 90°, Box |
| 1607100000 | SL 3.5/8/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 8, 90°, Box |
| 1607110000 | SL 3.5/9/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 9, 90°, Box |
| 1607120000 | SL 3.5/10/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 10, 90°, Box |
| 1607130000 | SL 3.5/11/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 11, 90°, Box |
| 1607140000 | SL 3.5/12/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 12, 90°, Box |
| 1607150000 | SL 3.5/13/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 13, 90°, Box |
| 1607160000 | SL 3.5/14/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 14, 90°, Box |
| 1607170000 | SL 3.5/15/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 15, 90°, Box |
| 1607180000 | SL 3.5/16/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 16, 90°, Box |
| 1619770000 | SL 3.5/17/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 17, 90°, Box |
| 1619780000 | SL 3.5/18/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 18, 90°, Box |
| 1619790000 | SL 3.5/19/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 19, 90°, Box |
| 1619800000 | SL 3.5/20/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 20, 90°, Box |

| | | |
|------------|-----------------------|---|
| 1619810000 | SL 3.5/21/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 21, 90°, Box |
| 1619820000 | SL 3.5/22/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 22, 90°, Box |
| 1619830000 | SL 3.5/23/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 23, 90°, Box |
| 1619840000 | SL 3.5/24/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 24, 90°, Box |