

## Excellent Integrated System Limited

Stocking Distributor

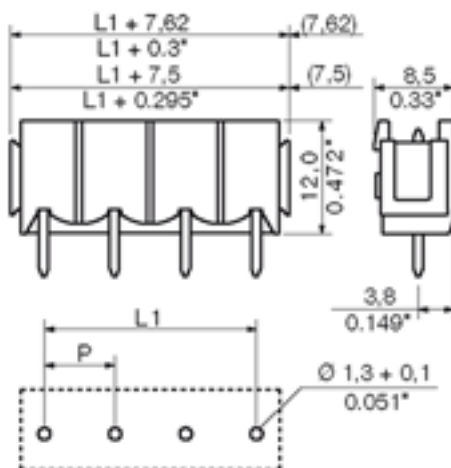
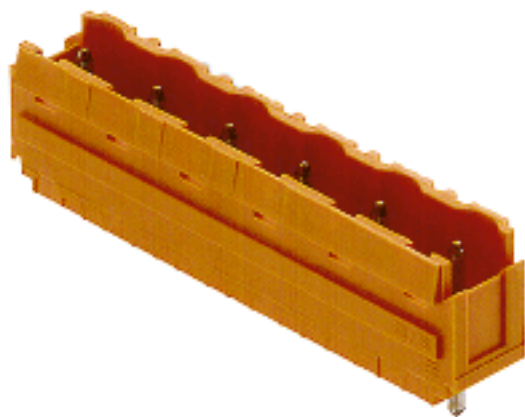
Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)  
[1625290000](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 7.50 / 7.62 mm (0.295 / 0.300 inch) | Plug connectors, solder connection, pitch 7.50/7.62 | SL 7.50-7.62/180 | SL 7.62/180B


**General ordering data**

Order No.	1625290000
Part designation	SL 7.62/6/180B3.2SN OR
Version	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 7.62 mm, No. of poles: 6, 180°, Box
EAN	4008190196349
Qty.	50 pc(s).

**System parameters**

Fitted to PCB	Soldered connection
Outgoing elbow	180°
Pitch	7.62 mm
Pitch in inch	0.3 inch
No. of poles	6
Solder pin length	3.2 mm
Can be coded	Yes
No. of rows	1
No. of solder pins per pole	1
Dia. of fitting hole	1.3 mm
Fitting hole tolerance	+ 0.1 mm
L1 in mm	38.1 mm
L1 in inch	1.5 inch
Insulation resistance	1 MΩ

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 7.50 / 7.62 mm (0.295 / 0.300 inch) | Plug connectors, solder connection, pitch 7.50/7.62 | SL 7.50-7.62/180 | SL 7.62/180B

#### System parameters

Electric shock protection to DIN VDE 0470      Safe from finger touch, plugged

#### Material data

Insulating material	PBT
Colour	orange
colour chart	Similar to RAL 2000
Insulating material group	IIIa
Flammability class UL 94	V-0
CTI	>= 200
Contact base material	CuSn
Contact surface	tinned
Constant operating temp., min.	-25 °C
Constant operating temp., max.	100 °C
Storage temperature, min.	-25 °C
Storage temperature, max.	55 °C
Max. relative humidity during storage	80 %

#### DIN IEC rating data

Rated current, min. No. pins (Tu=20°C)	18.5 A
Rated current, max. No. pins (Tu=20°C)	17 A
Rated current, min. No. pins (Tu=40°C)	16 A
Rated current, max. No. pins (Tu=40°C)	14.5 A
Rated voltage for overvoltage class/pollution severity III/3	500 V
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	6 kV
Rated voltage for overvoltage class/pollution severity III/2	630 V
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	6 kV
Rated voltage for overvoltage class/pollution severity II/2	800 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	6 kV
Short-time withstand current resistance	3 x 1s with 120 A

#### CSA rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A

#### UL 1059 rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 7.50 / 7.62 mm (0.295 / 0.300 inch) | Plug connectors, solder connection, pitch 7.50/7.62 | SL 7.50-7.62/180 | SL 7.62/180B

### Approvals

Approvals institutes



### Downloads

CAD Library (P-CAD Format - Standard) SL.LIB

### Classifications

ETIM 2.0	NK
ETIM 3.0	EC001284
eClass 4.1	27-26-07-01
eClass 5.0	27-26-07-01
eClass 5.1	27-26-07-04

### Similar products

Order No.	Part designation	Version
1625250000	SL 7.62/2/180B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 7.62 mm, No. of poles: 2, 180°, Box
1625260000	SL 7.62/3/180B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 7.62 mm, No. of poles: 3, 180°, Box
1625270000	SL 7.62/4/180B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 7.62 mm, No. of poles: 4, 180°, Box
1625280000	SL 7.62/5/180B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 7.62 mm, No. of poles: 5, 180°, Box
1625300000	SL 7.62/7/180B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 7.62 mm, No. of poles: 7, 180°, Box
1625310000	SL 7.62/8/180B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 7.62 mm, No. of poles: 8, 180°, Box
1625320000	SL 7.62/9/180B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 7.62 mm, No. of poles: 9, 180°, Box
1625330000	SL 7.62/10/180B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 7.62 mm, No. of poles: 10, 180°, Box
1625340000	SL 7.62/11/180B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 7.62 mm, No. of poles: 11, 180°, Box
1625350000	SL 7.62/12/180B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 7.62 mm, No. of poles: 12, 180°, Box