

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[VK02725000J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

RECOMMENDED P.C.B LAYOUT
TOP VIEW

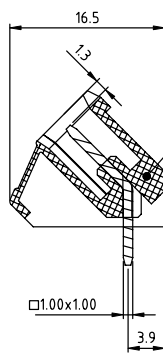

Material:

- Item①Male contact pin: Copper Tin plated
- Item②Terminal(housing): Thermoplastic (UL94V-0)
- Item③With flange nut: Brass ,M2.5

Electrical: cULus /VDE/TUV

- Voltage rating: 300V/300V/300V
- Current rating: 15A/17A/20A
- Withstanding Voltage: 1.6 KV/2.5KV/2.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:    

N = Number of poles
 $\text{DimA} = (N+2) \times 5.0$
 $\text{DimB} = (N-1) \times 5.0$
 $\text{DimC} = (N-1) \times 5.0 + 10.0$

Poles	Tolerance
2-6p	± 0.15
7-12p	± 0.20
13-18p	± 0.30
19-24p	± 0.40

PART NO.: VK xx 72 x 0 00J0 G

Solid block No. of poles	Color	RoHS compliant (lead<4%) In copper Alloy
0	Black (RAL9005)	
2	Red (RAL3001/D)	
02 2 poles	3 Orange(RAL2011/P)	
03 3 poles	4 Yellow(RAL1018/A)	
...	5 Green(RAL6018/T)	
24 24 poles	6 Blue (RAL5015/A)	
	8 Grey(RAL 7035/D)	
	9 White(RAL 1102)	
	C Green(RAL6018/U)	

mat'l. code				surface ASME Y14.5 ✓ tolerance ASME Y14.5		projection 		product family TERMINAL BLOCK			
litr	ecn no	dr	date	tolerances unless otherwise specified				title TERMINAL BLOCK			
				angles X±0.5 X.X±0.3 X'±1"				PLUGGABLE SOCKET, ASDEGREE, WITH FLANGE			
				dr	DYN ZHONG	042214	scale		dwg no		
				engr	DYN ZHONG	042214			sheet 1 of 1		size
				chr	HANKE FENG	042214			VKxx72x00JOG		A4
				appd	SHI JUN	042214			type		
sheet index		revision		A							
		1.		1.							