

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[VL04325000J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
VLxx32x000J0G	3.81 mm

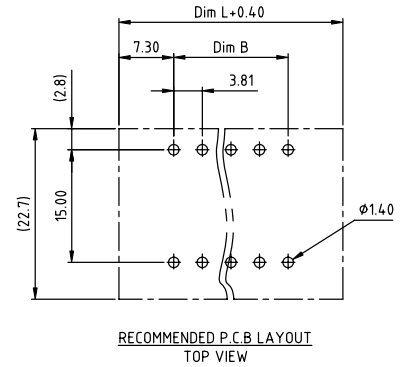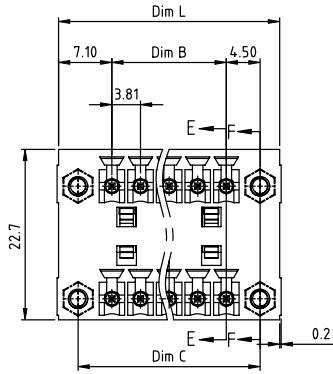

RECOMMENDED P.C.B LAYOUT
TOP VIEW

- Material:
- Item①Pin: Copper Tin plated
 - Item②Terminal(housing): Thermoplastic (UL94V-0)
 - Item③With flange nut: Brass ,M2.5
 - Item④Terminal(cover): Thermoplastic (UL94V-0)
- Electrical:
- Voltage rating: 300V
 - Current rating: 10A
 - Withstanding Voltage: 1.6 KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 260°C±5°C/5 Sec
 - Safety Approval: cULus

N=Number of poles
Dim L=(N/2-1)×3.81+14.2
Dim B=(N/2-1)×3.81
Dim C=(N/2-1)×3.81+9.0

Poles	Tolerance
2×2-2×6p	±0.15
2×7-2×12p	±0.25
2×13-2×18p	±0.35
2×19-2×24p	±0.40

PART NO.: VL xx 3 2 x 0 00J0 G

Solid block	No. of poles	Color	RoHS compliant (lead<4%) In copper Alloy
0	2	Black (RAL9005)	
2	4	Red (RAL3001/D)	
3	6	Orange(RAL2011/P)	
4	8	Yellow(RAL1018/A)	
5	10	Green(RAL6018/T)	
6	12	Blue (RAL5015/A)	
7	14	Grey(RAL7035/D)	
8	16	White(RAL1102)	
9	18	Green(RAL6018/U)	

mat'l. code	surface	tolerance	projection	product family
ASME Y14.5	ASME Y14.5	ASME Y14.5	MM	TERMINAL BLOCK
tr	ec	no	dr	date
tolerances unless otherwise specified				
angled		X.±0.5		
line		X.X±0.3		
X'±1"		X.XX±0.1		
dr	EVIN ZHONG	042814		
enr	EVIN ZHONG	042814		
chr	HANKE FENG	042814		
appd	SHI JUN	042814		
sheet index	revision	A	1	
	sheet	1		