

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Texas Instruments](#)  
[TPS51604QDSGRQ1](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Product  
Folder



Sample &  
Buy



Technical  
Documents



Tools &  
Software



Support &  
Community



TEXAS  
INSTRUMENTS

**TPS51604-Q1**

SLUSBT2A – JANUARY 2014 – REVISED AUGUST 2014

## TPS51604-Q1 Synchronous Buck FET Driver for High-Frequency CPU Core Power in Automotive Applications

### 1 Features

- Qualified for Automotive Applications
- AEC-Q100 Qualified With the Following Results:
  - Device Temperature Grade 1: –40°C to 125°C
  - Device Human Body Model ESD Classification Level H2
  - Device Charged Device Model ESD Classification Level C3B
- Reduced Dead-Time Drive Circuit for Optimized CCM
- Automatic Zero Crossing Detection for Optimized DCM Efficiency
- Multiple Low-Power Modes for Optimized Light-Load Efficiency
- Optimized Signal Path Delays for High-Frequency Operation
- Integrated BST Switch Drive Strength Optimized for Ultrabook FETs
- Optimized for 5-V FET Drive
- Conversion Input Voltage Range ( $V_{IN}$ ): 4.5 to 28 V
- 2-mm × 2-mm, 8-Pin, WSON Power-Pad Package

### 2 Applications

- Automotive Rear Seat Entertainment (RSE) Tablets Using High-Frequency CPUs With the Following Power Input:
  - Adapter
  - Battery
  - NVDC
  - 5-V or 12-V Rails

### 3 Description

The TPS51604-Q1 drivers are optimized for high-frequency CPU  $V_{CORE}$  applications. Advanced features such as reduced dead-time drive and auto zero crossing are used to optimize efficiency over the entire load range.

The  $\overline{SKIP}$  pin provides immediate CCM operation to support controlled management of the output voltage. In addition, the TPS51604-Q1 supports two low-power modes. With the PWM input in 3-state, quiescent current is reduced to 130  $\mu A$ , with immediate response. When  $\overline{SKIP}$  is held at 3-state, the current is reduced to 8  $\mu A$  (typically 20  $\mu s$  is required to resume switching). Paired with the appropriate TI controller, the drivers deliver an exceptionally high performance power supply system.


The TPS51604-Q1 device is packaged in a space saving, thermally-enhanced 8-pin, 2-mm × 2-mm WSON package and operates from –40°C to 125°C.

#### Device Information<sup>(1)</sup>

PART NUMBER	PACKAGE	BODY SIZE (NOM)
TPS51604-Q1	WSON (8)	2.00 mm × 2.00 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

#### Simplified Schematic

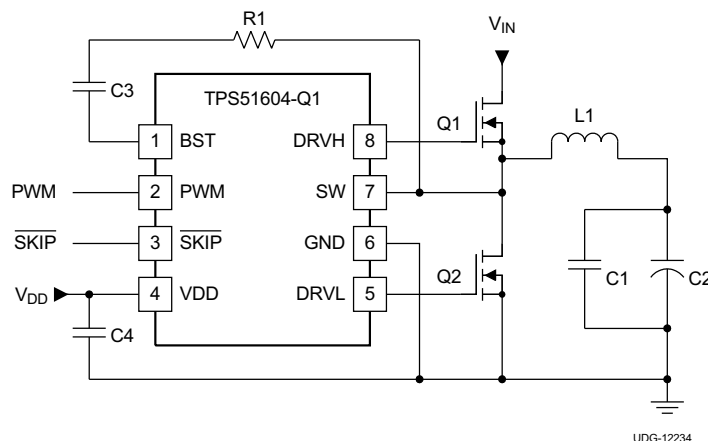

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

## TPS51604-Q1

SLUSBT2A – JANUARY 2014 – REVISED AUGUST 2014

[www.ti.com](http://www.ti.com)


### Table of Contents

<b>1 Features</b> .....	<b>1</b>	6.7 Typical Power Block MOSFET Characteristics .....	<b>9</b>
<b>2 Applications</b> .....	<b>1</b>	<b>7 Detailed Description</b> .....	<b>10</b>
<b>3 Description</b> .....	<b>1</b>	7.1 Overview .....	10
<b>4 Revision History</b> .....	<b>2</b>	7.2 Functional Block Diagram .....	10
<b>5 Pin Configuration and Functions</b> .....	<b>3</b>	7.3 Feature Description .....	10
<b>6 Specifications</b> .....	<b>4</b>	<b>8 Layout</b> .....	<b>14</b>
6.1 Absolute Maximum Ratings .....	4	8.1 Layout Guidelines .....	14
6.2 Handling Ratings .....	4	<b>9 Device and Documentation Support</b> .....	<b>15</b>
6.3 Recommended Operating Conditions .....	4	9.1 Trademarks .....	15
6.4 Thermal Information .....	4	9.2 Electrostatic Discharge Caution .....	15
6.5 Electrical Characteristics .....	5	9.3 Glossary .....	15
6.6 Typical Characteristics .....	7	<b>10 Mechanical, Packaging, and Orderable Information</b> .....	<b>15</b>

## 4 Revision History

Changes from Original (January 2014) to Revision A	Page
• Added <i>Handling Ratings</i> table, <i>Feature Description</i> section, <i>Layout</i> section, <i>Device and Documentation Support</i> section, and <i>Mechanical, Packaging, and Orderable Information</i> section .....	1
• Updated device name in <i>Thermal Information</i> .....	4
• Corrected temperature range for <i>Electrical Characteristics</i> specifications from 105°C to 125°C .....	5
• Corrected temperature range for <i>Electrical Characteristics</i> specifications from 105°C to 125°C .....	6

## 5 Pin Configuration and Functions

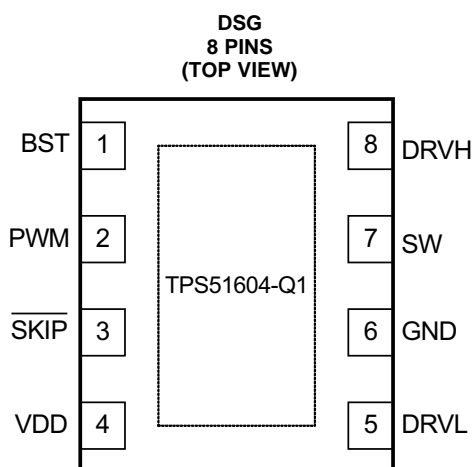

**Pin Functions**

PIN		I/O <sup>(1)</sup>	DESCRIPTION
NAME	NO.		
BST	1	I	High-side N-channel FET bootstrap voltage input; power supply for high-side driver
DRVH	8	O	High-side N-channel gate drive output
DRVL	5	O	Synchronous low-side N-channel gate drive output
GND	6	—	Synchronous low-side N-channel gate drive return and IC reference
PWM	2	I	PWM input. A tri-state voltage on this pin turns OFF both the high-side (DRVH) and low-side drivers (DRVL)
SKIP	3	I	When SKIP is LO, the zero crossing comparator is active; the power chain enters discontinuous conduction mode when the inductor current reaches zero. When SKIP is HI, the zero crossing comparator is disabled, and the driver outputs follow the PWM input. A tri-state voltage on SKIP puts the driver into a very-low power state.
SW	7	I/O	High-side N-channel gate drive return. Also, zero-crossing sense input
Thermal Pad		—	Tie to system GND plane with multiple vias
VDD	4	I	5-V power supply input; decouple to GND with a ceramic capacitor with a value of 1 $\mu$ F or greater

(1) I = Input, O = Output

## TPS51604-Q1

SLUSBT2A – JANUARY 2014 – REVISED AUGUST 2014

[www.ti.com](http://www.ti.com)

## 6 Specifications

### 6.1 Absolute Maximum Ratings<sup>(1) (2)</sup>

over operating free-air temperature (unless otherwise noted)

		MIN	MAX	UNIT
Input voltage	VDD	−0.3	6	V
	PWM, $\overline{\text{SKIP}}$	−0.3	6	
Output voltage	BST	−0.3	35	V
	BST (transient <20 ns)	−0.3	38	
	BST to SW; DRVH to SW	−0.3	6	
	SW	−2	30	
	DRVH, SW (transient <20 ns)	−5	38	
	DRVL	−0.3	6	
Ground pins	GND to PAD	−0.3	0.3	V
Operating junction temperature, $T_J$		−40	125	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to the network ground terminal unless otherwise noted.

### 6.2 Handling Ratings

			MIN	MAX	UNIT
T <sub>stg</sub>	Storage temperature range		−55	150	°C
V <sub>(ESD)</sub>	Electrostatic discharge	Human body model (HBM), per AEC Q100-002 <sup>(1)</sup>	−2	2	kV
		Charged device model (CDM), per AEC Q100-011	−750	750	V

- (1) AEC Q100-002 indicates HBM stressing is done in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

### 6.3 Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted)

		MIN	TYP	MAX	UNIT
Input voltage	VDD	4.5	5	5.5	V
	PWM, $\overline{\text{SKIP}}$	−0.1		5.5	
Output voltage	BST	−0.1		34	V
	BST to SW; DRVH to SW	−0.1		5.5	
	SW	−1		28	
	DRVL	−0.1		5.5	
Ground pins	GND to PAD	−0.1		0.1	V
Operating junction temperature, $T_J$		−40		125	°C

### 6.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		TPS51604-Q1	UNIT
		WSON (DSG) (8 PINS)	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	63.1	°C/W
$R_{\theta JC(\text{top})}$	Junction-to-case (top) thermal resistance	74.1	
$R_{\theta JB}$	Junction-to-board thermal resistance	34.3	
$\Psi_{JT}$	Junction-to-top characterization parameter	2.0	
$\Psi_{JB}$	Junction-to-board characterization parameter	34.9	
$R_{\theta JC(\text{bot})}$	Junction-to-case (bottom) thermal resistance	11.7	

- (1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](http://www.ti.com/lit/an/spra953).

## 6.5 Electrical Characteristics

These specifications apply for  $T_J = -40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  and  $V_{DD} = 5\text{ V}$  unless otherwise specified.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
VDD INPUT SUPPLY						
I <sub>CC</sub>	Supply current (operating)	V <sub>SKIP</sub> = V <sub>VDD</sub> or V <sub>SKIP</sub> = 0 V, PWM = High		160	600	μA
		V <sub>SKIP</sub> = V <sub>VDD</sub> or V <sub>SKIP</sub> = 0 V, PWM = Low		250		
		V <sub>SKIP</sub> = V <sub>VDD</sub> or V <sub>SKIP</sub> = 0 V, PWM = Float		130		
		V <sub>SKIP</sub> = Float		8		
VDD UNDERVOLTAGE LOCKOUT (UVLO)						
V <sub>UVLO</sub>	UVLO threshold	Rising threshold			4.15	V
		Falling threshold	3.7			
V <sub>UVHYS</sub>	UVLO hysteresis			0.2		V
PWM AND SKIP I/O SPECIFICATIONS						
R <sub>I</sub>	Input impedance	Pullup to VDD		1.7		MΩ
		Pulldown (to GND)		800		kΩ
V <sub>IL</sub>	Low-level input voltage			0.6		V
V <sub>IH</sub>	High-level input voltage		2.65			
V <sub>IHH</sub>	Hysteresis		0.2			
V <sub>TS</sub>	Tri-state voltage		1.3	2.0		
t <sub>THOLD(off1)</sub>	Tri-state activation time (falling) PWM		60			ns
t <sub>THOLD(off2)</sub>	Tri-state activation time (rising) PWM		60			
t <sub>TSKF</sub>	Tri-state activation time (falling) SKIP		1			μs
t <sub>TSKR</sub>	Tri-state activation time (rising) SKIP		1			
t <sub>3RD(PWM)</sub>	Tri-state exit time PWM			100		ns
t <sub>3RD(SKIP)</sub>	Tri-state exit time SKIP			50		μs
HIGH-SIDE GATE DRIVER (DRVH)						
t <sub>R(DRVH)</sub>	Rise time	DRVH rising, C <sub>DRVH</sub> = 3.3 nF; 20% to 80%		30		ns
t <sub>RPD(DRVH)</sub>	Rise time propogation delay	C <sub>DRVH</sub> = 3.3 nF		40		ns
R <sub>SRC</sub>	Source resistance	Source resistance, (V <sub>BST</sub> – V <sub>SW</sub> ) = 5 V, high state, (V <sub>BST</sub> – V <sub>DRVH</sub> ) = 0.1 V		4	8	Ω
t <sub>F(DRVH)</sub>	Fall time	DRVH falling, C <sub>DRVH</sub> = 3.3 nF		8		ns
t <sub>FPD(DRVH)</sub>	Fall-time propagation delay	C <sub>DRVH</sub> = 3.3 nF		25		ns
R <sub>SNK</sub>	Sink resistance	Sink resistance, (V <sub>BST</sub> – V <sub>SW</sub> ) forced to 5 V, low state (V <sub>DRVH</sub> – V <sub>SW</sub> ) = 0.1 V		0.5	1.6	Ω
R <sub>DRVH</sub>	DRVH to SW resistance <sup>(1)</sup>			100		kΩ
LOW-SIDE GATE DRIVER (DRVL)						
t <sub>R(DRVL)</sub>	Rise time	DRVL rising, C <sub>DRVL</sub> = 3.3 nF; 20% to 80%		15		ns
t <sub>RPD(DRVL)</sub>	Rise time propagation delay	C <sub>DRVL</sub> = 3.3 nF		35		ns
R <sub>SRC</sub>	Source resistance	Source resistance, (V <sub>VDD</sub> –GND) = 5 V, high state, (V <sub>VDD</sub> – V <sub>DRVL</sub> ) = 0.1 V		1.5	3	Ω
t <sub>F(DRVL)</sub>	Fall time	DRVL falling, C <sub>DRVL</sub> = 3.3 nF		10		ns
t <sub>FPD(DRVL)</sub>	Fall-time propagation delay	C <sub>DRVL</sub> = 3.3 nF		15		ns
R <sub>SNK</sub>	Sink resistance	Sink resistance, (V <sub>VDD</sub> – GND) = 5 V, low state, (V <sub>DRVL</sub> – GND) = 0.1 V		0.4	1.6	Ω
R <sub>DRVL</sub>	DRVL to GND resistance <sup>(1)</sup>			100		kΩ

(1) Specified by design. Not production tested.

## TPS51604-Q1

SLUSBT2A – JANUARY 2014 – REVISED AUGUST 2014


[www.ti.com](http://www.ti.com)

### Electrical Characteristics (continued)


These specifications apply for  $T_J = -40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  and  $V_{DD} = 5\text{ V}$  unless otherwise specified.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
GATE DRIVER DEAD-TIME						
t <sub>R(DT)</sub>	Rising edge		0	20	35	ns
t <sub>F(DT)</sub>	Falling edge		0	10	25	ns
ZERO CROSSING COMPARATOR						
V <sub>ZX</sub>	Zero crossing offset	SW voltage rising	−2.25	0	2.00	mV
BOOTSTRAP SWITCH						
V <sub>FBST</sub>	Forward voltage	I <sub>F</sub> = 10 mA		120	240	mV
I <sub>RLEAK</sub>	Reverse leakage	(V <sub>BST</sub> − V <sub>VDD</sub> ) = 25 V			2	μA
R <sub>DS(on)</sub>	On-resistance			12	24	Ω


## 6.6 Typical Characteristics

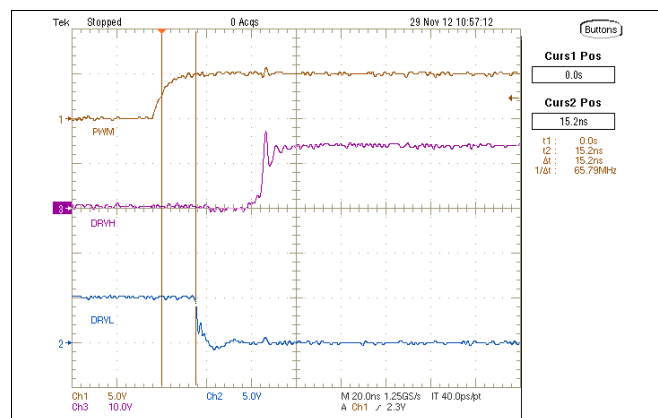


**Figure 1. PWM High to DRVL Low**

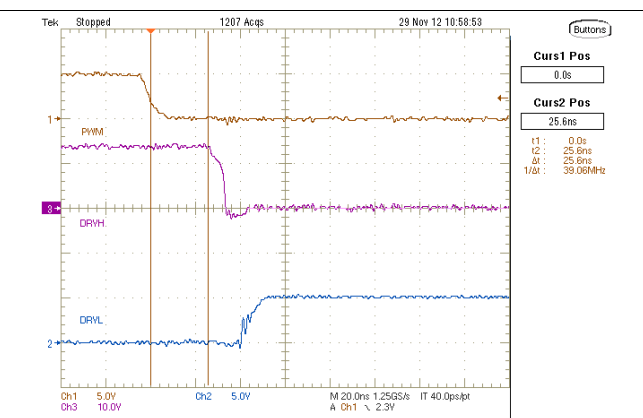


**Figure 2. PWM Low to DRVH Low**

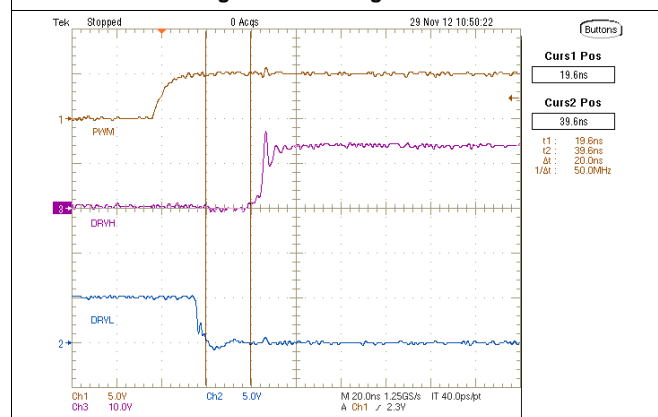


**Figure 3. DRVL Low to DRVH High**

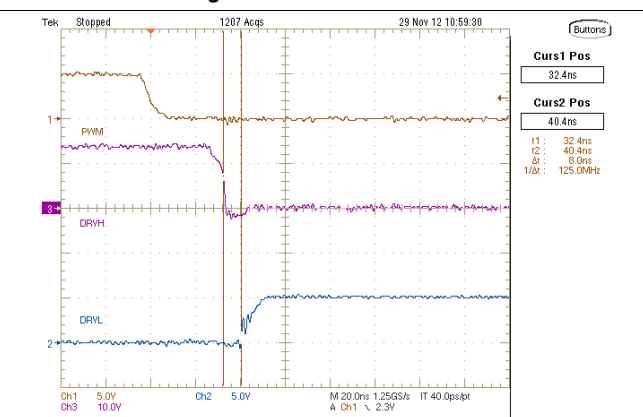

**Figure 4. DRVH Low DRVL High**

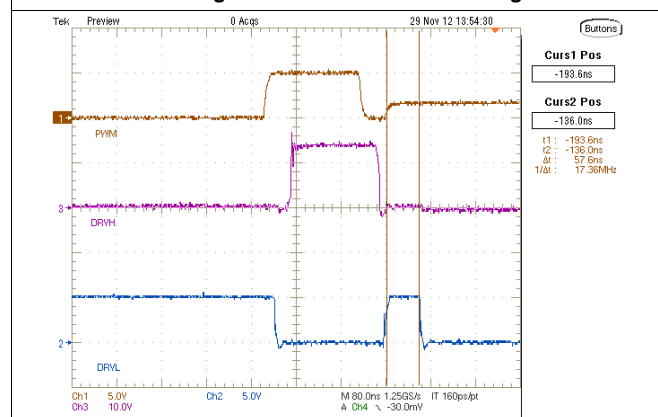

**Figure 5. PWM Low to Tri-State**

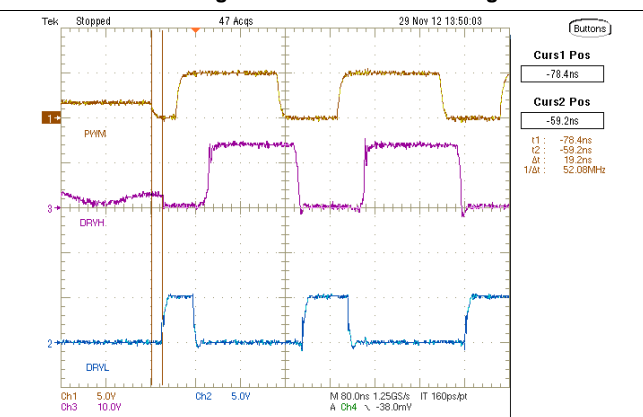

**Figure 6. PWM Tri-State to Low**




**TPS51604-Q1**


SLUSBT2A – JANUARY 2014 – REVISED AUGUST 2014

[www.ti.com](http://www.ti.com)


**Typical Characteristics (continued)**

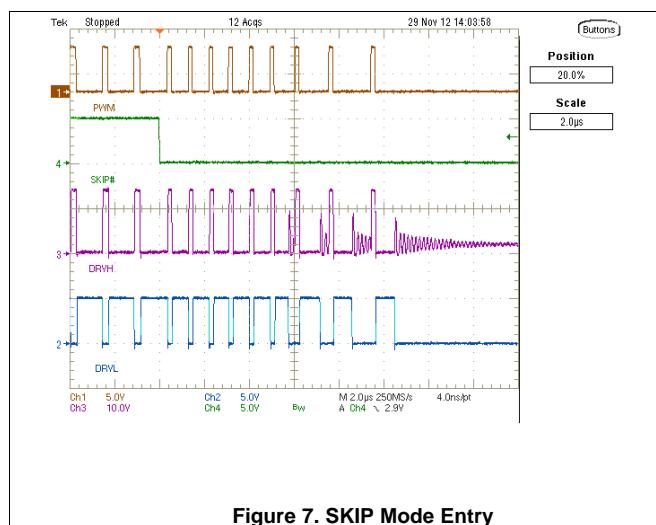


**Figure 7. SKIP Mode Entry**

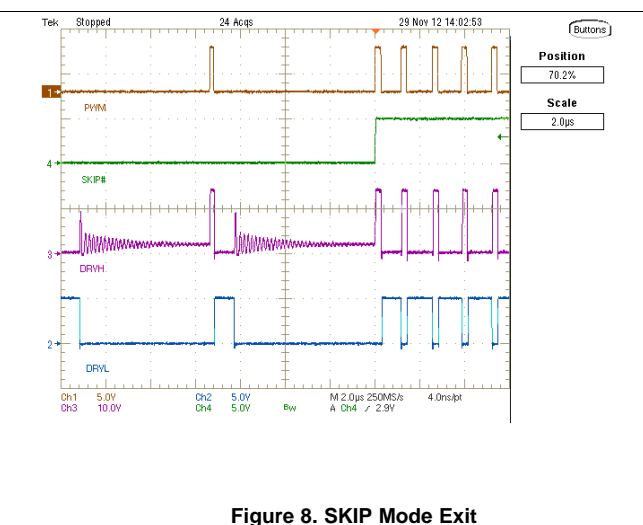


**Figure 8. SKIP Mode Exit**

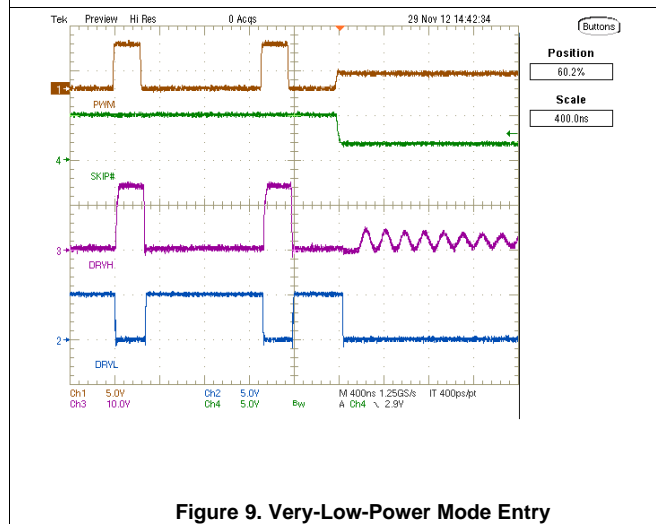


**Figure 9. Very-Low-Power Mode Entry**

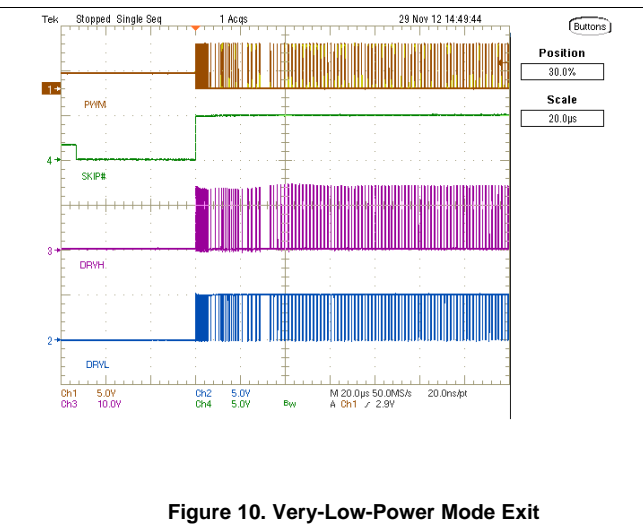

**Figure 10. Very-Low-Power Mode Exit**

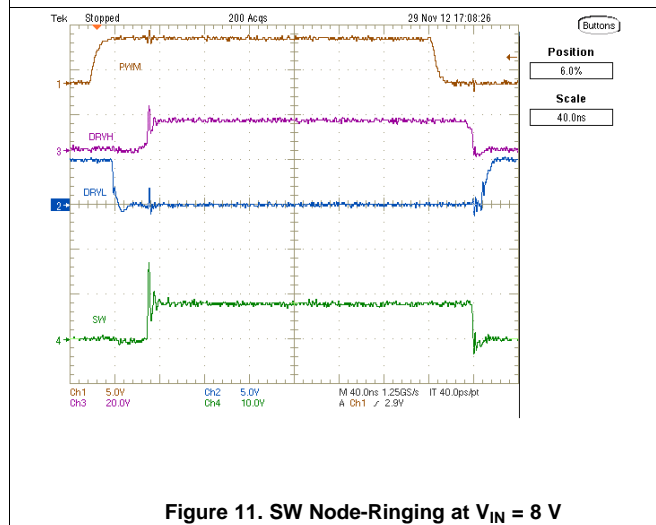

**Figure 11. SW Node-Ringing at  $V_{IN} = 8\text{ V}$**

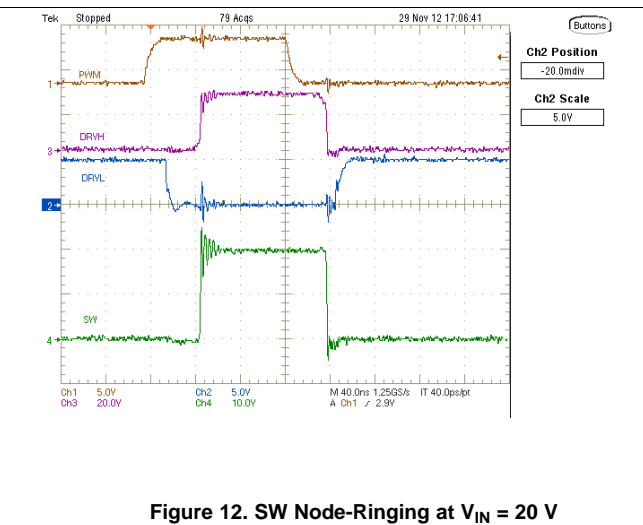

**Figure 12. SW Node-Ringing at  $V_{IN} = 20\text{ V}$**

## 6.7 Typical Power Block MOSFET Characteristics

Power block MOSFET: CSD87330 (SLPS284), Inductor: 0.22  $\mu$ F, 1.1-m $\Omega$  DCR

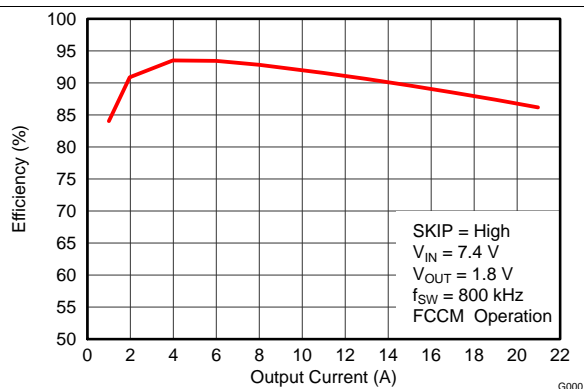


Figure 13. Efficiency vs Output Current, SKIP = High

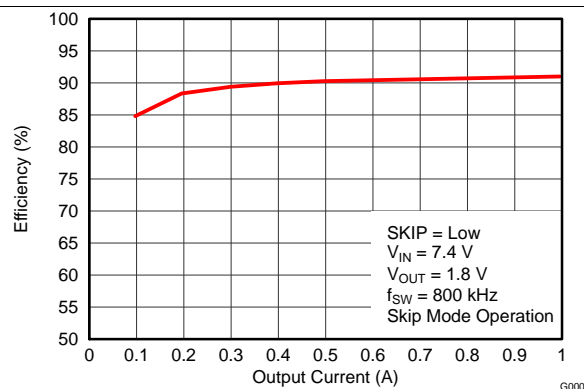


Figure 14. Efficiency vs Output Current, SKIP = Low

## TPS51604-Q1

SLUSBT2A – JANUARY 2014 – REVISED AUGUST 2014


www.ti.com

## 7 Detailed Description

### 7.1 Overview

The TPS51604-Q1 device is a synchronous-buck MOSFET driver designed to drive both high-side and low-side MOSFETs. It allows high-frequency operation with current driving capability matched to the application. The integrated boost switch is internal. The TPS51604-Q1 device employs dead-time reduction control and shoot-through protection, which helps avoid simultaneous conduction of high-side and low-side MOSFETs. Also, the drivers improve light-load efficiency with integrated DCM-mode operation using adaptive crossing detection. Typical applications yield a steady-state duty cycle of 60% or less. For high steady-state duty cycle applications, including a small external Schottky diode may help to ensure sufficient charging of the bootstrap capacitor.

### 7.2 Functional Block Diagram

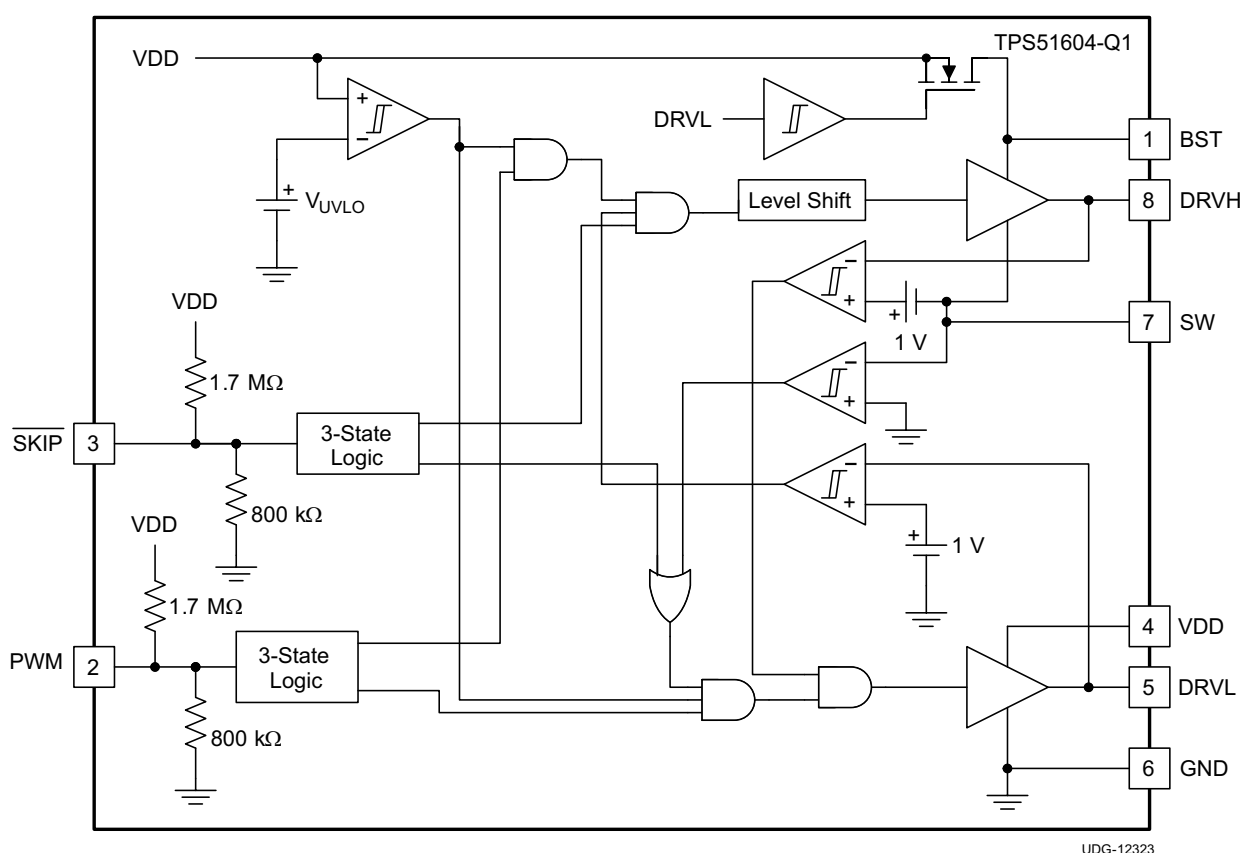

### 7.3 Feature Description


#### 7.3.1 UVLO Protection

The UVLO comparator evaluates the VDD voltage level. As  $V_{VDD}$  rises, both DRVH and DRVL hold actively low at all times until  $V_{VDD}$  reaches the higher UVLO threshold ( $V_{UVLO\_H}$ ). Then, the driver becomes operational and responds to PWM and SKIP commands. If VDD falls below the lower UVLO threshold ( $V_{UVLO\_L} = V_{UVLO\_H} - \text{Hysteresis}$ ), the device disables the driver and drives the outputs of DRVH and DRVL actively low. Figure 15 shows this function.

#### CAUTION

Do not start the driver in the very low power mode ( $\overline{\text{SKIP}} = \text{Tri-state}$ ).

## Feature Description (continued)

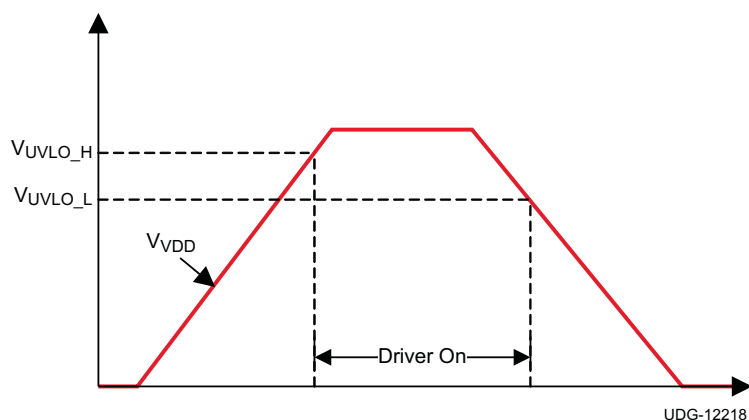


**Figure 15. UVLO Operation**

### 7.3.2 PWM Pin

The PWM pin incorporates an input tri-state function. The device forces the gate driver outputs to low when PWM is driven into the tri-state window and the driver enters a low power state with zero exit latency. The pin incorporates a weak pullup to maintain the voltage within the tri-state window during low-power modes. Operation into and out of tri-state mode follows the timing diagram outlined in Figure 16.

When VDD reaches the UVLO\_H level, a tri-state voltage range (window) is set for the PWM input voltage. The window is defined as the PWM voltage range between PWM logic high ( $V_{IH}$ ) and logic low ( $V_{IL}$ ) thresholds. The device sets high-level input voltage and low-level input voltage threshold levels to accommodate both 3.3-V (typical) and 5-V (typical) PWM drive signals.

When the PWM exits tri-state, the driver enters CCM for a period of 4  $\mu$ s, regardless of the state of the  $\overline{SKIP}$  pin. Typical operation requires this time period in order for the auto-zero comparator to resume.

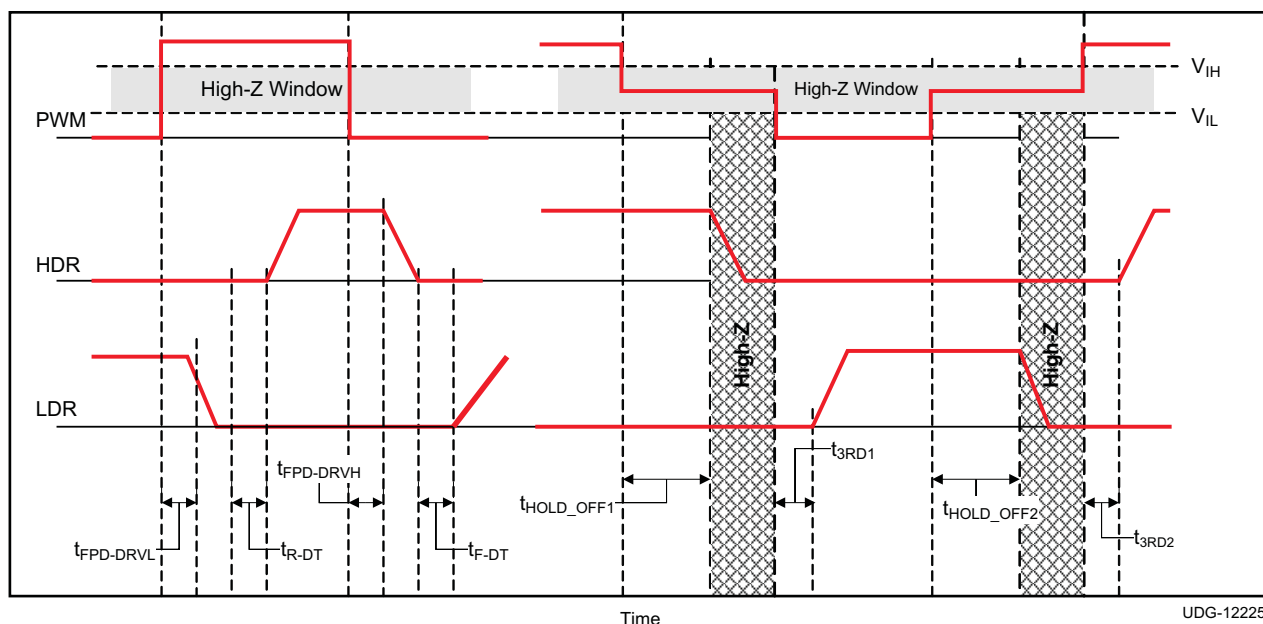

**Figure 16. PWM Tri-State Timing Diagram**

## TPS51604-Q1

SLUSBT2A – JANUARY 2014 – REVISED AUGUST 2014

www.ti.com

### Feature Description (continued)

#### 7.3.3 SKIP Pin

The  $\overline{\text{SKIP}}$  pin incorporates the input tri-state buffer as PWM. The function is somewhat different. When  $\overline{\text{SKIP}}$  is low, the zero crossing (ZX) detection comparator is enabled, and DCM mode operation occurs if the load current is less than the critical current. When  $\overline{\text{SKIP}}$  is high, the ZX comparator disables, and the converter enters FCCM mode. When both  $\overline{\text{SKIP}}$  and PWM are tri-stated, typical operation forces the gate driver outputs low and the driver enters a very-low-power state. In the low-power state, the UVLO comparator remains off to reduce quiescent current. When either  $\overline{\text{SKIP}}$  is pulled low, the driver wakes up and is able to accept PWM pulses in less than 50  $\mu\text{s}$ .

Table 1 shows the logic functions of UVLO, PWM,  $\overline{\text{SKIP}}$ , DRVH, and DRVL.

**Table 1. Logic Functions of the TPS51604-Q1**

UVLO	PWM	$\overline{\text{SKIP}}$	DRVL	DRVH	MODE
Active	—	—	Low	Low	Disabled
Inactive	Low	Low	High <sup>(1)</sup>	Low	DCM <sup>(1)</sup>
Inactive	Low	High	High	Low	FCCM
Inactive	High	H or L	Low	High	
Inactive	Tri-state	H or L	Low	Low	Low power
Inactive	—	Tri-state	Low	Low	Very-low power


(1) Until zero crossing protection occurs.

#### 7.3.3.1 Zero Crossing (ZX) Operation

The zero crossing comparator is adaptive for improved accuracy. As the output current decreases from a heavy load condition, the inductor current also reduces and eventually arrives at a *valley*, where it touches zero current, which is the boundary between continuous conduction and discontinuous conduction modes. The SW pin detects the zero-current condition. When this zero inductor current condition occurs, the ZX comparator turns off the rectifying MOSFET.


#### 7.3.4 Adaptive Dead-Time Control and Shoot-Through Protection

The driver utilizes an anti-shoot-through and adaptive dead-time control to minimize low-side body diode conduction time and maintain high efficiency. When the PWM input voltage becomes high, the low-side MOSFET gate voltage begins to fall after a propagation delay. At the same time, DRVL voltage is sensed, and high-side driving voltage starts to increase after DRVL voltage is lower than a proper threshold.

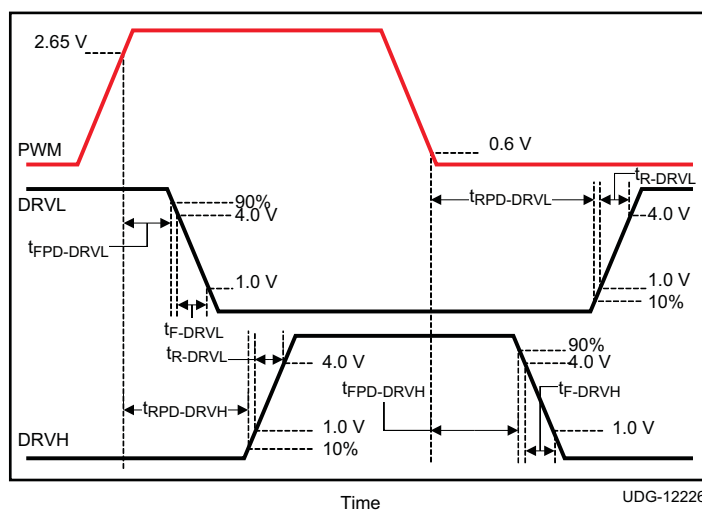

**Figure 17. Rise and Fall Timing and Propagation Delay Definitions**

Typical operation manages to near zero the dead-time between the low-side gate turn-off to high-side gate voltage turn-on, and high-side gate turn-off to low-side gate turn-on, in order to avoid simultaneous conduction of both MOSFETs, as well as to reduce body diode conduction and recovery losses. This operation also reduces ringing on the leading edge of the SW waveform.

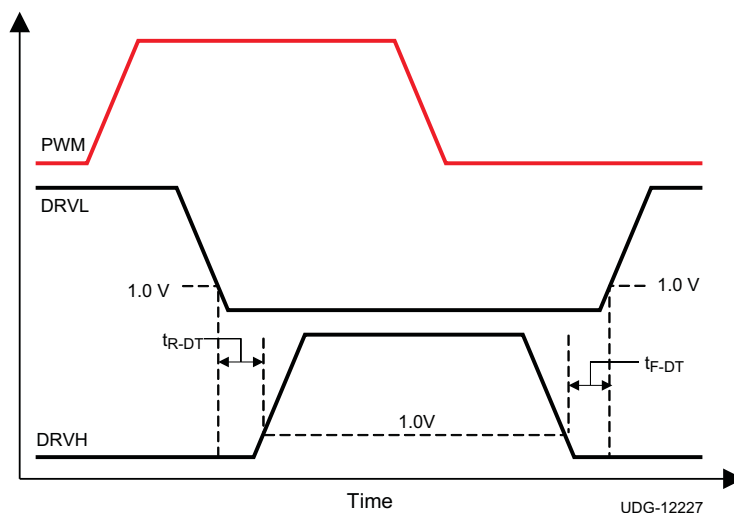

**Figure 18. Dead-Time Definitions**

### 7.3.5 Integrated Boost-Switch

To maintain a BST-SW voltage close to VDD (to get lower conduction losses on the high-side FET), the conventional diode between the VDD pin and BST pin is replaced by a FET, which is gated by the DRVL signal.

**TPS51604-Q1**

SLUSBT2A – JANUARY 2014 – REVISED AUGUST 2014

[www.ti.com](http://www.ti.com)

## 8 Layout

### 8.1 Layout Guidelines

To improve the switching characteristics and design efficiency, these layout rules must be considered:

- Locate the driver as close as possible to the MOSFETs.
- Locate the VDD and bootstrap capacitors as close as possible to the driver.
- Pay special attention to the GND trace. Use the thermal pad of the package as the GND by connecting it to the GND pin. The GND trace or pad from the driver goes directly to the source of the MOSFET, but should not include the high current path of the main current flowing through the drain and source of the MOSFET.
- Use a similar rule for the switch-node as for the GND.
- Use wide traces for DRVH and DRVL closely following the related SW and GND traces. A width of between 80 and 100 mils is preferable where possible.
- Place the bypass capacitors as close as possible to the driver.
- Avoid PWM and enable traces going close to the SW and pad where high dV/dT voltage can induce significant noise into the relatively high-impedance leads.

A poor layout can decrease the reliability of the entire system.

## 9 Device and Documentation Support

### 9.1 Trademarks

All trademarks are the property of their respective owners.

### 9.2 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### 9.3 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.





PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TPS51604QDSGRQ1	ACTIVE	WSON	DSG	8	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR		604Q	<a href="#">Samples</a>
TPS51604QDSGTQ1	ACTIVE	WSON	DSG	8	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR		604Q	<a href="#">Samples</a>

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBsolete:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



www.ti.com

**Distributor of Texas Instruments: Excellent Integrated System Limited**

Datasheet of TPS51604QD5GRQ1 - IC MOSFET DRIVER SYNC 8WSN

Contact us: [sales@integrated-circuit.com](mailto:sales@integrated-circuit.com) Website: [www.integrated-circuit.com](http://www.integrated-circuit.com)

---

**PACKAGE OPTION ADDENDUM**

---

7-Aug-2014

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TPS51604-Q1 :**

- Catalog: [TPS51604](#)

**NOTE:** Qualified Version Definitions:

- Catalog - TI's standard catalog product

## PACKAGE MATERIALS INFORMATION


### TAPE AND REEL INFORMATION



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS51604QDSGRQ1	WSO	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS51604QDSGTQ1	WSO	DSG	8	250	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2

**TAPE AND REEL BOX DIMENSIONS**

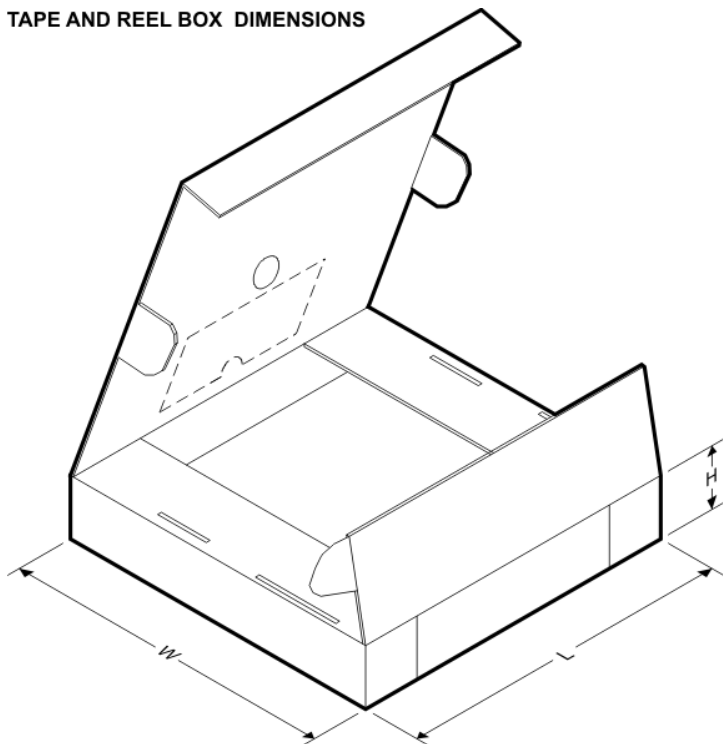


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS51604QDSGRQ1	WSON	DSG	8	3000	210.0	185.0	35.0
TPS51604QDSGTQ1	WSON	DSG	8	250	210.0	185.0	35.0


## MECHANICAL DATA

DSG (S-PWSON-N8)

PLASTIC SMALL OUTLINE NO-LEAD

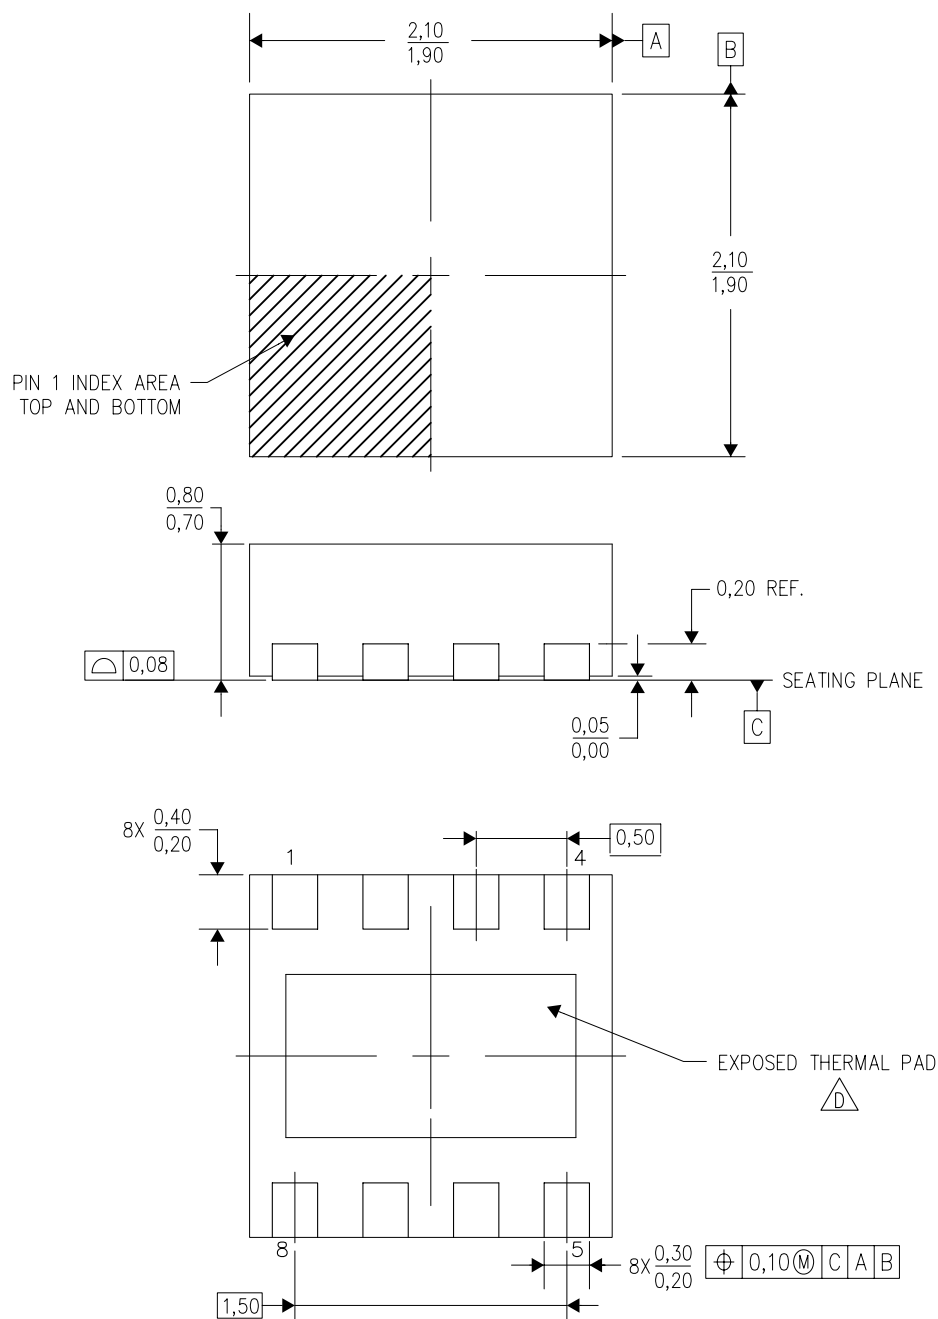

4208210/B 10/10

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Quad Flatpack, No-Leads (QFN) package configuration.
  -  D. The package thermal pad must be soldered to the board for thermal and mechanical performance. See the Product Data Sheet for details regarding the exposed thermal pad dimensions.
  - E. Falls within JEDEC MO-229.

## THERMAL PAD MECHANICAL DATA

DSG (S-PWSON-N8)


PLASTIC SMALL OUTLINE NO-LEAD

### THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

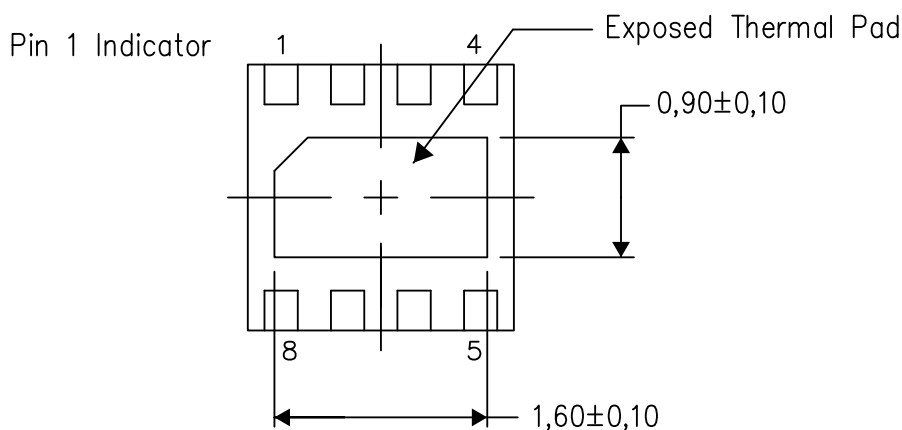

Bottom View

Exposed Thermal Pad Dimensions


4208347/G 08/13

NOTE: All linear dimensions are in millimeters

## LAND PATTERN DATA

DSG (S-PWSON-N8)

PLASTIC SMALL OUTLINE NO-LEAD

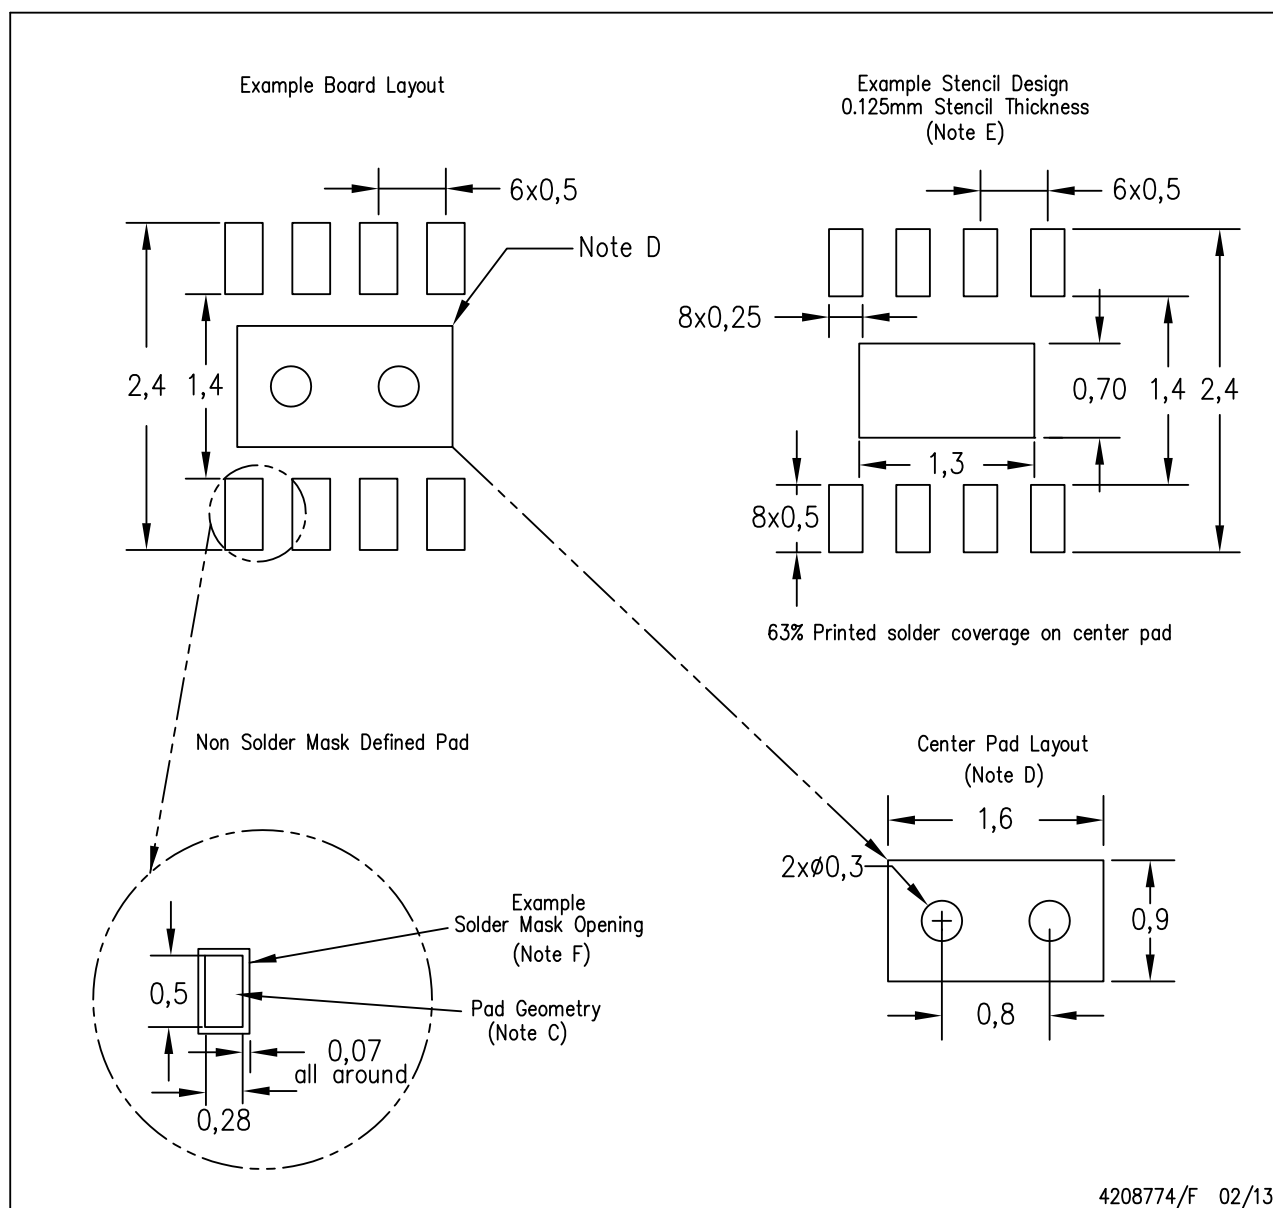

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
  - E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
  - F. Customers should contact their board fabrication site for solder mask tolerances.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)