

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[YK60102230J0G](#)



For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
YK601xx2x0J0G	10.00mm

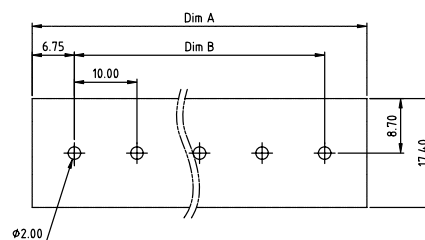

RECOMMENDED P.C.B LAYOUT
TOP VIEW

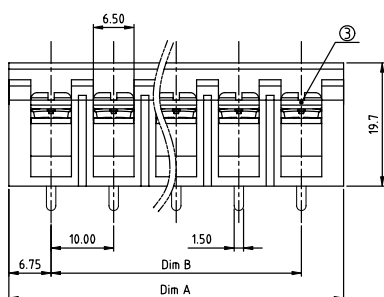

MATERIALS ELECTRICAL	
RATED VOLTAGE & CURRENT:	300 V, 20 A
WITHSTAND VOLTAGE:	AC 2000 V/Min
INSULATION RESISTANCE:	1000 MΩ OR MORE AT DC 500 V
OPERATING TEMPERATURE RANG:	-40 °C ~ +115 °C
SCREW TORQUE VALUE:	12Lb-In.
WIRE RANGE:	22 - 12 AWG
1) HOUSING:	THERMOPLASTIC, UL 94 V-0 BLACK
2) TERMINAL:	BRASS, 0.8t
3) SCREWS:	STEEL, M3.5
4) COVER MATERIAL:	PC
APPROVAL:	 US

DIMENSION	
Dim A	$N \times 10.0 + 3.5$
Dim B	$(N-1) \times 10.0$

PART NO.:YK 601xx 2 x 0 J0G

Poles	Tolerance
2p-4p	±0.20
5p-10p	±0.30
11p-24p	±0.40
25p-30p	±0.50

No. of poles	
02	2 poles
03	3 poles
...	...
30	30 poles

Plated		
Code	Terminal	Screw
0	G/F	G/F
1	G/F	Zinc
2	Tin	G/F
3	Tin	Zinc

RoHS compliant
(lead<4%)
In copper Alloy

mat'l. code					surface ASME Y14.5 ✓		tolerance ASME Y14.5		projection 		product family TERMINAL BLOCK					
ltr	ecn	no	dr	date	Y14.5 unless otherwise specified							title				
					angles		o X.±0.5 X.X±0.3				TERMINAL BLOCK					
					X*±1"		X.XX±0.1		scale		BARRIER TYPE, WITH COVER					
			dr		EVAN LU		061014				dwg no		sheet 1 of 1		size	
			engr		EVAN LU		061014				YK601xx2xJ0G		A4			
			chr		HANKE FENG		061014									
			appd		SHI JUN		061014									
sheet index		revision sheet		A 1									type CUSTOMER Drawing			