

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)
[1632360000](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

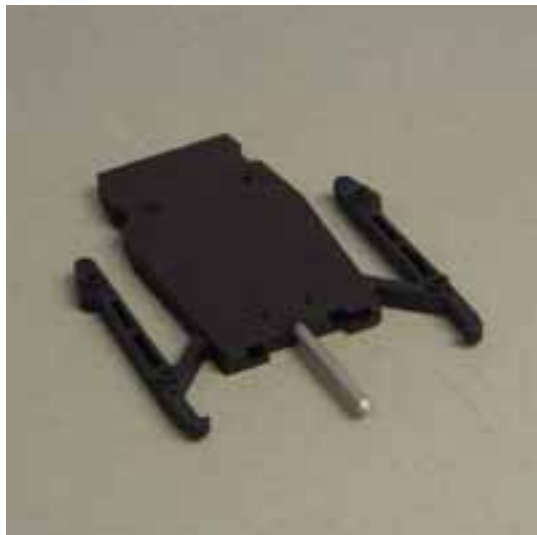

General ordering data

| | |
|------------------|---|
| Order No. | 1632360000 |
| Part designation | WTA 3/ZA WDU4 |
| Version | Modular terminal, accessories, Test adapter |
| EAN | 4008190209704 |
| Qty. | 25 pc(s). |

Product notes

| | |
|----------------------|-------------------|
| Note, technical data | Rated current 6 A |
|----------------------|-------------------|

CSA rating data

| | |
|---------------|-------|
| Voltage (CSA) | 300 V |
| CSA current | 6 A |

Conductors for clamping (additional connection)

| | |
|----------------------|---------------------|
| Clamping range, max. | 1.5 mm ² |
| Rated cross-section | 1.5 mm ² |
| Clamping screw | M 2.5 |

Conductors for clamping (rated connection)

| | |
|---|---------------------|
| Type of connection | Screw connection |
| No. of connections | 1 |
| Stripping length | 6 mm |
| Solid, min. | 0.5 mm ² |
| Solid, max. | 1.5 mm ² |
| Flexible, min. | 1 mm ² |
| Flexible, max. | 1.5 mm ² |
| Flexible with ferrule, min. (DIN 46228/1) | 0.5 mm ² |
| Flexible with ferrule, max. (DIN 46228/1) | 1.5 mm ² |

Dimensions

| | |
|--------------------------|----------|
| Width | 6 mm |
| Height of lowest version | 107.6 mm |
| Length | 66.1 mm |

Dimensions

Rating data

| | |
|---------------------|---------------------|
| Rated cross-section | 1.5 mm ² |
| Rated voltage | 250 V |
| Rated current | 6 A |

Stud connection

| | |
|-------------------------|--------|
| Tightening torque range | 0.4 Nm |
|-------------------------|--------|

Test adapter

| | |
|-------------------|--------------|
| Function | Test adapter |
| With snap-in pegs | Yes |

Test adapter dimensions

| | |
|-------------------|----------|
| Height with TS 35 | 107.6 mm |
| With snap-in pegs | Yes |

Test adapter rated data

| | |
|---------------|-------|
| Rated voltage | 250 V |
|---------------|-------|

UL rating data

| | |
|--------------|-------|
| Voltage (UL) | 300 V |
| Current (UL) | 6 A |

Approvals

Approvals institutes



Downloads

| | |
|------|--------------------------------|
| DXF | 21839_WTA_3-ZA_WDU4_DXF.dxf |
| STEP | 1632360000_21839_WTA_3_STP.stp |

Classifications

| | |
|------------|-------------|
| ETIM 2.0 | NK |
| ETIM 3.0 | EC002255 |
| eClass 4.1 | 27-14-11-99 |
| eClass 5.0 | 27-14-11-45 |
| eClass 5.1 | 27-14-11-45 |

Similar products

| Order No. | Part designation | Version |
|------------|------------------|---|
| 1632350000 | WTA 3 WDU4 | Modular terminal, accessories, Test adapter |
| 1632370000 | WTA 3/10 WDU4/10 | Modular terminal, accessories, Test adapter |