

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ebm-papst Inc.](#)  
[4118NH5P-277](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

**Product Data Sheet 4118 NH5P-277**



The engineer's choice

**ebmpapst**

**4118 NH5P-277**

**INDEX**

<b>1</b>	<b>General</b> .....	<b>3</b>
<b>2</b>	<b>Mechanics</b> .....	<b>3</b>
2.1	General.....	3
2.2	Connections.....	3
<b>3</b>	<b>Operating Data</b> .....	<b>4</b>
3.1	Operating Data - Electrical Interface - Input.....	4
3.2	Electrical Operating Data .....	5
3.3	Operating Data - Electrical Interface -Output .....	6
3.4	Electrical Features.....	6
3.5	Aerodynamic.....	7
3.6	Sound Data.....	8
<b>4</b>	<b>Environment</b> .....	<b>8</b>
4.1	General.....	8
4.2	Climatic requirements*) .....	8
<b>5</b>	<b>Safety</b> .....	<b>9</b>
5.1	Electrical Safety.....	9
5.2	Approval Tests .....	9
<b>6</b>	<b>Reliability</b> .....	<b>9</b>
6.1	General.....	9

Product Data Sheet 4118 NH5P-277

1 General

Fan type	Fan	
Rotational direction looking at rotor	clockwise	
Airflow direction	Air intake over struts	
Bearing system	Ball bearing	
Mounting position	any	


2 Mechanics

2.1 General

Width	119,0 mm	
Height	119,0 mm	
Depth	38,0 mm	
Weight	0,390 kg	
Housing material	Metal	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	wire outlet corner: 420 Ncm remaining corners: 600 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires - Plug	
Length of lead wire	L = 55 mm	
Tolerance	+/- 5,0 mm	
Wire gauge (AWG)	22	
Insulation diameter	1,70 mm	
Contact	see drawing	

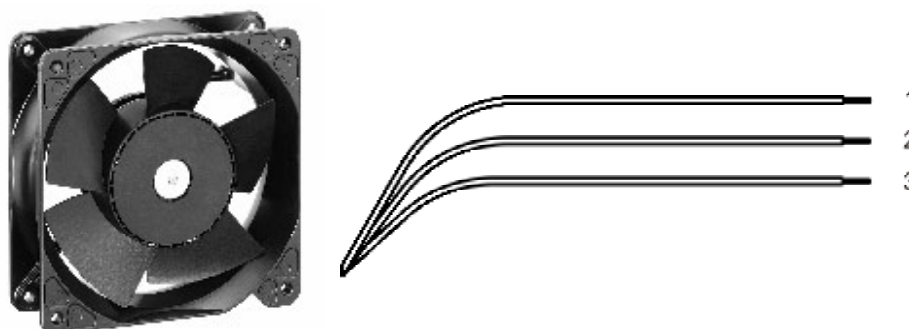

	Colour	Operation
Wire 1	red	+ UB
Wire 2	blue	- GND
Wire 3	violet	PWM

Product Data Sheet 4118 NH5P-277

3 Operating Data

3.1 Operating Data - Electrical Interface - Input

Control input	PWM
---------------	-----

Features

Input type	Open collector
------------	----------------

<p><b>Characteristics</b></p>	<table border="1"> <caption>Approximate data from the fan speed vs PWM graph</caption> <thead> <tr> <th>PWM [%]</th> <th>Speed [1/min]</th> </tr> </thead> <tbody> <tr><td>0</td><td>1000</td></tr> <tr><td>10</td><td>1200</td></tr> <tr><td>20</td><td>1800</td></tr> <tr><td>30</td><td>2800</td></tr> <tr><td>40</td><td>3800</td></tr> <tr><td>50</td><td>4800</td></tr> <tr><td>60</td><td>5800</td></tr> <tr><td>70</td><td>6800</td></tr> <tr><td>80</td><td>7200</td></tr> <tr><td>90</td><td>7500</td></tr> <tr><td>100</td><td>7500</td></tr> </tbody> </table>	PWM [%]	Speed [1/min]	0	1000	10	1200	20	1800	30	2800	40	3800	50	4800	60	5800	70	6800	80	7200	90	7500	100	7500
PWM [%]	Speed [1/min]																								
0	1000																								
10	1200																								
20	1800																								
30	2800																								
40	3800																								
50	4800																								
60	5800																								
70	6800																								
80	7200																								
90	7500																								
100	7500																								
<p><b>Schematics</b></p>																									

**Product Data Sheet 4118 NH5P-277**
**3.2 Electrical Operating Data**

Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$ : corresp. to free air flow (see section 3.5)  
 I: corresp. to arithm. mean current value

Name	Condition
PWM 0001	PWM: 100 %; f: 2 kHz

Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	36,0 V		60,0 V
Nominal voltage	$\Delta p = 0$	$U_N$		48,0 V	
Power consumption	$\Delta p = 0$	P	24,0 W	42,0 W	44,0 W
Tolerance	PWM 0001		+/- 15,0 %	+/- 10,0 %	+/- 10,0 %
Current consumption	$\Delta p = 0$	I	665 mA	875 mA	730 mA
Tolerance	PWM 0001		+/- 15,0 %	+/- 10,0 %	+/- 10,0 %
Speed	$\Delta p = 0$	n	6.200 1/min	7.500 1/min	7.500 1/min
Tolerance	PWM 0001		+/- 10,0 %	+/- 10,0 %	+/- 10,0 %
Starting current consumption				1.600 mA	
Inrush current				60.000 mA	

Name	Condition
PWM 0002	PWM: 50 %; f: 2 kHz

Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	36,0 V		60,0 V
Nominal voltage	$\Delta p = 0$	$U_N$		48 V	
Power consumption	$\Delta p = 0$	P	9,5 W	10,1 W	11,1 W
Tolerance	PWM 0002		+/- 15,0 %	+/- 10,0 %	+/- 10,0 %
Current consumption	$\Delta p = 0$	I	265 mA	210 mA	185 mA
Tolerance	PWM 0002		+/- 15,0 %	+/- 10,0 %	+/- 10,0 %
Speed	$\Delta p = 0$	n	4.200 1/min	4.200 1/min	4.200 1/min
Tolerance	PWM 0002		+/- 10,0 %	+/- 10,0 %	+/- 10,0 %

Product Data Sheet 4118 NH5P-277


3.3 Operating Data - Electrical Interface -Output

Tacho type	None
------------	------

Alarm type	None
------------	------

3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	Rectifying diode	
Max. residual current at Un	IF <= 10 mA	
Locked rotor protection	Auto restart	
Locked rotor current at Un	approx. 2.300 mA	
Clock signal t3/t4 at locked rotor	Typical: 0,5 s / 5,0 s t3: 0,4 s... 0,6 s t4: 4,8 s... 5,2 s	

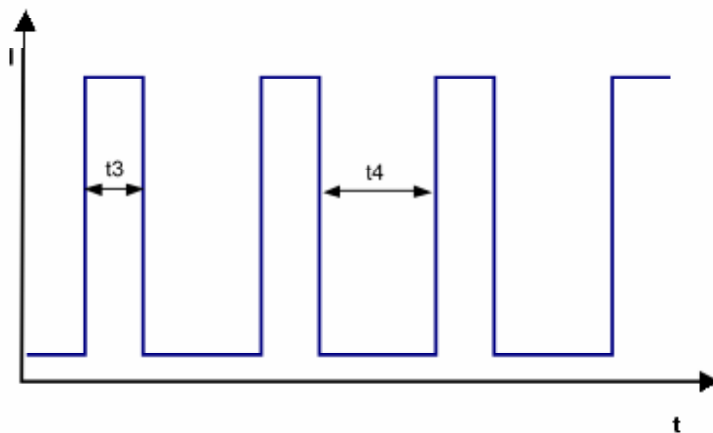

Product Data Sheet 4118 NH5P-277


3.5 Aerodynamic

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.  
 Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C;  
 In the intake and outlet area should not be any solid obstruction within 0,5 m.  
 The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

7.500 1/min at free air flow	PWM 100 %; f: 2 kHz		
------------------------------	---------------------	--	--

Max. free-air flow ( $\Delta p = 0 / \dot{V} = \text{max.}$ )	390,0 m <sup>3</sup> /h
---	-------------------------

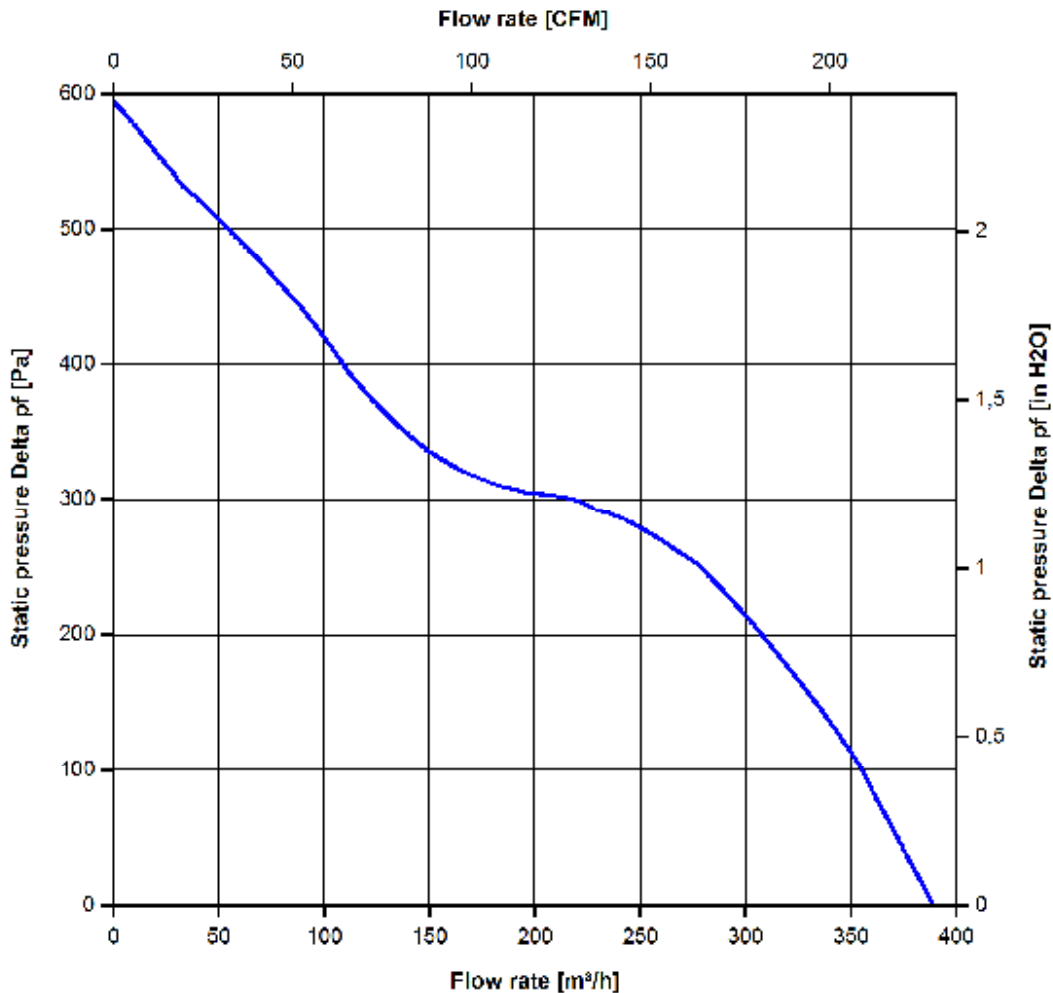



Product Data Sheet 4118 NH5P-277

### 3.6 Sound Data

Measurement conditions: Sound pressure level: 1 Meter distance between microphone and the air intake.  
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)  
 Measured in a semianchoic chamber with a background noise level of  $L_p(A) < 5 \text{ dB(A)}$   
 For further measurement conditions see section 3.5

a.) Operation condition:

7.500 1/min at free air flow	PWM 100 %; f: 2 kHz	PWM min.:	PWM max.:
------------------------------	---------------------	-----------	-----------

Optimal operating point	297,0 m3/h @ 193 Pa	
Sound power level at the optimal operating point	7,7 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	70,0 dB(A)	

## 4 Environment

### 4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	65 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

### 4.2 Climatic requirements \*)

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

\*) Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact. Please require severity levels and specification parameters from the responsible development departments

Product Data Sheet 4118 NH5P-277

**5 Safety**

**5.1 Electrical Safety**

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min.	
B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	III	

**5.2 Approval Tests**

CE	No
UL	Yes / UL507, Electric Fans
VDE	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Yes / C22.2 No. 113 Fans and Ventilators
CCC	Yes / GB 12350 Safety Requirements for small Power Motors

The approval tests are observed to:

U approval max.:60,0 V @ TU approval max.: 65,0 °C

**6 Reliability**

**6.1 General**

Life expectancy L10 at TU = 40 °C	62.500 h	
Life expectancy L10 at TU max.	35.000 h	
Life expectancy L10 Delta (40 °C)	125.000 h	

Copyright © 2008, ebm-papst, Inc. All rights reserved. This document is the property of ebm-papst, Inc. and is intended for use only by the recipient. No part of this document may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of ebm-papst, Inc.

This document is the property of ebm-papst, Inc. and is intended for use only by the recipient. No part of this document may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of ebm-papst, Inc.

**Steckergehäuse/ plug housing**  
 MOLEX: 43640-0301  
**Kontakte/ contacts**  
 MOLEX: 43031-0001

**Steckerbelegung/ PIN configuration**  
 PIN 1 rot/ red +  
 PIN 2 blau/ blue GND  
 PIN 3 violett/ violet PWM

<b>Werkstoff / Material:</b> Gehäuse / Housing: PA66 Rotor / Rotor: PA66 Lager / Bearing: 6201	<b>Werkstoff / Material:</b> Gehäuse / Housing: PA66 Rotor / Rotor: PA66 Lager / Bearing: 6201
<b>Werkstoff / Material:</b> Gehäuse / Housing: PA66 Rotor / Rotor: PA66 Lager / Bearing: 6201	<b>Werkstoff / Material:</b> Gehäuse / Housing: PA66 Rotor / Rotor: PA66 Lager / Bearing: 6201

1.) Maße für Montageausschnitt  
 2.) Anzahl und Länge der Litzen siehe BV - Blatt 1  
 - Axialspiel der Kugellager mit Feder spielfrei verspannt

1.) measures for mounting cut-out  
 2.) length and number of wires see design specification page 1  
 - ball bearing without axial clearance by a pre-loaded spring