

Excellent Integrated System Limited





Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0397000602](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

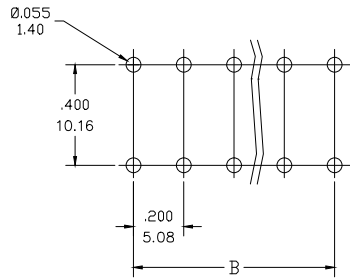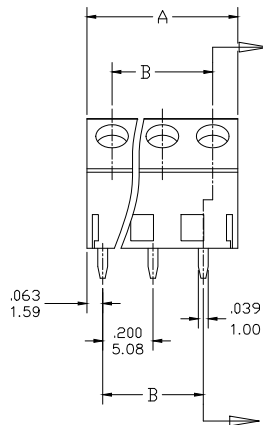


PCB LAYOUT

SPECIFICATIONS: (B)

- MATERIAL:
 - BODY: PA66 UL94 V-0
 - TERMINAL: BRASS, TIN PLATED
 - SPRING: ST. STEEL
 - BUTTON: PA66 UL94 V-0
- WIRE SIZE: 22 - 18AWG (SOL/STR)
- ELECTRICAL RATING (UL): 300V, 11A
- WIRE STRIP LENGTH: .39 (10.0mm)
- POWER FREQUENCY WITHSTAND: AC 2500V FOR 1 MINUTE
- INSULATION RESISTANCE: DC 500V, 500MΩ
- RATED IMPULSE VOLTAGE: 4000V PLUS AND MINUS 5 TIMES EACH
- OPERATING TEMPERATURE: -40°C TO +105°C
- DIMS SHOWN ARE FOR REFERENCE ONLY

PART NUMBER DATA								
CIRCUITS	PART NUMBER	ENGINEERING NUMBER	COLOR	A IN	mm	B IN	mm	
2	397000602	M600-00-02-3	GREEN	.40	10.2	.200	5.08	
3	397000603	M600-00-03-3	GREEN	.60	15.2	.400	10.15	
4	397000604	M600-00-04-3	GREEN	.80	20.3	.600	15.23	
5	397000605	M600-00-05-3	GREEN	1.00	25.4	.800	20.31	
6	397000606	M600-00-06-3	GREEN	1.20	30.5	1.000	25.39	
7	397000607	M600-00-07-3	GREEN	1.40	35.6	1.199	30.46	

CONTACT FACTORY FOR OPTIONAL COLORS

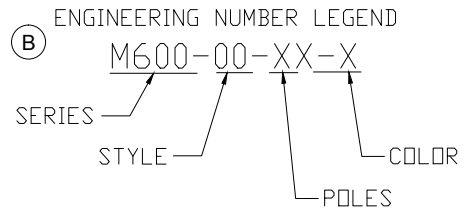

REV'D ENG NO. & SPECS		QUALITY SYMBOL		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO: JFC2014-1482		▽=0		mm INCH		DRAWN BY DATE		---		METRIC		⊙	
DRWN: RSTONE		▽=0		4 PLACES ±.005 ±.005		RSTONE 2013/10/02		TITLE		SPRING TERMINAL BLOCK			
CHKD: G FARNSW 2014/02/25				3 PLACES ±.01 ±.005		CHECKED BY DATE				.200 (5.08) PITCH			
APPR: JFMURPHY 2013/12/26				2 PLACES ±0.13 ±.01		G FARNSW 2013/12/20				NON STACKABLE			
				1 PLACE ±0.3 ±.01		APPROVED BY DATE				MOLEX INCORPORATED			
				ANGULAR ±.5°		JFMURPHY 2013/12/26		DOCUMENT NO.		SD-39700-007		SHEET NO.	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART						1 OF 1	
B						SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

REV D ENG NO. & SPECS
EC NO: JPC2014-1482 2/18/14
DRWN: RSTONE
CHKD: G FARNSW 2014/02/25
APPR: JFMURPHY 2013/12/26QUALITY SYMBOL
▽=0
▽=0GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ±.005 ±.005
3 PLACES ±.01 ±.01
2 PLACES ±0.13 ±.01
1 PLACE ±0.3 ±.01
ANGULAR ±.5°DIMENSION STYLE IN/MM
DRAWN BY DATE
CHECKED BY DATE
G FARNSW 2013/12/20
APPROVED BY DATE
JFMURPHY 2013/12/26SCALE
DESIGN UNITS METRIC
TITLE
SPRING TERMINAL BLOCK
.200 (5.08) PITCH
NON STACKABLE
MOLEX INCORPORATEDTHIRD ANGLE PROJECTION
DOCUMENT NO.
SD-39700-007
SHEET NO.
1 OF 1