

## **Excellent Integrated System Limited**

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[TE Connectivity AMP Connectors](#)  
[406904-1](#)



For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

REV. AA		REVISIONS			
REV.	DATE	BY	CHKD.	APP'D.	DESCRIPTION
C	REV. EC 02/14/2008-09				

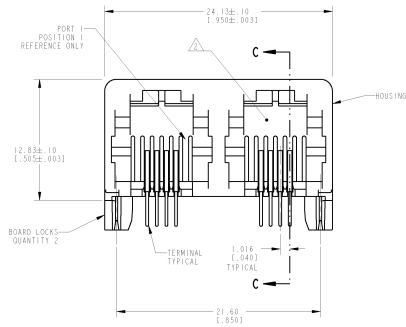

- MATERIAL: HOUSING-HIGH TEMPERATURE THERMOPLASTIC; BLACK  
 TERMINALS-0.31 (0.11) THICK COPPER ALLOY PLATED WITH 1.27μm (0.050) MINIMUM THICK GOLD IN LOCALIZED GOLD PLATE AREA, 2.54μm (0.100) MINIMUM THICK LEAD ON TERMINATION END, BOTH OVER 1.27μm (0.050) MINIMUM NICKEL OVER ENTIRE TERMINAL.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- PACKAGING MATERIAL: ANTI-STATIC, RIGID EXTRUDED, TRANSPARENT PLASTIC TUBE 558.02±.12 (22.00±.0031) LONG, 22 PIECES PER TUBE. SEE DETAIL D.

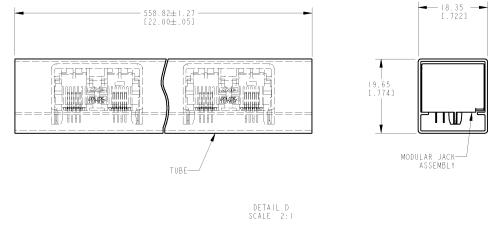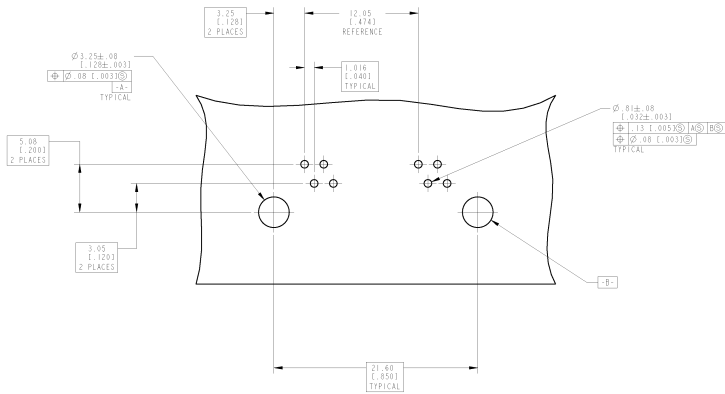

RECOMMENDED PRINTED  
 CIRCUIT BOARD LAYOUT  
 COMPONENT SIDE-VIEWED FROM TOP  
 THICKNESS 1.57±.062

TE CONNECTIVITY		AMP		406904-1	
DESCRIPTION	PART NUMBER	DESCRIPTION	PART NUMBER	DESCRIPTION	PART NUMBER
MODULAR JACK ASSEMBLY	406904-1	MODULAR JACK ASSEMBLY	406904-1	MODULAR JACK ASSEMBLY	406904-1
2 PORT, 6/A, RIGHT ANGLE		2 PORT, 6/A, RIGHT ANGLE		2 PORT, 6/A, RIGHT ANGLE	
SHRINK HOLES - 6.3-1.1		SHRINK HOLES - 6.3-1.1		SHRINK HOLES - 6.3-1.1	
DATE	11/2/2008	DATE	11/2/2008	DATE	11/2/2008
REV	0	REV	0	REV	0
BY	00778	BY	00778	BY	00778
CHKD		CHKD		CHKD	
APP'D		APP'D		APP'D	
CUSTOMER DRAWING		CUSTOMER DRAWING		CUSTOMER DRAWING	