



Distributor of ASSMANN WSW Components: Excellent Integrated System Limited
Datasheet of AU-Y1008-2 - Connector Receptacle USB TypeA, Stacked 2.0 8 Position Through Hole, Right Angle, Horizontal

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)
[AU-Y1008-2](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

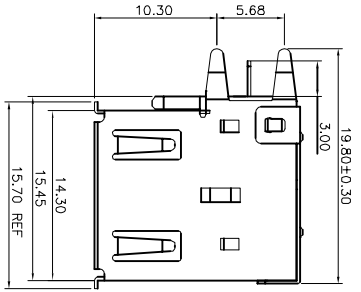

- NOTES:**
1. Material:
 - ① 1.1 Housing: PBT+30%GF UL94V-0, Color White
 - 1.2 Shell: SPCC
 - 1.3 Contact :Brass
 2. FINISH:
 - 2.1 Contact Area: Selective 30u"Au
- Solder Area: Tin Plated
 Under: Ni Plated
- 3. MECHANICAL:**
- 3.1 Mating Force: 3.57kgf Max.
 - 3.2 Unmating Force: 1.02kgf Min
 - 3.3 Durability: 1500 cycles Min
- 4. ELECTRICAL:**
- 4.1 Current Rating: 1.5A
 - 4.2 Dielectric Strength: 500V AC FOR 1 MINUTE
 - 4.3 Contact Resistance: 30mΩ Max
 - 4.4 Insulation Resistance: 1000 MΩ Min
 5. Operating temperature: -55°C TO +85°C
 6. PACKAGING: Tray

RoHS compliant

Scale	Free										
TOLERANCE											
X	±0.30										
.XX	±0.20										
.XXX	±0.10	②	Change the Pin number	04.04.2014	Winnle	Approved	04.04.2014	Winnle	ASSMANN WSW-No. ① AU-Y1008-2		
DIM	TOL	①	Change the P/NAU-Y1008-2-R to AU-Y1008-2	25.11.2013	Winnle			Drawing-No. ASS 5780 CO			
X. °	±5°							Replace			
Angle	TOL	③	Drawn	07.06.2013	Winnle			rev02			
UNIT	mm		Modification	Date	Name			SHEET			

ASSMANN
 WSW/ components

1

2

3

4

5

6

7

1

2

3

4

5

6

7