

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Visual Communications Company, LLC](#)
[VAOB-3GCDE2-C](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

BI-COLOR LED LAMP

VAOB-3GCDE2-C

Feature

- Low Power Consumption
- High Intensity
- I.C. compatible


Applications

- Commercial Outdoor Sign Board
- Front Panel Indicator
- Backlight

Description

- The (1)Yellow and (2)Green Chips are Matched For uniform Light Output
- Diffusion Lens

Package Dimension

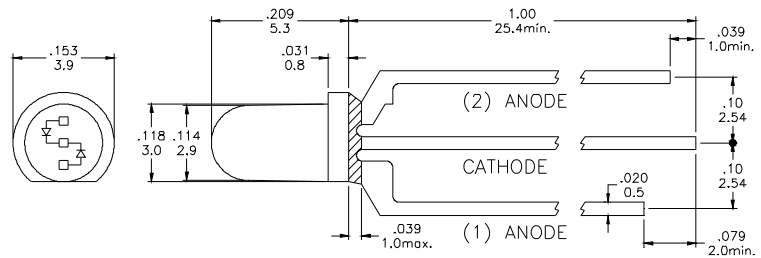

* Tolerance: $\frac{0.01}{0.25}$ Unit: $\frac{\text{inch}}{\text{mm}}$

Absolute Maximum Ratings at Ta=25°C

Symbol	Parameter	Max.	Unit
PD	Power Dissipation	100	mW
VR	Reverse Voltage	5	V
IAF	Average Forward Current	30	mA
IPF	Peak Forward Current (Duty=0.1 , 1kHz)	100	mA
—	Derating Linear Form 25°C	0.4	mA / °C
Topr	Operating Temperature Range	- 40 to + 80	°C
Tstg	Storage Temperature Range	- 40 to + 100	°C

Lead Soldering Temperature [1.6mm (0.063inch) From Body] 260°C For 5 Seconds.

Electrical / Optical Characteristics and Curves at Ta=25°C

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit	
VF	Forward Voltage	IF = 20 mA	Y		2.0	2.5	V
			G		2.2	2.8	
IR	Reverse Current	VR = 5 V			50	μA	
IV	Luminous Intensity	IF = 20 mA	Y		80		mcd.
			G		80		
λD	Dominant Wavelength	IF = 20 mA	Y		590		nm
			G		570		

Specific binning requirements- please contact our home office