

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[STMicroelectronics](#)

[STF10N105K5](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



STF10N105K5, STP10N105K5, STW10N105K5

N-channel 1050 V, 1 Ω typ., 6 A MDmesh™ K5

Power MOSFETs in TO-220, TO-220FP and TO-247 packages

Datasheet - production data


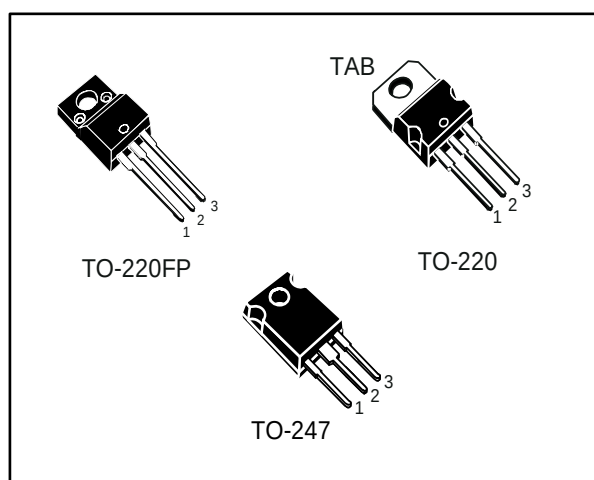


Figure 1: Internal schematic diagram

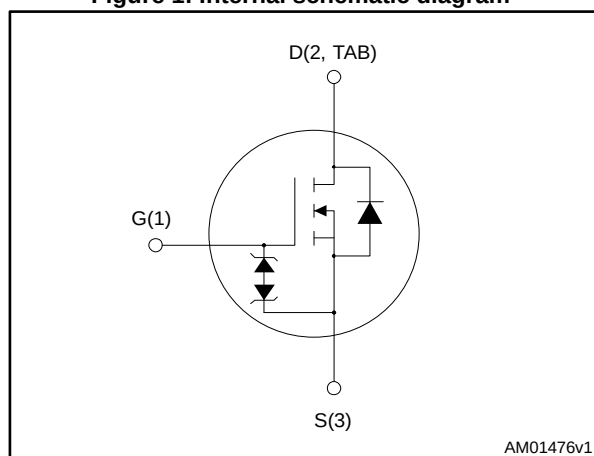

Features

Order codes	V_{DS}	$R_{DS(on)}$ max.	I_D	P_{TOT}
STF10N105K5	1050 V	1.3 Ω	6 A	30 W
STP10N105K5				130 W
STW10N105K5				130 W

- Industry's lowest $R_{DS(on)}$
- Industry's best figure of merit (FoM)
- Ultra low gate charge
- 100% avalanche tested
- Zener-protected

Applications

- Switching applications

Description

These very high voltage N-channel Power MOSFETs are designed using MDmesh™ K5 technology based on an innovative proprietary vertical structure. The result is a dramatic reduction in on-resistance and ultra-low gate charge for applications requiring superior power density and high efficiency.

Table 1: Device summary

Order codes	Marking	Package	Packaging
STF10N105K5	10N105K5	TO-220FP	Tube
STP10N105K5	10N105K5	TO-220	Tube
STW10N105K5	10N105K5	TO-247	Tube

Contents

STF10N105K5, STP10N105K5, STW10N105K5

Contents

1	Electrical ratings	3
2	Electrical characteristics	4
2.1	Electrical characteristics (curves).....	6
3	Test circuits	9
4	Package mechanical data	10
4.1	TO-220 package mechanical data	11
4.2	TO-247 package mechanical data	13
4.3	TO-220FP package mechanical data.....	15
5	Revision history	17

STF10N105K5, STP10N105K5, STW10N105K5

Electrical ratings

1 Electrical ratings

Table 2: Absolute maximum ratings

Symbol	Parameter	Value			Unit
		TO-220	TO-247	TO-220FP	
V_{GS}	Gate- source voltage	30			V
I_D	Drain current (continuous) at $T_C = 25\text{ }^{\circ}\text{C}$	6			A
I_D	Drain current (continuous) at $T_C = 100\text{ }^{\circ}\text{C}$	3.78			A
$I_{DM}^{(1)}$	Drain current (pulsed)	24			A
P_{TOT}	Total dissipation at $T_C = 25\text{ }^{\circ}\text{C}$	130		30	W
I_{AR}	Max. current during repetitive or single pulse avalanche	2			A
E_{AS}	Single pulse avalanche energy (starting $T_J = 25\text{ }^{\circ}\text{C}$, $I_D = I_{AS}$, $V_{DD} = 50\text{ V}$)	140			mJ
$dv/dt^{(2)}$	Peak diode recovery voltage slope	4.5			V/ns
$dv/dt^{(3)}$	MOSFET dv/dt ruggedness	50			V/ns
V_{ISO}	Insulation withstand voltage (RMS) from all three leads to external heatsink ($t = 1\text{ s}$; $T_C = 25\text{ }^{\circ}\text{C}$)			2500	V
T_J T_{stg}	Operating junction temperature Storage temperature	-55 to 150			$^{\circ}\text{C}$

Notes:

⁽¹⁾Pulse width limited by safe operating area.

⁽²⁾ $I_{SD} \leq 6\text{ A}$, $di/dt \leq 100\text{ A}/\mu\text{s}$, $V_{peak} \leq V_{(BR)DSS}$.

⁽³⁾ $V_{SD} \leq 840$.

Table 3: Thermal data

Symbol	Parameter	Value			Unit
		TO-220	TO-247	TO-220FP	
$R_{thj-case}$	Thermal resistance junction-case max.	0.96			$^{\circ}\text{C}/\text{W}$
	Thermal resistance junction-case max.			4.2	
$R_{thj-amb}$	Thermal resistance junction-ambient max.	62.50			$^{\circ}\text{C}/\text{W}$

Electrical characteristics

STF10N105K5, STP10N105K5, STW10N105K5

2 Electrical characteristics

($T_{case} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

Table 4: On /off states

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	Drain-source breakdown voltage	$I_D = 1\text{ mA}$, $V_{GS} = 0$	1050			V
I_{DSS}	Zero gate voltage, drain current ($V_{GS} = 0$)	$V_{DS} = 1050\text{ V}$			1	μA
		$V_{DS} = 1050\text{ V}$, $T_C = 125\text{ }^{\circ}\text{C}$			50	μA
I_{GSS}	Gate-body leakage current	$V_{GS} = \pm 20\text{ V}$; $V_{DS} = 0$			10	μA
$V_{GS(th)}$	Gate threshold voltage	$V_{DS} = V_{GS}$, $I_D = 100\text{ }\mu\text{A}$	3	4	5	V
$R_{DS(on)}$	Static drain-source on- resistance	$V_{GS} = 10\text{ V}$, $I_D = 3\text{ A}$		1	1.3	Ω

Table 5: Dynamic

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C _{iss}	Input capacitance	V _{DS} = 100 V,	-	545	-	pF
C _{oss}	Output capacitance	f = 1 MHz,		30		pF
C _{rss}	Reverse transfer capacitance	V _{GS} = 0		1.3		pF
C _{o(tr)} ⁽¹⁾	Equivalent capacitance time related	V _{GS} = 0, V _{DS} = 0 to 840 V		65		pF
C _{o(er)} ⁽²⁾	Equivalent capacitance energy related			22		pF
R _G	Intrinsic gate resistance			f = 1 MHz open drain		7
Q _g	Total gate charge	V _{DD} = 840 V, I _D = 6 A V _{GS} = 10 V		21.5		nC
Q _{gs}	Gate-source charge			3.3		nC
Q _{gd}	Gate-drain charge			15.5		nC

Notes:

⁽¹⁾Time related is defined as a constant equivalent capacitance giving the same charging time as C_{oss} when V_{DS} increases from 0 to 80% V_{DSS} .

⁽²⁾Energy related is defined as a constant equivalent capacitance giving the same stored energy as C_{oss} when V_{DS} increases from 0 to 80% V_{DSS} .

Table 6: Switching times

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	$V_{DD} = 525\text{ V}$, $I_D = 3\text{ A}$, $R_G = 4.7\text{ }\Omega$, $V_{GS} = 10\text{ V}$	-	19	-	ns
t_r	Rise time			8		ns
$t_{d(off)}$	Turn-off-delay time			50		ns
t_f	Fall time			21.5		ns

STF10N105K5, STP10N105K5, STW10N105K5

Electrical characteristics

Table 7: Source-drain diode

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I _{SD}	Source-drain current		-		6	A
I _{SDM} ⁽¹⁾	Source-drain current (pulsed)				24	A
V _{SD} ⁽²⁾	Forward on voltage	I _{SD} = 6 A, V _{GS} = 0			1.5	V
t _{rr}	Reverse recovery time	I _{SD} = 6 A, di/dt = 100 A/μs V _{DD} = 60 V		345		ns
Q _{rr}	Reverse recovery charge			3.53		μC
I _{RRM}	Reverse recovery current			20.5		A
t _{rr}	Reverse recovery time	I _{SD} = 6 A, di/dt = 100 A/μs V _{DD} = 60 V T _J = 150 °C		540		ns
Q _{rr}	Reverse recovery charge			5.05		μC
I _{RRM}	Reverse recovery current			18.5		A

Notes:

⁽¹⁾ Pulse width limited by safe operating area.

⁽²⁾ Pulsed: pulse duration = 300 μs , duty cycle 1.5%.

Table 8: Gate-source Zener diode

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)GSO}$	Gate-source breakdown voltage	$I_{GS} = \pm 1\text{ mA}$, $I_D = 0$	30	-	-	V

The built-in back-to-back Zener diodes have been specifically designed to enhance the ESD capability of the device. The Zener voltage is appropriate for efficient and cost-effective intervention to protect the device integrity. These integrated Zener diodes thus eliminate the need for external components.

Electrical characteristics

STF10N105K5, STP10N105K5, STW10N105K5

2.1 Electrical characteristics (curves)

Figure 2: Safe operating area for TO-220

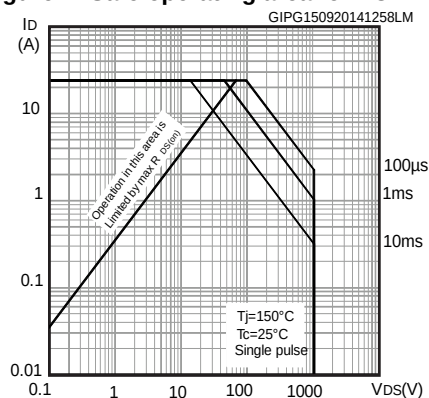


Figure 3: Thermal impedance TO-220

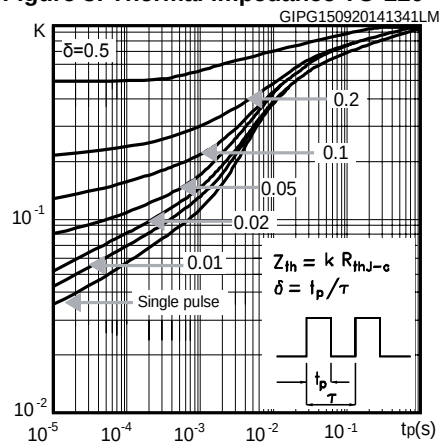


Figure 4: Safe operating area for TO-220FP

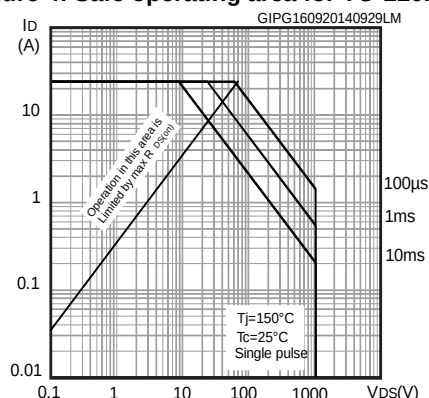


Figure 5: Thermal impedance TO-220FP

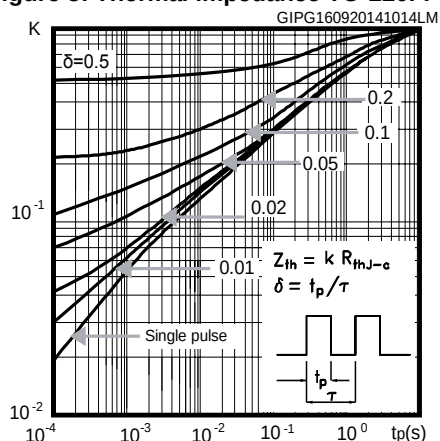


Figure 6: Safe operating area for TO-247


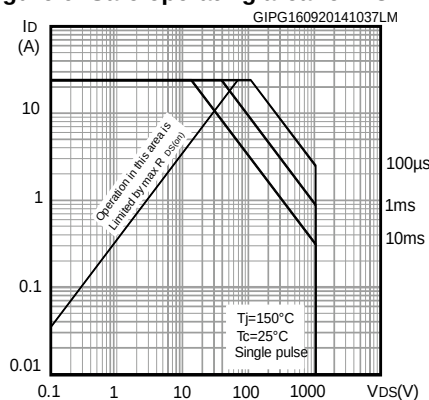


Figure 7: Thermal impedance TO-247

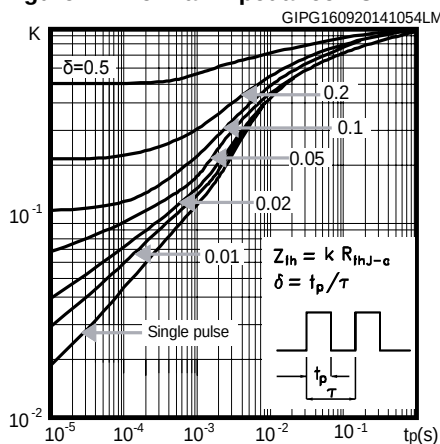

STF10N105K5, STP10N105K5, STW10N105K5

Electrical characteristics

Figure 8: Output characteristics

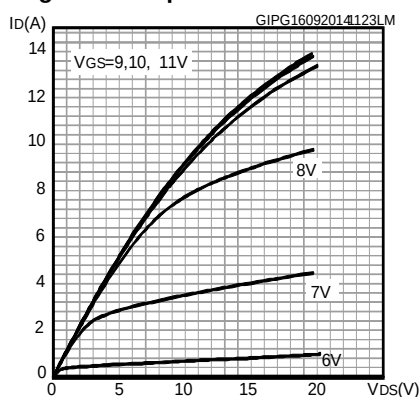


Figure 9: Transfer characteristics

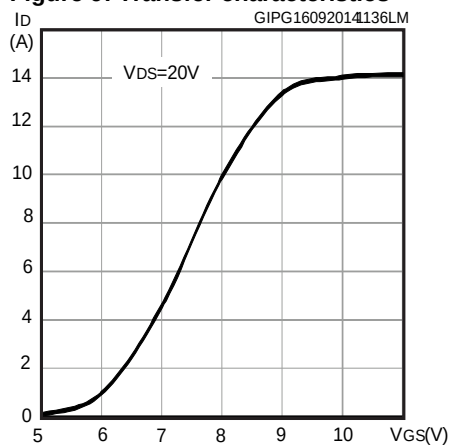


Figure 10: Gate charge vs gate-source voltage

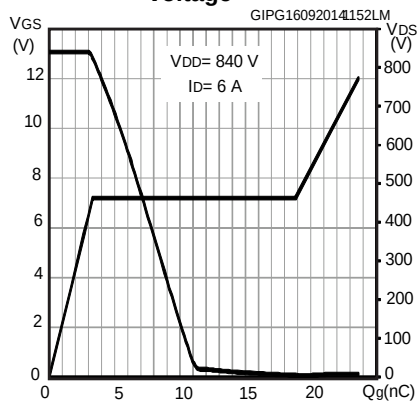


Figure 11: Static drain-source on-resistance

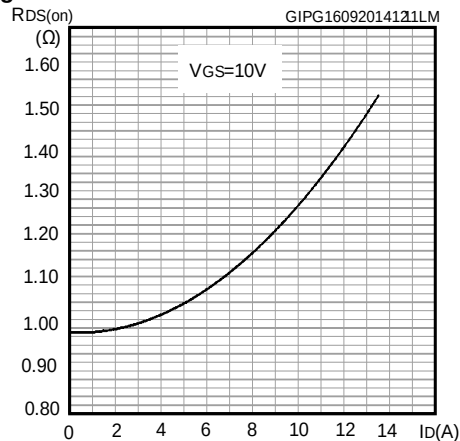


Figure 12: Capacitance variation


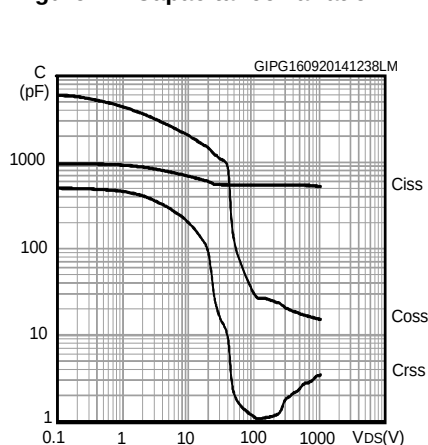


Figure 13: Normalized gate threshold voltage vs temperature

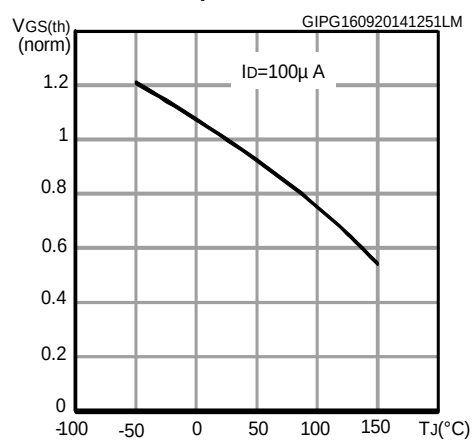

Electrical characteristics

STF10N105K5, STP10N105K5, STW10N105K5

Figure 14: Normalized on-resistance vs temperature

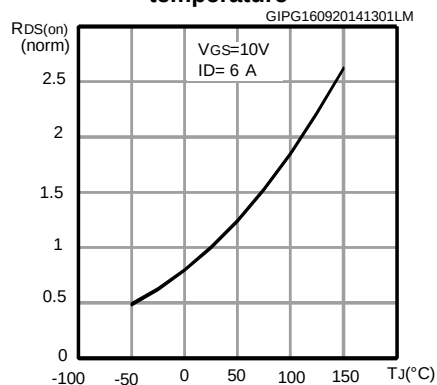


Figure 15: Source-drain diode forward characteristics

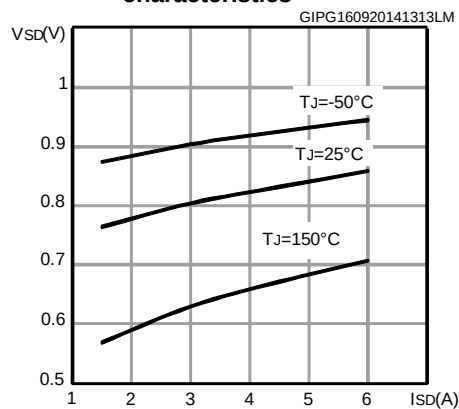


Figure 16: Normalized VBR(DSS) vs temperature


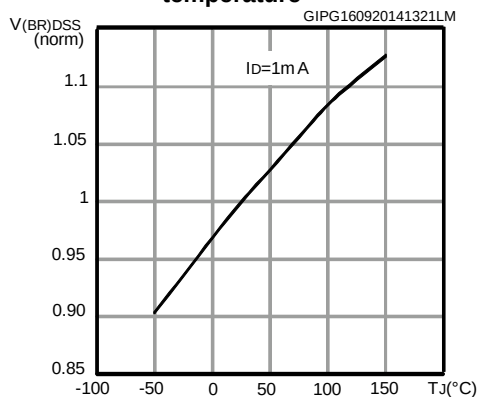


Figure 17: Maximum avalanche energy vs starting TJ

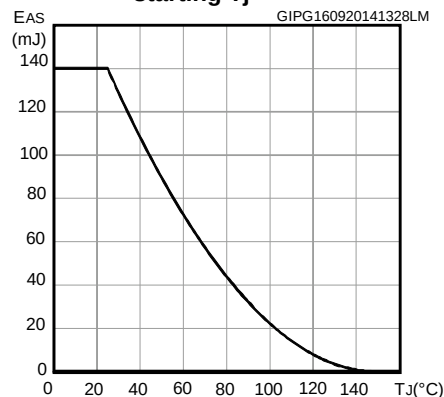


STF10N105K5, STP10N105K5, STW10N105K5

Test circuits


3 Test circuits

Figure 18: Switching times test circuit for resistive load

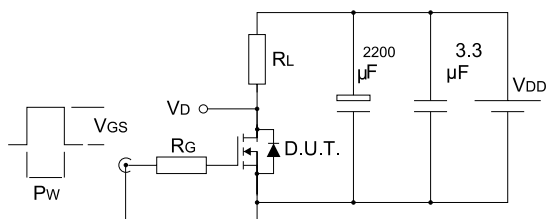


AM01468v1

Figure 19: Gate charge test circuit

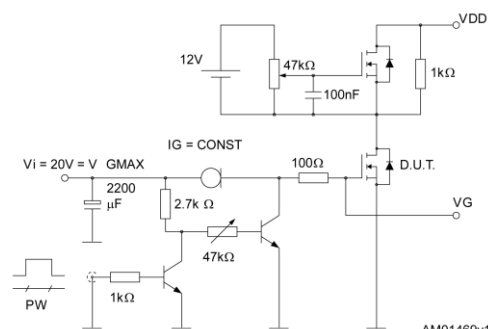


AM01469v1

Figure 20: Test circuit for inductive load switching and diode recovery times

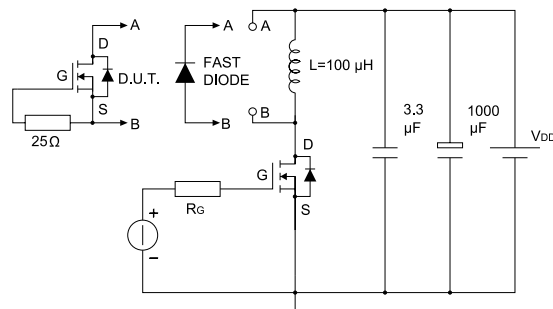


AM01470v1

Figure 21: Unclamped inductive load test circuit

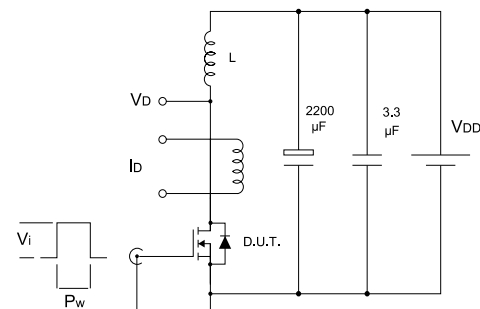


AM01471v1

Figure 22: Unclamped inductive waveform

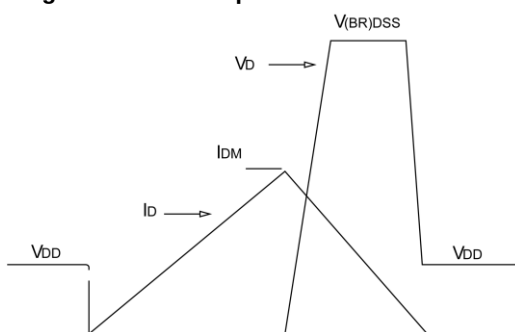

AM01472v1

Figure 23: Switching time waveform

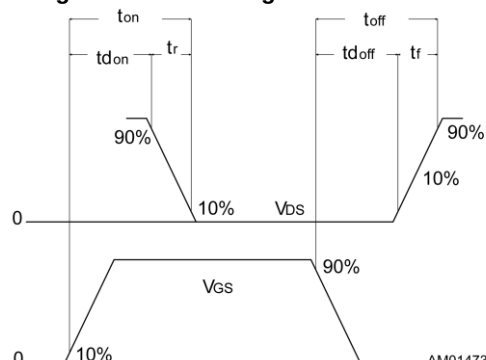

AM01473v1

4 Package mechanical data


In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: **www.st.com**. ECOPACK[®] is an ST trademark.

STF10N105K5, STP10N105K5, STW10N105K5

Package mechanical data

4.1 TO-220 package mechanical data

Figure 24: TO-220 type A drawings

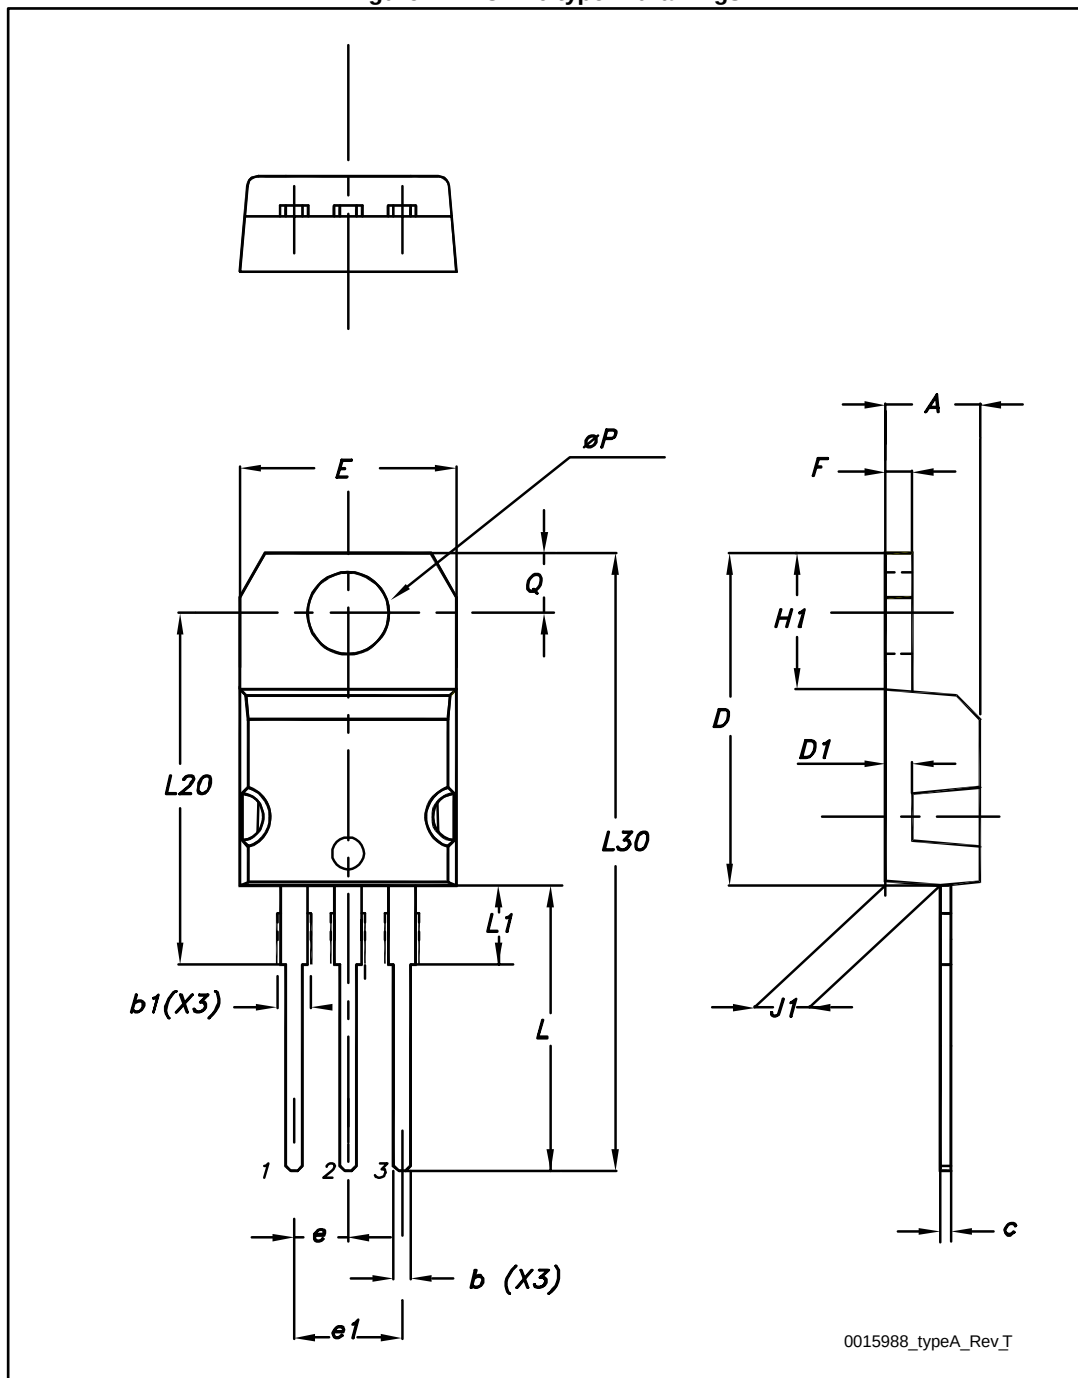

Package mechanical data

STF10N105K5, STP10N105K5, STW10N105K5

Table 9: TO-220 type A mechanical data


Dim.	mm		
	Min.	Typ.	Max.
A	4.40		4.60
b	0.61		0.88
b1	1.14		1.70
c	0.48		0.70
D	15.25		15.75
D1		1.27	
E	10		10.40
e	2.40		2.70
e1	4.95		5.15
F	1.23		1.32
H1	6.20		6.60
J1	2.40		2.72
L	13		14
L1	3.50		3.93
L20		16.40	
L30		28.90	
øP	3.75		3.85
Q	2.65		2.95

STF10N105K5, STP10N105K5, STW10N105K5

Package mechanical data

4.2 TO-247 package mechanical data

Figure 25: TO-247 drawings

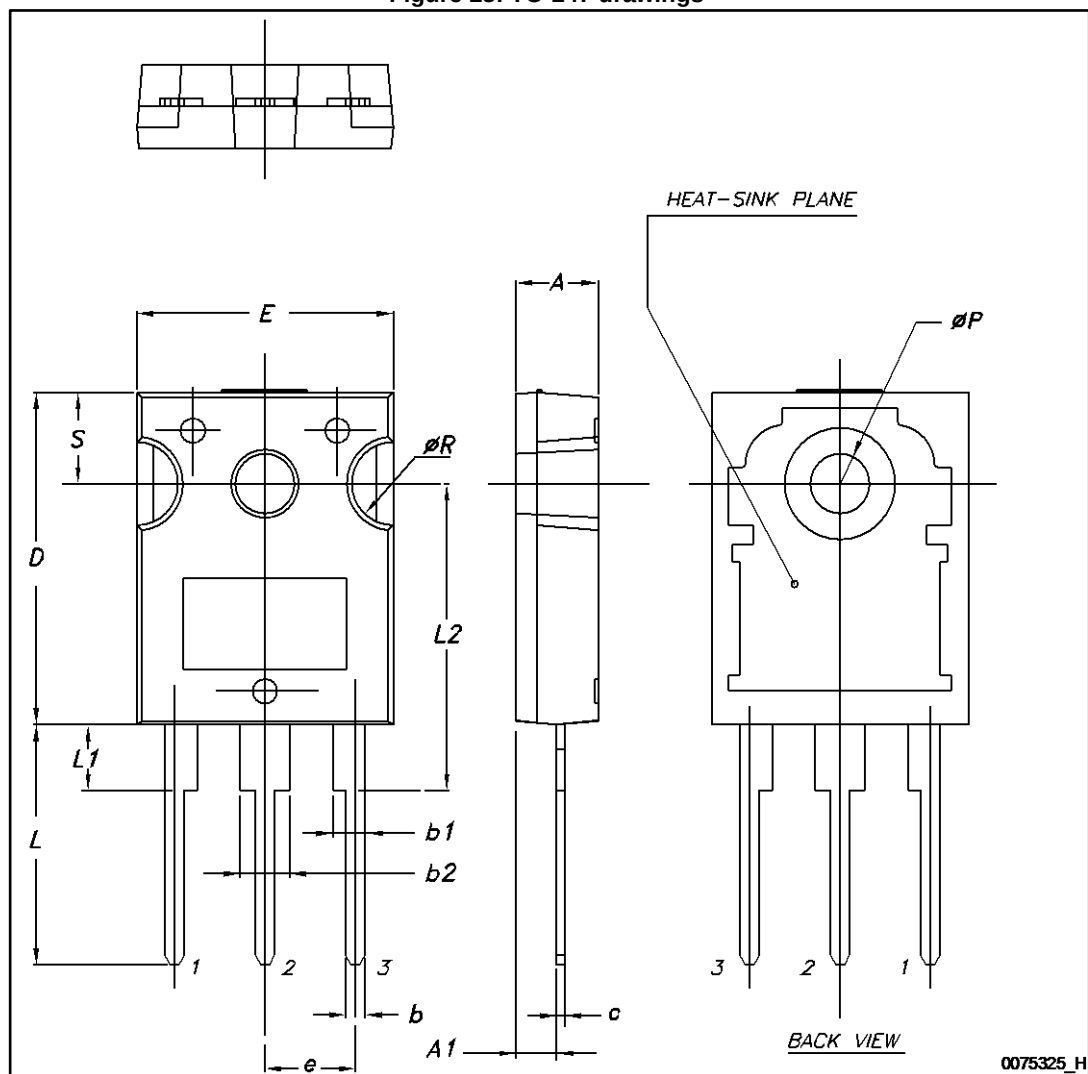

Package mechanical data
STF10N105K5, STP10N105K5, STW10N105K5
Table 10: TO-247 mechanical data


Dim.	mm		
	Min.	Typ.	Max.
A	4.85		5.15
A1	2.20		2.60
b	1.0		1.40
b1	2.0		2.40
b2	3.0		3.40
c	0.40		0.80
D	19.85		20.15
E	15.45		15.75
e	5.30	5.45	5.60
L	14.20		14.80
L1	3.70		4.30
L2		18.50	
øP	3.55		3.65
øR	4.50		5.50
S	5.30	5.50	5.70

STF10N105K5, STP10N105K5, STW10N105K5

Package mechanical data

4.3 TO-220FP package mechanical data

Figure 26: TO-220FP drawings

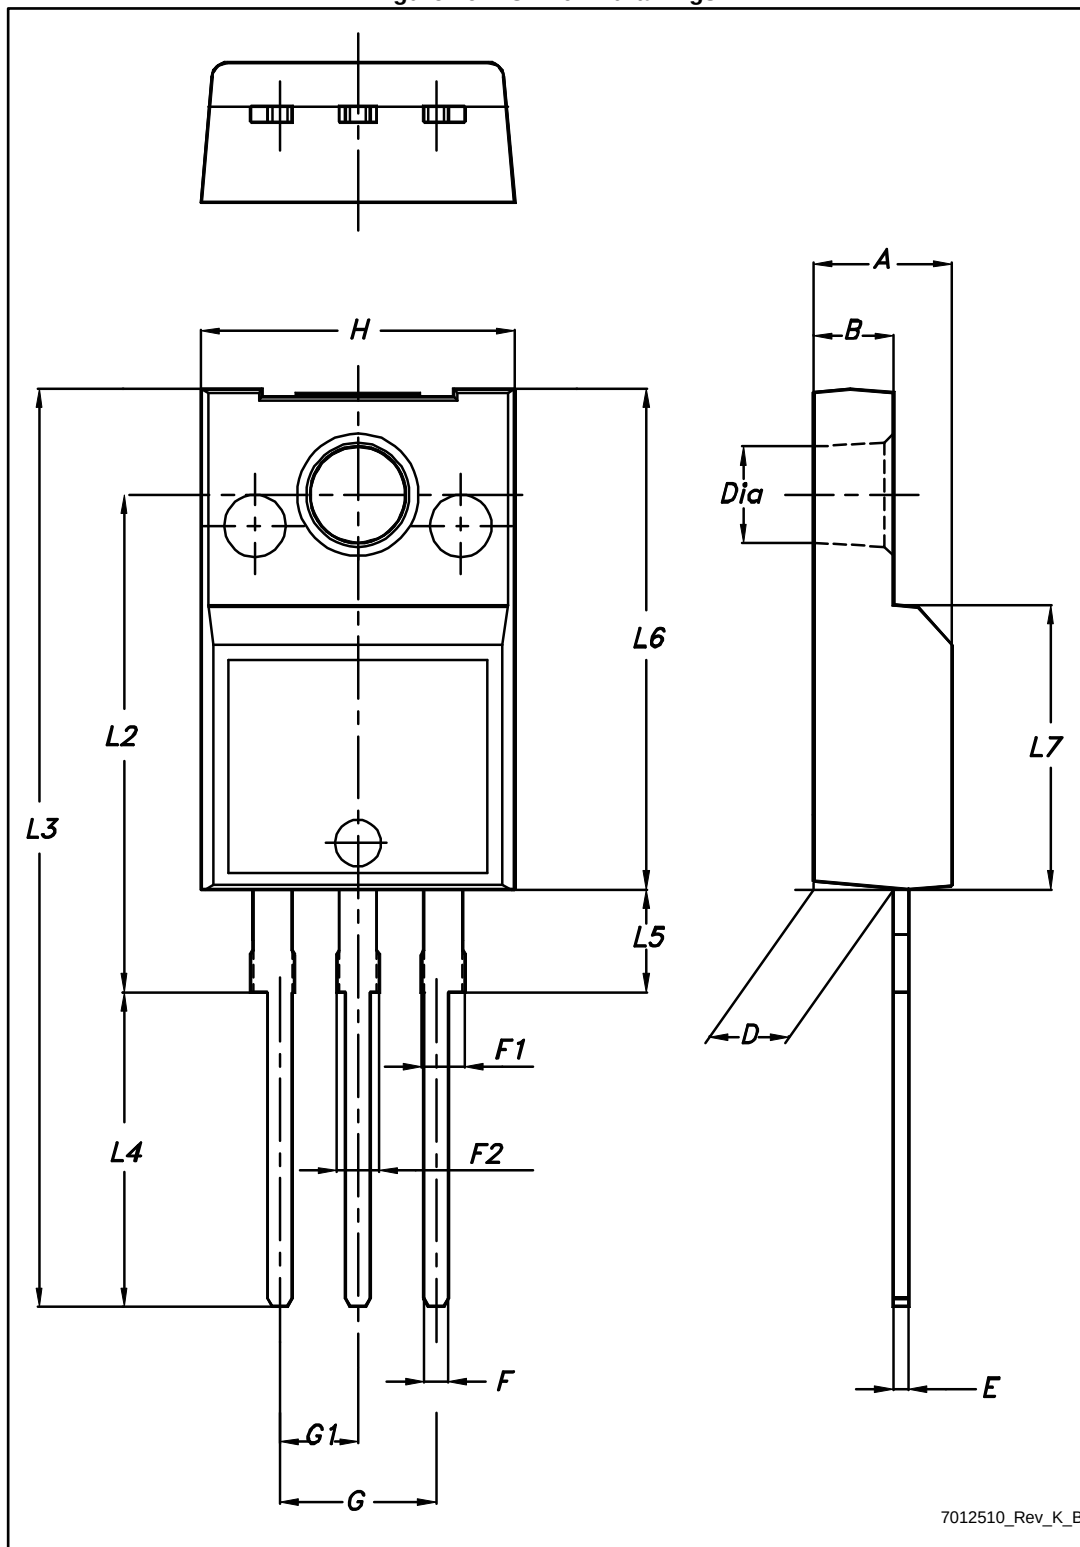

Package mechanical data

STF10N105K5, STP10N105K5, STW10N105K5

Table 11: TO-220FP mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	4.4		4.6
B	2.5		2.7
D	2.5		2.75
E	0.45		0.7
F	0.75		1
F1	1.15		1.70
F2	1.15		1.70
G	4.95		5.2
G1	2.4		2.7
H	10		10.4
L2		16	
L3	28.6		30.6
L4	9.8		10.6
L5	2.9		3.6
L6	15.9		16.4
L7	9		9.3
Ø	3		3.2

5 Revision history

Table 12: Document revision history

Date	Revision	Changes
07-Oct-2014	1	First release.
14-Oct-2014	2	Document status promoted from preliminary to production data.

STF10N105K5, STP10N105K5, STW10N105K5

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2014 STMicroelectronics – All rights reserved