

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[C-TON Industries](#)
[PLT](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

Barometric Pressure Transmitter

Model PLT

DESCRIPTION & FEATURES

The PLT converts the absolute pressure sensed by an integrated silicon sensor to a 4-20 mA signal. The sensor is mounted directly on the track mounted transmitter board. The 4-20 mA output is proportional to 27.0-31.0"hg.

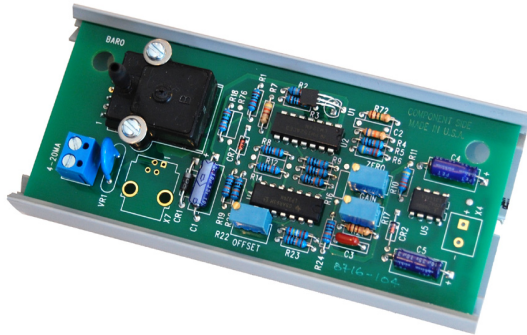

Track Mounted

SPECIFICATIONS

Range:	27.0-31.0"hg = 4-20 mA output
Accuracy:	+/-0.05"hg
Transmitter Dimensions:	Track Mount 2.5"W x 5.25"L x 2.00"H
Shipping Weight:	1 lb.
Operating Temperature:	0 to 60° C
Transmitter Connections:	Screw terminals for 12AWG or smaller
Transmitter Power:	Powered by the 4-20 mA loop current

ORDERING INFO

PART NUMBER

PLT Track mounted barometric pressure sensor

ACCESSORIES

DK191 Loop Powered Display Series
 DK190F Loop Powered Display
 DK807/907 Loop Powered Display Series
 BDR-924/999 4-20 mA Controlled Display Series
 PW1.0 Power Supply
 PW1.5 Power Supply
 PW2-24 Power Supply
 CVC 4-20 mA Calibrator

