

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[10123908-A21LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER

10123908-XXXLF

MATERIAL

HOUSING : THERMO PLASTIC UL94V-0 BLACK
CONTACT : COPPER ALLOY
PEG : COPPER ALLOY






PART NO. SCHEMATIC: 10123908 - XX X LF

TERMINAL PLATING
00: NO PLATING
G2: GOLD FLASH 1~3μ" OVER NI 50~100μ"
A2: CONTACT AREA AND SOLDER AREA :
SELECTION GOLD 1μ" OVER NI 50~100μ"
A7: CONTACT AND SOLDER TAIL AREA GOLD PLATING
10μ" MIN OVER NI 50~100μ"

PACKING
0: TAPE&REEL.STD
1: TAPE&REEL.RVS

PRODUCT SPEC.: GS-12-1111
PACKAGE SPEC.: GS-14-2284

THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004
THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK
TEMPERATURE FOR 10 SECONDS IN A CONVECTION, IR OR
VAPOR PHASE REFLOW OVEN.

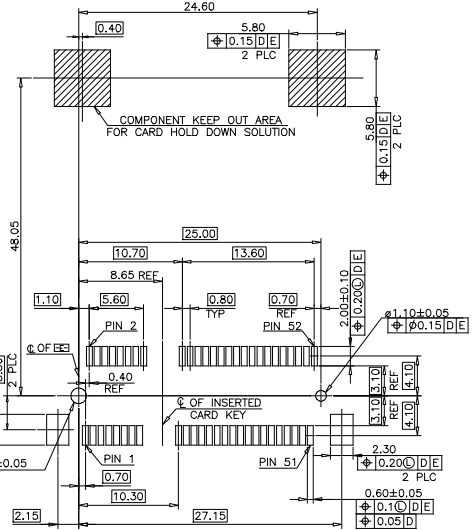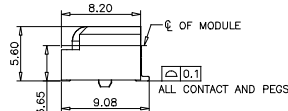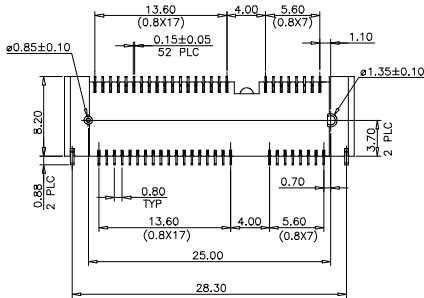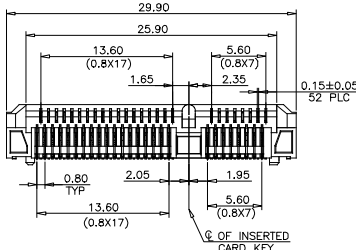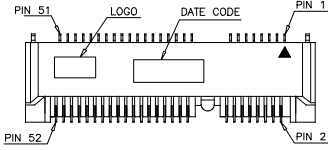

[-D-] IS THE TOP SURFACE OF PCB.
RECOMMENDED P.C.B. BOARD PATTERN LAYOUT

mat'l. code				surface	tolerance	projection	product family	
ltr	ecn	no	dr	date	tolerances unless otherwise specified	ASME Y14.5	title	
A			TAI	2013-01-03	angles X.X ± 0.30 X.XX ± 0.20 X.XXX ± 0.15	MM	0.80MM PITCH MINI PCI EXPRESS HIGH=5.6mm 52 PIN CONNECTOR	
			dr	KENNY TAI	2013-01-03	scale	dwg no	
			enr	KENNY TAI	2013-01-03		10123908	
			chr	KENNY TAI	2013-01-03		sheet 1 of 3	
			appd	PM ZHENG	2013-01-03		A4	
sheet	revision	A	A	A			type	
index	sheet	1	2	3			CUSTOMER Drawing	

form: A4mmXLC





PDS: Rev :A 3

STATUS:Released

Printed: Jan 29, 2013

NOTES:

1. MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
COVER TAPE: PET, 120°C HEAT-RESISTANT TEMPERATURE, TRANSPARENT COLOR.
CARRIER TAPE: POLYSTYRENES, 120°C HEAT-RESISTANT TEMPERATURE, TRANSPARENT COLOR.
REEL: HIPS, 70°C HEAT-RESISTANT TEMPERATURE, BLUE COLOR.
BAG: POLYETHYLENES, 100°C HEAT-RESISTANT TEMPERATURE, TRANSPARENT COLOR.
2. EACH BAG SHALL BE INCLUDED DESICCANT.
3. PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS).
4. PEELING SPEED: 300 mm/min.

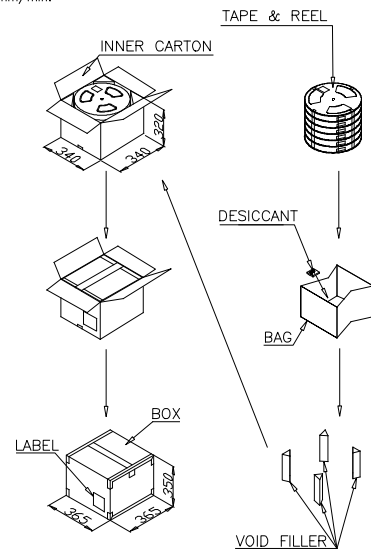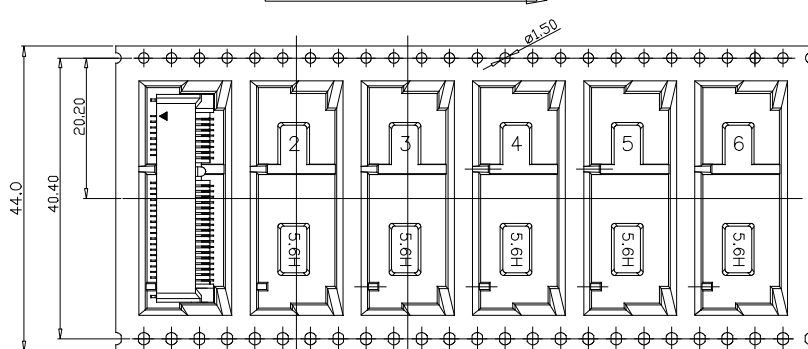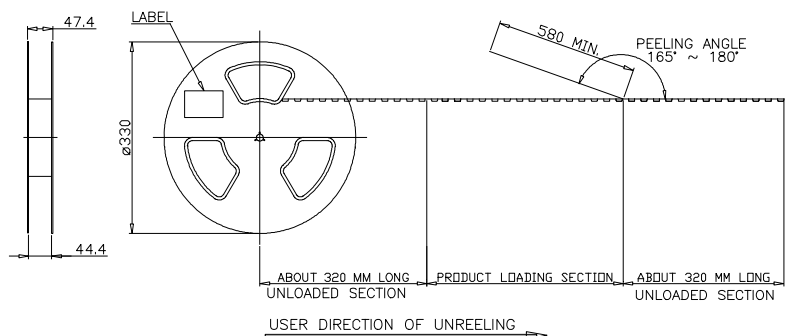




mat'l. code				surface	tolerance	projection	product family	
ltr	ecr	no	dr	date	tolerances unless otherwise specified	angle	title	
A			TAI	2013-01-03	X.X ± 0.30	MM	0.80MM PITCH MINI PCI EXPRESS HIGH=5.6mm 52 PIN CONNECTOR	
					X.XX ± 0.20			
					X.XXX ± 0.15			
			dr	KENNY TAI	2013-01-03		dwg no	sheet 2 of 3
			enr	KENNY TAI	2013-01-03		10123908	A4
			chr	KENNY TAI	2013-01-03			
			appd	PM ZHENG	2013-01-03		type	CUSTOMER Drawing
sheet index	revision sheet	A	A	A				
		1	2	3				

10123908-XXXLF					
11.96	9.86KG	4.98KG	500	6	3000
12.54	GROSS WEIGHT	NET WEIGHT	PCS/ REEL	REEL/ BOX	PCS/ BOX

PDS: Rev :A 3


STATUS:Released

Printed: Jan 29,2013

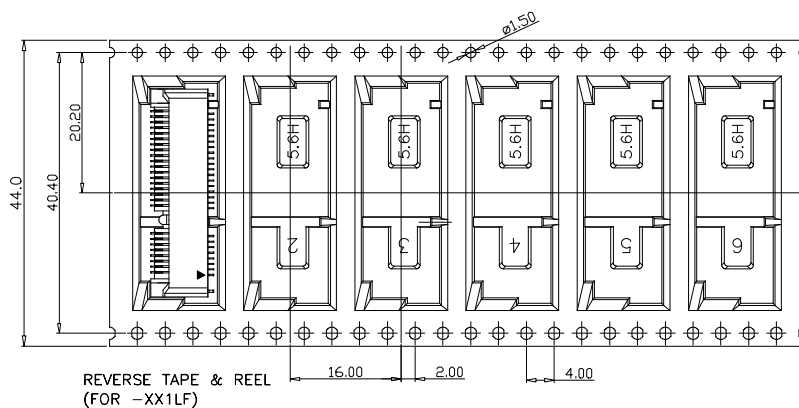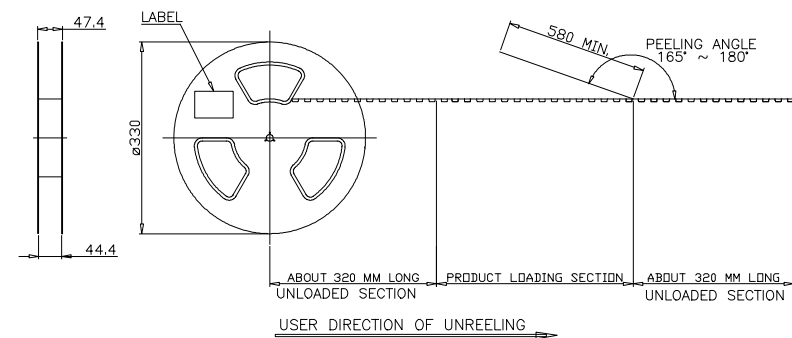

9.86KG	4.98KG	500	6	3000
GROSS WEIGHT	NET WEIGHT	PCS/ REEL	REEL/ BOX	PCS/ BOX

mat'l. code				surface  tolerance ASME Y14.5		projection 		product family			
ltr	ecn no	dr	date	tolerances unless otherwise specified				title			
A		TAI	2013-01-03	angles	$X.X \pm 0.30$			0.80MM PITCH MINI PCI EXPRESS HIGH=5.6mm 52 PIN CONNECTOR			
				in line	$X.XX \pm 0.20$						
				$X^{\circ}4'$	$X.XXX \pm 0.15$	scale					
		dr	KENNY TAI	2013-01-03			dwg no		sheet 3 of 3		size
		engr	KENNY TAI	2013-01-03			10123908		A4		
		chr	KENNY TAI	2013-01-03							
		appd	PM ZHENG	2013-01-03							
sheet index	revision sheet	A	A	1	2	3					

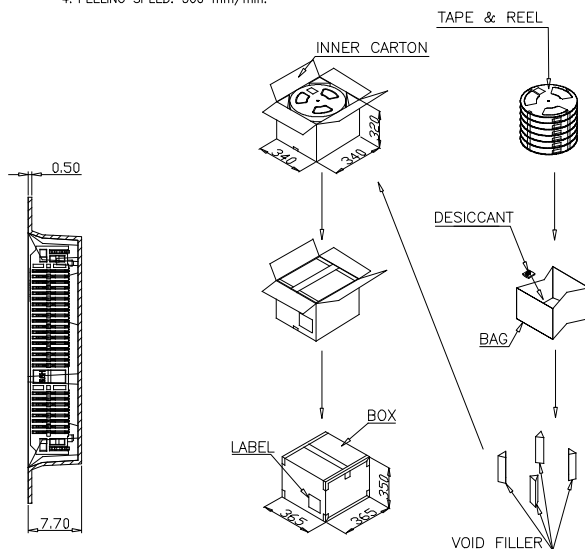

NOTES:

1. MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
COVER TAPE: PET, 120°C HEAT-RESISTANT TEMPERATURE, TRANSPARENT COLOR.
CARRIER TAPE: POLYSTYRENE, 120°C HEAT-RESISTANT TEMPERATURE, TRANSPARENT COLOR.
REEL HIPS, 70°C HEAT-RESISTANT TEMPERATURE, BLUE COLOR.
BAG: POLYETHYLENE, 100°C HEAT-RESISTANT TEMPERATURE, TRANSPARENT COLOR.
2. EACH BAG SHALL BE INCLUDED DESICCANT.
3. PEELING STRENGTH: $0.1 \sim 1.3 \text{ N}$ ($10 \sim 130 \text{ GRAMS}$).
4. PEELING SPEED: 300 mm/min.