

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[10115184-N0200YYLF](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

FCI Product number	length(L)	tolerance
10115184-N0200YYLF	2M	±20mm
10115184-N1000YYLF	10M	±2%L

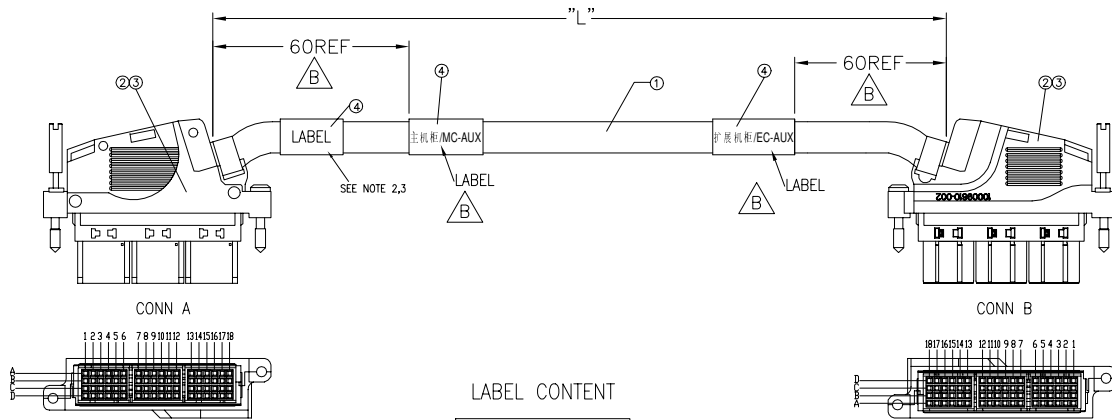

LABEL CONTENT



YY IS YEAR, WW IS WEEK

ITEM	DESCRIPTION	Q'TY	UNIT
④	label, w=25mm ref	3	EA
③	copper foil	AR	M
②	72Pin Connector,	2	EA
①	raw cable, 36pair, 26AWG solid tinned copper, PVC jacket (black color), 100±15 Ohms, -30°C~+75°C, Rated Voltage 80V, with shielding	A/R	M

rev	ecn no	dr	date
A		Tommy	2/20'12
B	ECN-BLX-N-01267-1	Tommy	8/21'12

www.fciconnect.com		surface	tolerance std	projection	mm
		-	-	⊕	↔
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	Tommy Lin	2/20'2012	ANGULAR	0.X	±-
Eng	Tommy Lin	2/20'2012	LINEAR	0.XX	±-
Chr	Roger Cheng	2/20'2012	0° ±-	0.XXX	±-
Appr	Jackson Wang	2/20'2012	Product family		C&A
FCI		72Pin sofix receptacle to 72Pin sofix receptacle cable assembly		10115184	Rev. B
catalog no		CUSTOMER		sheet 1 of 3	

MD F - 2006-06-17

1

2

3

PDS: Rev :B

STATUS: Released

Printed: Aug 28, 2012

WIRE DIAGRAM

CONN A	CONN B	CABLE PAIR
A1	A1	1
B1	B1	2
A2	A2	3
B2	B2	4
A3	A5	5
B3	B5	6
A4	A6	7
B4	B6	8
A5	A9	9
B5	B9	10
A6	A10	11
B6	B10	12
C1	C1	13
D1	D1	14
C2	C2	15
D2	D2	16
C3	C5	17
D3	D5	18
C4	C6	19
D4	D6	20
C5	C9	21
D5	D9	22
C6	C10	23
D6	D10	24
SHELL	SHELL	BRAID

CONN A	CONN B	CABLE PAIR
A7	A13	13
B7	B13	14
A8	A14	15
B8	B14	16
A9	A3	17
B9	B3	18
A10	A4	19
B10	B4	20
A11	A7	21
B11	B7	22
A12	A8	23
B12	B8	24
C7	C13	25
D7	D13	26
C8	C14	27
D8	D14	28
C9	C3	29
D9	D3	30
C10	C4	31
D10	D4	32
C11	C7	33
D11	D7	34
C12	C8	35
D12	D8	36
SHELL	SHELL	BRAID

CONN A	CONN B	CABLE PAIR
A13	A11	25
B13	B11	26
A14	A12	27
B14	B12	28
A15	A15	29
B15	B15	30
A16	A16	31
B16	B16	32
A17	A17	33
B17	B17	34
A18	A18	35
B18	B18	36
C13	C11	37
D13	D11	38
C14	C12	39
D14	D12	40
C15	C15	41
D15	D15	42
C16	C16	43
D16	D16	44
C17	C17	45
D17	D17	46
C18	C18	47
D18	D18	48
SHELL	SHELL	BRAID

www.fciconnect.com		surface	tolerance std	projection	mm
		-	-	-	-
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr Tommy Lin	2/20/2012	ANGULAR	0.X	±	Scale
Eng Tommy Lin	2/20/2012	LINEAR	0.XX	±	NTS
Chr Roger Cheng	2/20/2012	0° ±	0.XXX	±	ECN
Appr Jackson Wang	2/20/2012	Product family	C&A	Spec ref	-
FCI		72Pin sofex receptacle to 72Pin sofex receptacle cable assembly		10115184	Rev. B
catalog no		CUSTOMER		sheet 2 of 3	

W01 F - 2006-06-12

1

2

3

PDS: Rev :B

STATUS:Released

Printed: Aug 28, 2012

NOTES:

1. MATES WITH HEADER FCI PART NUMBER:10022805-X01LF
2. UNLESS OTHERWISE SPECIFIED ,LABEL POSITION SHALL BE APPROXIMATELY 15MM FROM REAR OF CONNECTOR
3. UNLESS OTHERWISE SPECIFIED ,LABEL CONTENT SHALL CONTAINS THE BELOW:
 - 
 - FCI P/N
 - YYWW
4. ALL CABLE ASSEMBLIES SHALL BE TESTED 100% FOR CONTINUITY AS DEFINED IN WIRING LIST
5. UNLESS OTHERWISE SPECIFIED ALL CABLE ASSEMBLIES SHALL BE 100% HI-POT TESTED BY APPLYING DC 300V FOR MINIMUM OF 0.01S,CONTACTION RESISTANCE 5 Ohm,INSULATION RESISTANCE 20 M Ohm. UNLESS ACTIVE COMPONENTS ARE USED IN THIS ASSEMBLY.
6. OTHER TESTING PERFORMED AS REQUIRED BY PRODUCT SPECIFICATION
7. LEAD FREE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS AS DESCRIBED IN GS-47-0004
8. CONNECTOR ASSEMBLIES SHOWN ARE FOR REFERENCE ONLY AND MAY NOT SHOW ALL PART DETAIL. REFERENCE CONNECTOR ASSEMBLY DRAWING FOR COMPLETE DETAILS.
9. GLOBAL STANDARDS FOR CABLE PACKAGING: GS-14-1093.
10. THIS DIMENSION IS A FINISHED PRODUCT LENGTH

www.fciconnect.com		surface —	tolerance std —	projection 	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	Tommy Lin	2/20/2012	ANGULAR	0.X	±
Eng	Tommy Lin	2/20/2012	LINEAR	0.XX	±
Chr	Roger Cheng	2/20/2012	0° ±	0.XXX	±
Appr	Jackson Wang	2/20/2012	Product family	C&A	Spec ref
		72Pin sofix receptacle to 72Pin sofix receptacle cable assembly		10115184	Rev. B
catalog no		—		CUSTOMER	sheet 3 of 3

MS F - 2006-06-17

1

2

3

PDS: Rev :B

STATUS:Released

Printed: Aug 28, 2012