

## Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)  
[88961-101LF](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

PRODUCT NR.	DIM "A"
88961-X01	5.00 REF.
88961-X11	3.35 REF.
88961-X20	5.76 REF.
88961-X01LF	5.00 REF.
88961-X11LF	3.35 REF.
88961-X20LF	5.76 REF.

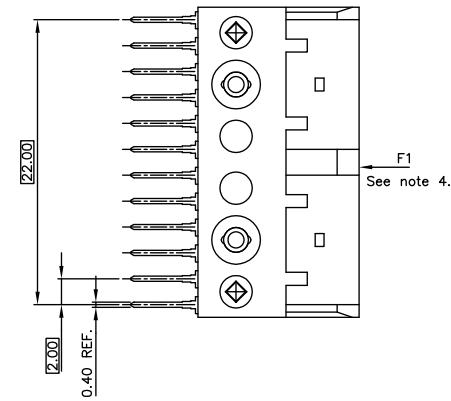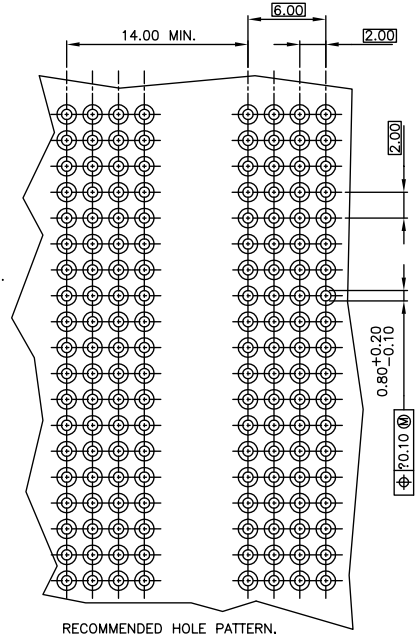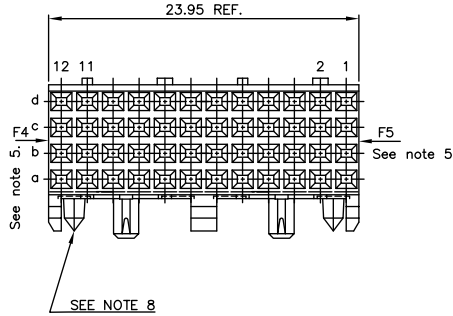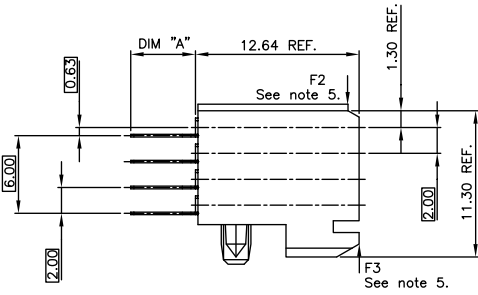

**NOTES:**

1. BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-VO
2. TERMINAL MATERIAL: PHOSPHOR BRONZE.
3. PLATING SOLDER TAILS 2-8 μmSnPb 90-97 OR PURE Sn FOR LF.
4. LOAD IN THIS DIRECTION ( E.G. THROUGH CODING) 30 NEWTON PER 12 MM CONNECTOR LENGTH.
5. LOAD IN THIS DIRECTION 25 NEWTON MAXIMUM PER CONNECTOR.
6. TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD, THE USE OF A FIXTURE IS RECOMMENDED.
7. PRODUCT MARKING: PARTNUMBER & BATCH I.D.
8. DIAMOND MARKING PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
9. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008 .
10. THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

mat'l code		tolerances unless otherwise specified		CUSTOMER COPY	FCI ELECTRONICS	
ltr	ecm no	dr	date	projection	title	www.falconconnect.com
H	0007-070	Pen	05/22/07			
J	0006-071	TR	15/26/08			
K	0006-0060	Pen	06/06/08	angles		
-	-	-	-	dr	H.Bowling	03/02/19
E	H90430	008	08/07/22	ENIG	H.Bowling	03/17/22
F	101450	008	09/08/27	thr	d.Winjes	03/02/19
G	0006-0060	CU	05/11/15	APP	H.Bowling	03/02/19
sheet	revision	K		mm	product fami	METRAL (tm)
index	sheet	1	1	scale	size	dwg no
				5:1	A2	88961
						code
						213
						sheet
						1 of 1

PDM: Rev:K

STATUS: Released

Printed: May 19, 2011