

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[FCI](#)
[HM2R30PA5108N9STLF](#)

For any questions, you can email us directly:
sales@integrated-circuit.com


Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

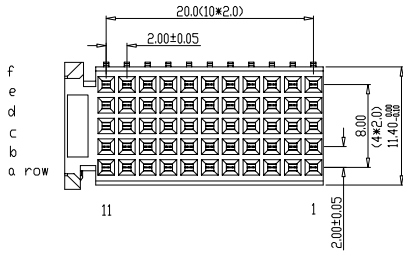

LAY-OUT
P.C.B.- HOLE



PERFORMANCE CHARACTERISTICS

- CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10¹¹ MΩ MIN

- NOTES 1. LEAD FREE INDICATOR *LF=LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC 201844.003)

- THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BSA-201572.001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

Material		Spec ref		tolerance	projection	MM
Mat code				±0.05	±0.10	
Heatreat				±0.05	±0.10	
Plating/Finish				±0.05	±0.10	
Dr	M.Fret	07-02-01	Product family	MILLIPACS	size	A4
Eng			Model Name		Scale	2.000
Chr			Model Revision		REL Level	
Appr						
FCI		title		drawing no		Rev.
Pro/E file		catalog no		CUSTOMER DRAWING		D
		HM2R30PA5108----		BSC201444050		
				sheet 1 of 1		