

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[FCI](#)
[HM2R30PA510FN9LF](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Tous droits strictement réservés. Reproduction ou utilisation sans autorisation écrite ou préalable. Propriété de c FCI. Droits de reproduction FCI.





All rights strictly reserved. Reproduction or issue to third parties in any form without the prior written authority from the proprietor. Property of FCI. Copyright FCI.



PERFORMANCE CHARACTERISTICS

- CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10⁴ MΩ MIN

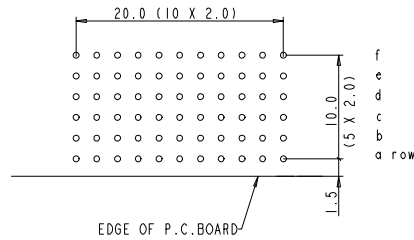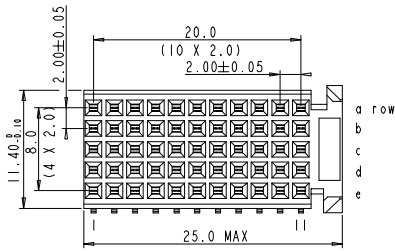

LAY-OUT
P.C.B. - HOLE

EDGE OF P.C. BOARD

- NOTES 1. " " LEAD FREE INDICATOR : LF=LEAD FREE
- " " PERFORMANCE LEVEL INDICATOR (REF DWG NO. BSC : 201844.003)
2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ech no	dr	date
A	CONVERSION	KN	14-09-01
B	REVISION 02	Wason	02-08-05
C	DG10-0110	NZ	2010.9.3
-	-	-	-
-	-	-	-
-	-	-	-

Material		Spec ref	
Mat code		tolerance	projection
Heat treat		100C ± 0.2 100C	⊕
Plating/Finish		200C ± 0.1 200C	MM
Dr	M.Fret	17-02-00	size A4
Eng			Scale 2.000
Chr			Product family MILLIPACS
Appr			Model Name
			Model Revision
			ECN
			REL Level
FCI		title	MPACS 5+2R RA RCP
		conn type	CONN TYPE C
Pre/E file	catalog no	HM2R30PA510F---	Rev. C
		customer drawing	BSC201444047
		sheet 1 of 1	