

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)

[10087121-704LF](#)

For any questions, you can email us directly:



sales@integrated-circuit.com

PRODUCT NUMBER
10087121-7XXLF

PLATING
0.05µm Au FULL PLATED
OVER 1.27µm Ni MIN



INDICATES THE PRODUCT IS RoHS
COMPATIBLE, SEE NOTE 5

PIN STYLE	SIZE
06	2x3
08	2x4
10	2x5
14	2x7
16	2x8
18	2x9
20	2x10
26	2x13
30	2x15
34	2x17
40	2x20
44	2x22
50	2x25
60	2x30
64	2x32

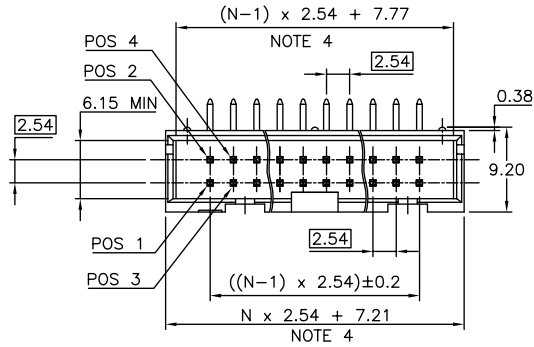

NOTES:

- 1 - HOUSING MAT'L : GLASS FILLED THERMOPLASTIC. UL94V-0 COLOR: BLUE
- 2 - PIN MATERIAL : BRASS
- 3 - PRODUCT PACKAGED IN TUBES.
- 4 - TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS N x 2.54 = 20.32mm
- 5 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a - PLATING:
- "LF" MEANS THE PRODUCT IS LEAD-FREE,
2µm MINIMUM MATTE TIN OVER 1.27µm
MINIMUM NICKEL UNDERPLATE.
 - b - MANUFACTURING PROCESS COMPATIBILITY
- THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C ±5°C SOLDER BATH TEMPERATURE FOR
5 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - c - LABELLING:
- MEETS PACKAGING SPECS AS PER GS-14-920
 - d - LEGAL STATEMENT: SEE GS-47-0004

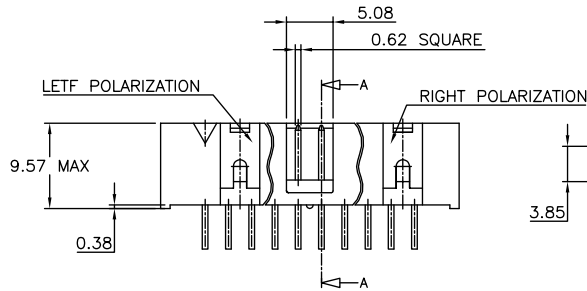

mat'l. code	surface ISO 1302	tolerance ISO 446 ISO 1101	projection	product family QUICKIE
lfr ecn no dr date	tolerances unless otherwise specified	linear .X ±0.3	mm	title QKIE SSLIM HDR
A F08-0148 LMU 08.03.27	angles	.XX ±0.13	scale 2.5:1	RA 0.05µm AU
B B-19070 LMU 14.10.15	dr J.COMPAGNON 08.03.07	.XXX ±0.05	FCI	dwg no sheet 1 of 1 size
C B-19564 BVE 14.12.01	engr L.MULIN 08.03.07			10087121 A3
	chr			type CUSTOMER Drawing
	app L.MULIN 08.03.07			
sheet index	revision sheet			