

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[FCI](#)

[10106126-A004001LF](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

PART NUMBER 10106126-A004001LF

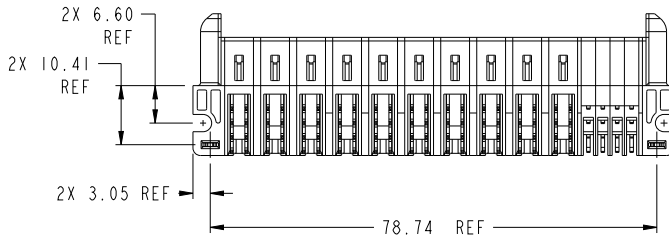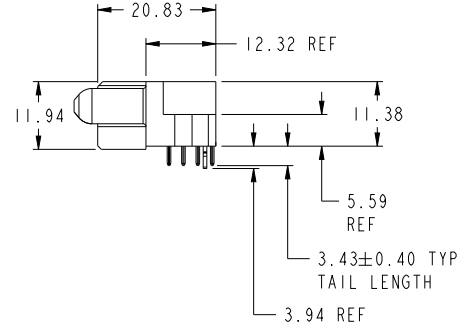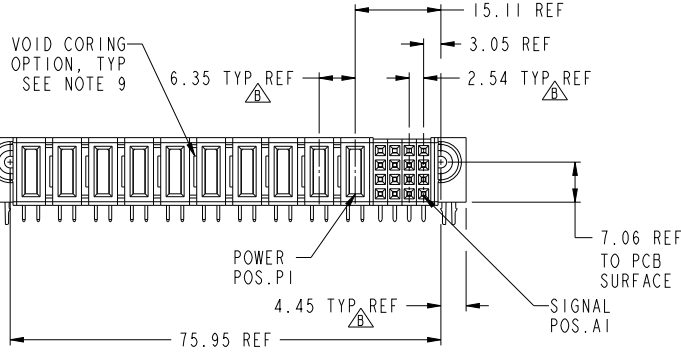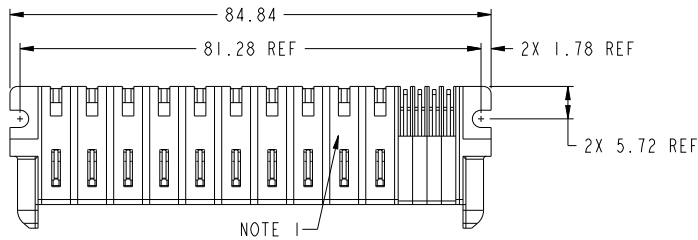

spec ref	*	dr	Heiko Zhang	20120205	projection	MM	size	A3	scale	3:2
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Peng-Bing Fu	20121014			ecn no	Released		
surface	linear	0.X	±0.50	www.fci.com			cat. no.	Product - Customer Drw	sheet 1 of 3	
		0.XX	±0.25	www.fci.com			cat. no.	Product - Customer Drw	sheet 1 of 3	
	angular	0°	±2°							

Prod File - REV C - 2009-04-09

1

2

3

PDS: Rev B


STATUS: Released

Printed: Nov 16, 2012

Copyright FCI.



PRODUCT NUMBER	ROWS	HIGH POWER										SIGNAL			CODE	DESCRIPTION				
		P10	P9	P8	P7	P6	P5	P4	P3	P2	P1	4	3	2			1	H	SA	SB
10106126-A004001LF	D C B A														H	SA	SB	SC	SD	HA

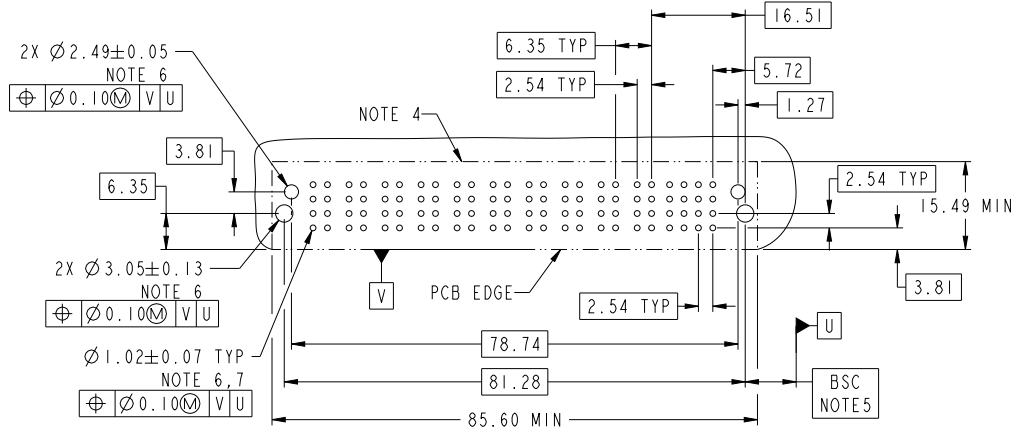





spec ref	*	dr	Hebin Zhang	20120205	projection	MM	size	A3	scale	3:2		
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Peng-Bing Fu	20121014			ecn no	ELX-00-01944-1	rel level	Released		
surface	linear	0.X	±0.50	chr			Tian-Xu Huang	20121115		<b>16S + 10HP</b> RA SOLDER RECEPTACLE	eng no 10106126-A004001	rev B
		0.XX	±0.25	appr			Pai-Ming Zhang	20121115				
	angular	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 2 of 3				



Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN. PART LENGTH UNDER 30MM SHOW DATE CODE ONLY.
- 2) MATERIALS:  
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.  
-SIGNAL CONTACT - COPPER ALLOY.  
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7)  $1.15 \pm 0.025$ MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A  $1.02 \pm 0.07$ MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658. APPLICATION SPECIFICATION REFER TO FCI GS-20-141. PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.
- 10) A  SYMBOL WILL BE NEXT TO ANY DIMENSION,VIEW,OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

spec ref	*	dr	Heiko Zhang	20120205	projection	MM	size	A3	scale	3:2
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Peng-Bing Fu	20121014			ecn no	ELX-00-01944-1	rel level	Released
		chr	Tian-Xu Huang	20121115						
		appr	Pai-Ming Zhang	20121115						
surface	linear	0.X	$\pm 0.50$		title	16S + 10HP	eng no	10106126-A004001	rev	B
		0.XX	$\pm 0.25$							
		0.XXX	$\pm 0.10$							
	angular	0°	$\pm 2^\circ$	www.fci.com	cat. no.	-	Product - Customer	Drw	sheet 3 of 3	

Prod File - REV C - 2009-04-09

1

2

3

PDS: Rev:B

STATUS:Released

Printed: Nov 16, 2012



Copyright FCI.