

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:






[FCI](#)

[10106268-0534001LF](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)


PRODUCT NUMBER SEE SHEET 2

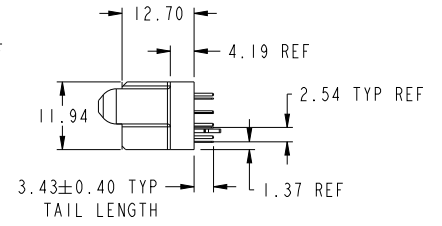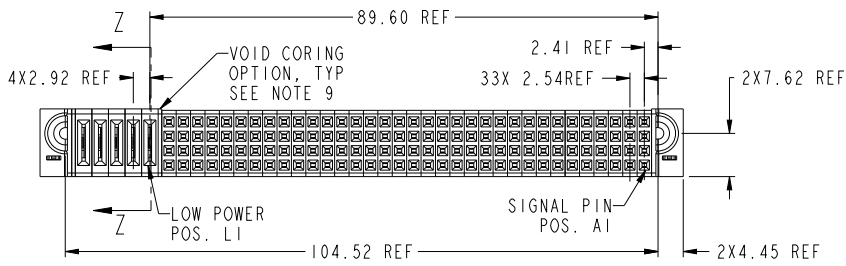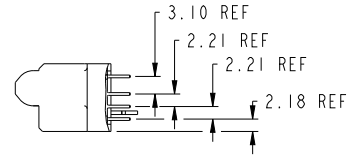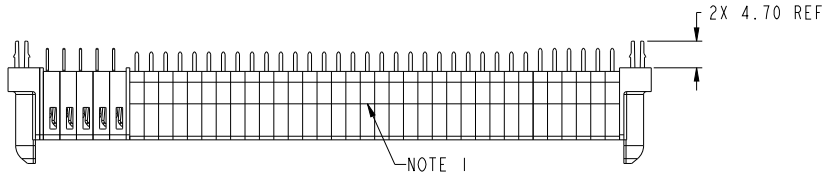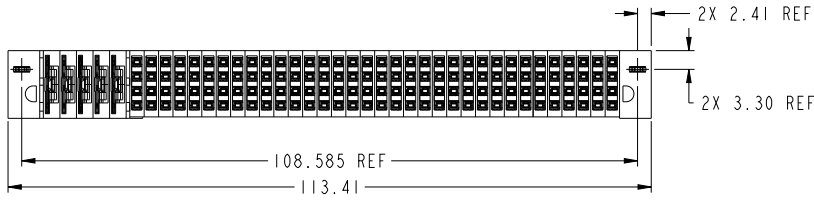

Copyright FCI.

spec ref	dr Eddy Zeng	20131010	projection	MM	size A3	scale 3:2
tolerance std ASME Y14.5	eng Xia Bob	20131015			ecn no	rel level
TOLERANCES UNLESS OTHERWISE SPECIFIED	chr Li-Hu	20131015				
surface	appr Pui-Ming Zhang	20131015			10106268-0534001	rev A
ASME Y14.5	linear	0.X ±0.50	title 136S + 5LP VT STB RECEPTACLE		Product - Customer Drw	sheet 1 of 3
		0.XX ±0.25	cat. no.			
		0.XXX ±0.10	PDS: Rev A		STATUS: Released	Printed: Nov 15, 2013
	angular	0° ±2°				

PRODUCT NO.	ROWS	LOW POWER	SIGNAL	CODE	DESCRIPTION
10106268-0534001LF	D C B A	E1	P5 P4 P3 P2 P1	E	STD SIGNAL CONTACT
			34 33 32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1	HA	METAL HOLD DOWN
				LR	STD LOW POWER CONTACT (3.43)

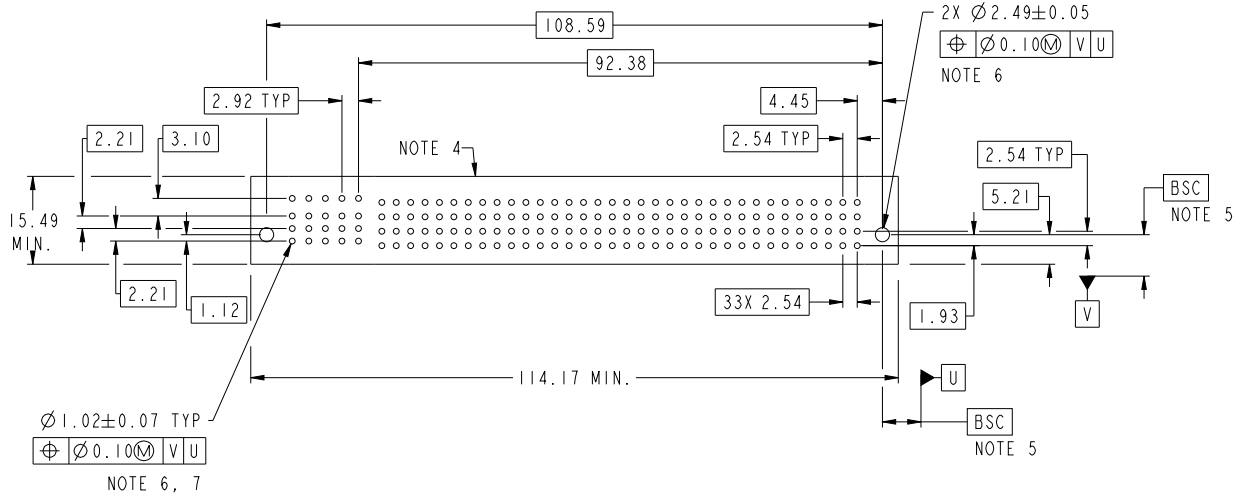




dr	Eddy Zeng	20131115	projection	MM	size	A3	scale	3:2
eng	Xia Bob	20131115			ecn no	-	rel level	Released
chr	Li-Hu	20131115			product family	PowerBlade+		
appr	Pai-Ming Zhang	20131115			title	136S + 5LP		rev
www.fci.com			cat. no.		Product - Customer Drw		sheet 2 of 3	



Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.  
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:  
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.  
-SIGNAL CONTACT - COPPER ALLOY.  
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7)  $1.15 \pm 0.025$ MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn  
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A  $1.02 \pm 0.07$ MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.  
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.  
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL  
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE  
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE  
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

dr	Eddy Zeng	20131115	projection	MM	size	A3	scale	1:1
eng	Xia Bob	20131115			ecn no			
chr	Li-Hu	20131115			rel level			
appr	Pai-Ming Zhang	20131115	product family	PowerBlade+				Released
		title 136S + 5LP VT STB RECEPTACLE	cat. no. 10106268-0534001	Product - Customer Drw	sheet 3 of 3	rev A		



Copyright FCI.