

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)

[ATT-0292-05-HEX-02](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:

1.0 SPECIFICATIONS:

- 1.1 FREQ. RANGE: DC to 8.0 GHz
- 1.2 ATTENUATION ACCURACY:
 - 0dB +0.3dB
 - 1 to 6dB ±0.3dB
 - 7 to 20dB ±0.5dB
 - 21 to 30dB ±1.0dB
 - 40, 50 & 60dB ±1.0dB

- 1.3 MAXIMUM VSWR:
 - 0 to 30dB: 1.07 + .015f(GHz)
 - 31 to 60dB: 1.25:1


- 1.4 MAXIMUM INPUT POWER:
 - 2 WATTS AVG AT +25°C DERATED LINEARLY TO 0.5 WATTS AT +125°C.
- 1.5 OPERATING TEMP. RANGE: -65°C to +125°C

2.0 MARKING

- 2.1 MARK UNIT AS SHOWN
 REF: INK-06322-27-XX)

- △ EPOXY SEAL FEMALE END ONLY FOR 1-30dB.
 EPOXY SEAL MALE & FEMALE ENDS FOR 31-60dB.
 PER EPX-08000-44-01

- 4.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

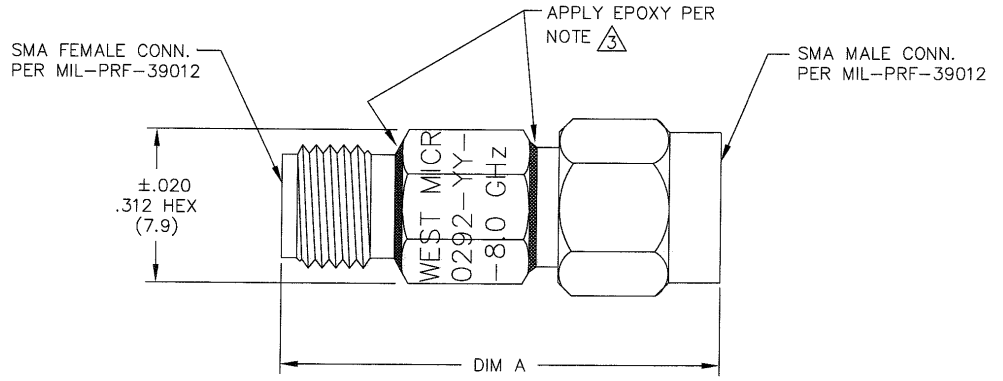

31 - 60dB	1.25 (31.8)
13 - 30dB	1.02 (25.9)
0 - 12dB	.86 (21.8)
ATTENUATION VALUE	DIM A

REV.	DESCRIPTION	DATE
-	RELEASED	9/15/92
A	ECR 2943	6-21-94
B	ECR 3979	10-30-95
C	ECR 4083	12-6-95
D	ECR 4684	7-17-96
E	ECR 6239	10-27-98
F	ECR 6545	7-10-99
G	REDRAW ON CAD	8/19/92
H	ECN 16216	9/16/97
HI	ADDED TITLEBLOCK	3/24/05
J	ECN 20772	3/26/06

DWG NO. WAS: 04243-01-00

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'	PSCM NO. 34078	MIDWEST MICROWAVE
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave	
TITLE ATTENUATOR		DRAWING NUMBER ATT-0292-XX-HEX-02
DRAWN/DATE M.HOLLMAN 8/20/92	ENG/DATE G.KOZAK 9/15/92	SCALE: 5=1
CHECKED/DATE A.BEATTY 9/15/92	APPROVED/DATE	SHEET 1 of 1