



Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[ATT-0313-10-BNC-10](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

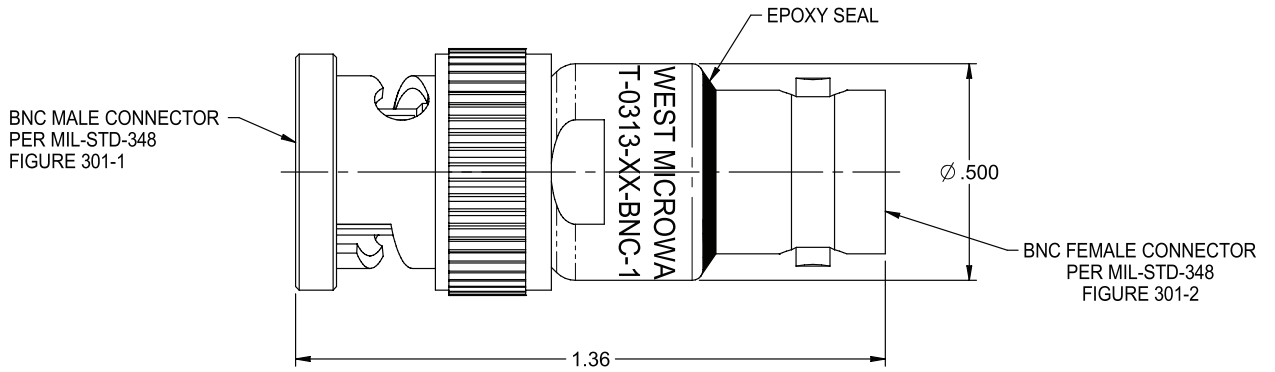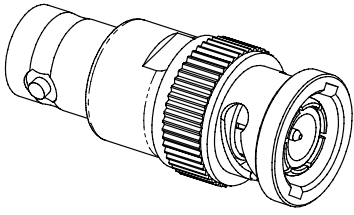

NOTES: UNLESS OTHERWISE SPECIFIED.

1. SPECIFICATIONS:
 - 1.1 FREQUENCY RANGE: DC TO 4.0 GHz
 - 1.2 ATTENUATION & ACCURACY:
 - 0 dB: +0.3/-0 dB
 - 1-6 dB: ±0.3 dB
 - 7-20 dB: ±0.5 dB
 - 21-30 dB: ±0.8 dB
 - 1.3 IMPEDANCE: 50 OHM
 - 1.4 VSWR (MAX): 1.25:1
 - 1.5 MAXIMUM INPUT POWER: 2 WATTS AVG. AT 25°C
DERATED LINEARLY TO 0.5 WATTS AT 125°C
 - 1.6 OPERATING TEMP. RANGE: -55°C TO 125°C
 - 1.7 FINISH: NICKEL PLATED BRASS.

		Midwest Microwave	
	RoHS <input checked="" type="checkbox"/> 2002/95/EC	Title: BNC ATTENUATOR, 0-30 dB	
<small>THIS PROPRIETARY DOCUMENT IS THE PROPERTY OF CINCH CONNECTIVITY SOLUTIONS. IT IS CONFIDENTIAL IN NATURE, NON-TRANSFERABLE, AND SHOULD BE KEPT UNDER STRICT CONTROL. PERMISSION IS GRANTED TO VIEW THIS DOCUMENT UPON DEMAND.</small>	<small>UNLESS OTHERWISE SPECIFIED UNITS: INCH</small> .XX ±.02 .XXX ±.005 ANGLES ±2°	Model No. ATT-0313-XX-BNC-10	
<small>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009</small>	Size A	DO NOT SCALE DRAWING	Date: 5/8/2013 Sheet 1 of 1