

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[DCB-3510-FF-SMA-02](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:


- 1.1 FREQUENCY RANGE: 250 MHz to 18.5 GHz
- 1.2 IMPEDANCE: 50 OHMS, NOM.
- 1.3 VSWR: 1.35:1 MAX.
- 1.4 INSERTION LOSS: 0.5dB MAX.
- 1.5 INSERTION LOSS AT 1 KHz: > 60dB
- 1.6 DC WORKING VOLTAGE: 200 VOLTS, MIN.
- 1.7 OPERATING TEMPERATURE: -65°C to +125°C
- 1.8 TYPE: INNER ONLY

2.0 MARKING: MARK UNIT AS SHOWN

(REF.: INK-04702-27-03)

3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

SMA FEMALE CONN.
PER MIL-PRF-39012

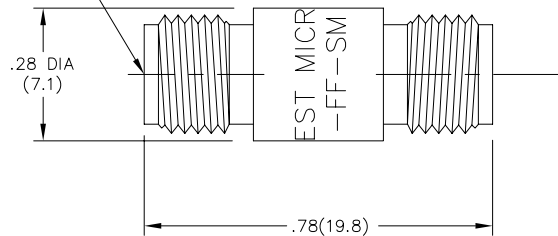

DWG NO. WAS: 03973-01-00

MODEL NUMBER
DCB-3510-FF-SMA-02
REV.
D1

REV.	DESCRIPTION	DATE
-	RELEASED	3/5/92
A	ECR 2201	5/23/93
B	ECR 6545	7/10/93
C	ECN 12424	2/11/93
D	ECN 12489	3/16/93
D1	ADDED TITLEBLOCK	5/25/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		PDCW NO. 34078		MIDWEST MICROWAVE	
3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. FLATNESS: T.I.R. CONCENTRICITY: T.I.R. ANGLES AND PERPENDICULARITY:		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE DC BLOCK	
DRAWN/DATE A.BEATTY 2/12/93		ENG./DATE G.KOZAK 2/18/93		DRAWING NUMBER DCB-3510-FF-SMA-02	
CHECKED/DATE M.HOLLMAN 2/17/93		APPROVED/DATE		SCALE: 5=1 SHEET 1 of 1	