

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[TRM-2050-FF-BNC-10](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:


1.0 SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 500 MHz
 1.2 MAXIMUM INPUT POWER:
 +25°C 2 WATTS
 +125°C 0.5 WATTS
 1.3 OPERATING TEMPERATURE RANGE:
 -55°C to +125°C
 1.4 MAXIMUM VSWR: 1.25:1
 1.5 IMPEDANCE: 50 OHMS

2.0 MARKING

- 2.1 MARK UNIT AS SHOWN
 (REF.: INK-02641-27-01)

- 3.0 DIMENSIONS IN PARENTHESIS ARE
 IN MILLIMETERS.

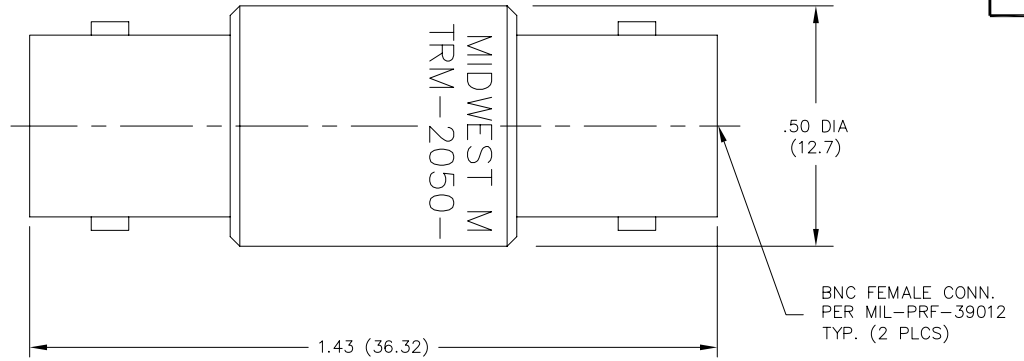

REV.	DESCRIPTION	DATE
1	RELEASED	7/25/01
1	ADDED TITLEBLOCK	10/26/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		PSOM NO.	34078	MIDWEST MICROWAVE	
3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION	
PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°		DRAWN/DATE S.ORLOV 7/24/01	ENG./DATE G.KOZAK 7/25/01	DRAWING NUMBER TRM-2050-FF-BNC-10	
		CHECKED/DATE	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1