

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Z-Hook](#)  
[P25BLK](#)

For any questions, you can email us directly:



[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

NOTES: UNLESS OTHERWISE SPECIFIED

- CONSTRUCTION:  
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.  
AVAILABLE IN TEN COLORS.  
CONTACT BLADE: BERYLLIUM COPPER, GOLD PLATED  
PER MIL-G-45204 B TYPE 1  
0.00001" [0.000254] THK MINIMUM.  
SPRING: STAINLESS STEEL TYPE 302.

- PERFORMANCE  
MAXIMUM CURRENT: 1.0 AMPS  
MAXIMUM VOLTAGE: 600 W.V.D.C.  
MAXIMUM TEMPERATURE: 200°F (93°C)

- FEATURES:  
HOOK FITS COMPONENTS UP TO  $\phi 0.025$ " [0.64].  
PIN PERMITS CONNECTION TO 0.025" [0.64] SQ.  
OR  $\phi 0.030$ " [0.76] SOCKETS.

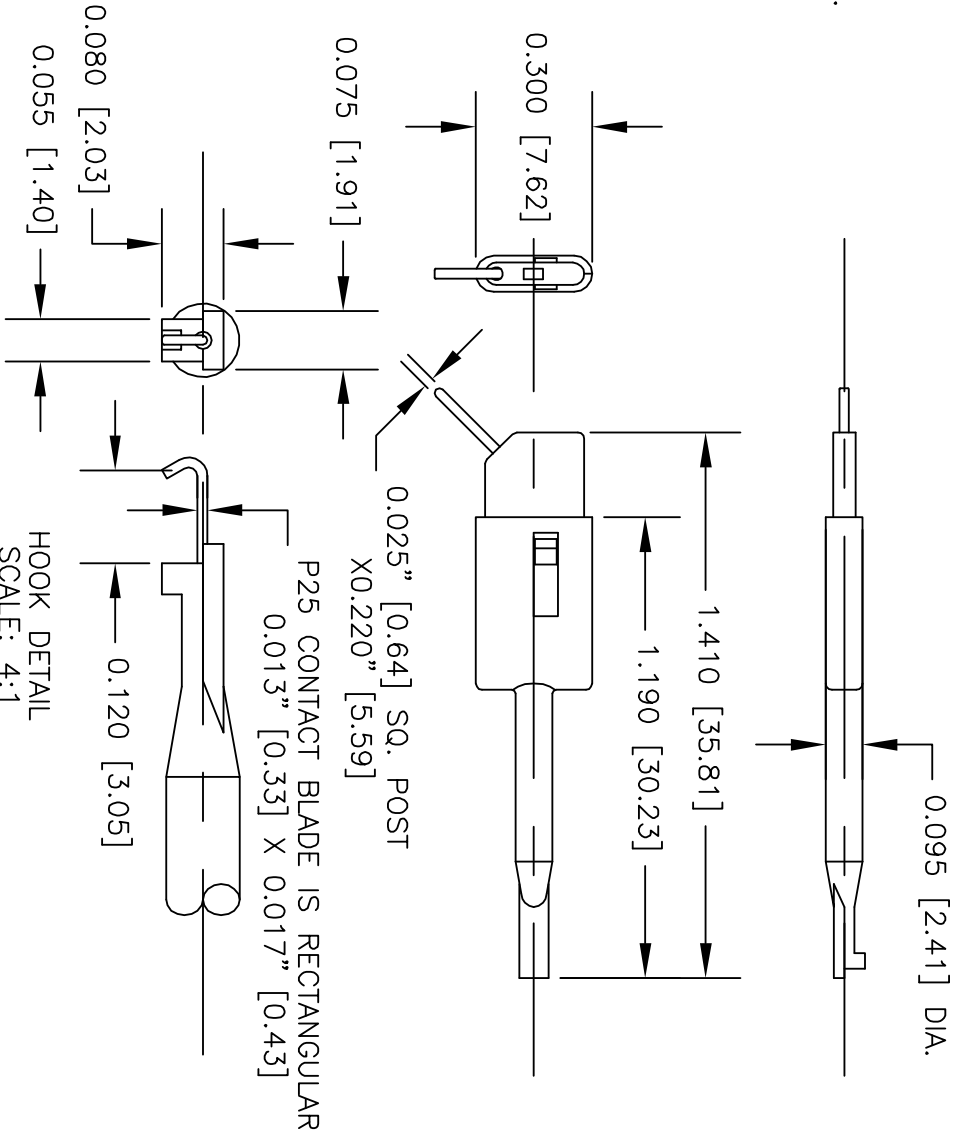

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES  
TOLERANCES ARE:  
FRACTIONS DECIMALS ANGLES  
± .XX ± ±  
± .XXX ± ±

MATERIAL  
SEE NOTE.

FINISH  
SEE NOTE.

DO NOT SCALE DRAWING

CONTRACT NO.

APPROVALS DATE

DRAWN R.L. 6/09

APPROVED BY

LTR	DESCRIPTION	REVISIONS	DATE	APPROVED

**E-Z-HOOK** DIVISION OF TEKTEST INC.  
ARCADIA, CA 91006 U.S.A.

DESCRIPTION  
PICO HOOK WITH 0.25 [6.35] POST GOLD PLATED

SIZE CODE IDENT NO. DRAWING NO.  
A 08505 P25COLOR

SCALE 2:1 SHEET 1 OF 1