

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Tallysman Wireless Inc.](#)
[33-4721-00-3000](#)

For any questions, you can email us directly:
sales@integrated-circuit.com



When precision matters.™



A Tallysman Accutenna® TW4721 Wideband Dual Feed GPS/GLONASS/BeiDou/Galileo Antenna

The TW4721 is a compact, wideband *Accutenna* technology GNSS antenna from Tallysman that provides accurate reception for all upper L- band GPS, GLONASS, Beidou, and Galileo signals (L1, G1, B1, B1 BOC, B1-2, E1) and associated augmentation signals (WAAS, EGNOS and MSAS SBAS).

The TW4721 features a novel 25mm dual feed wideband patch element that, in sharp contrast with its competitors, provides a truly circularly polarized response, with a typical axial ratio of less than 2dB over the full bandwidth. This provides a more linear carrier phase response and substantially improved multipath rejection for higher precision applications.

The TW4721 is the smallest, lightest, wideband GNSS antenna available. It is housing in a compact IP67 magnetic or adhesive mount enclosure and is available with a wide range of connector options and custom coax cable lengths.

The antenna can be ordered without the magnet. In such cases, the magnet is replaced with a plastic plug to provide a smooth under surface, with the option of ordering it with or without 1.1 mm doublesided VHB tape on the bottom.

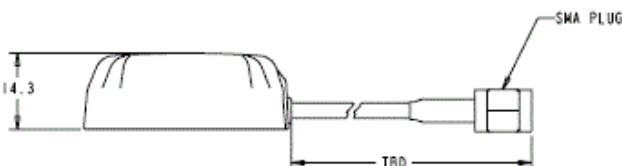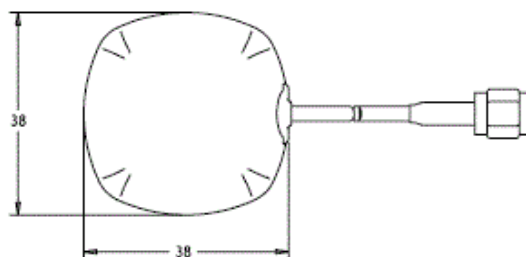

Applications

- Cost Sensitive Mission Critical Positioning
- UAV / UAS
- Covert surveillance
- Fleet Management & Asset Tracking

Features

- Dual feed patch element
- 40% wider bandwidth, small footprint
- Axial ratio: 2 dB typ.
- Low noise LNA: 1 dB
- High rejection mid-section SAW filter
- High gain: 26 dB typ.
- Wide voltage input range: 1.8 to 16 VDC
- IP67 weather proof housing
- Low Power: 10mA typ. over supply range.

Benefits

- Greatly enhanced multipath rejection
- improved GNSS reliability
- Excellent signal to noise ratio
- RoHS compliant
- Ideal for harsh environments
- Excellent out of band signal rejection



When precision matters™

TW4721 Wideband Dual Feed GPS/GLONASS/BeiDou/Galileo Antenna

Specifications At; Vcc = 3V, over full bandwidth, T=25°C

Antenna

Architecture	Wideband Dual Feed Patch Element
2 dB radiated power bandwidth (RHCP)	47 MHz
Antenna Gain (with 100mm ground plane)	4.5 dBic @ 1582.5MHz
Axial Ratio over full bandwidth	<2dB typ. 3dB max.
Polarization	RHCP

Electrical

Architecture	Dual Feed Patch -> Hybrid->LNA stage 1 -> SAW filter-> LNA stage 2
Filtered LNA Frequency Bandwidth	1559 to 1606 MHz
Gain	26dB min, 29dB max 1559 MHz to 1606MHz
Gain flatness	+/- 2dB, 1559 MHz to 1606MHz
Out-of-Band Rejection	<1500MHz >40dB <1525MHz >45dB >1630MHz >45dB
VSWR (at LNA output)	<1.5:1
Noise Figure	1.0dB typ.
Supply Voltage Range (over coaxial cable)	+1.8VDC to 16VDC nominal (12VDC recommended maximum)
Supply Current	10mA typ.
ESD Circuit Protection	15KV air discharge

Mechanicals & Environmental

Mechanical Size	38mm x 38mm dia. x 14.3mm High
Cable	RG174
Operating Temp. Range	-40°C to +85°C
Enclosure	Radome and base: ASA plastic
Weight	50gm (Enclosure + SMA connector 34gm, cable 0.31gm/cm)
Attachment Method	Magnetic or Adhesive
Environmental	IP67, REACH and RoHS compliant
Shock	Vertical axis: 50G, other axes: 30G
Vibration	3 axis, sweep = 15 min, 10 to 200Hz sweep: 3G
Warranty	One year, parts and labour

Ordering Information

TW4721 – GPS/GLONASS/BeiDou/Galileo Antenna 33-4721-xx-yyyy
 xx = connector type
 yyyy = cable length in mm

Please refer to the Ordering Guide (<http://www.tallysman.com/wp-content/uploads/Current-Ordering-Guide.pdf>) for the current and complete list of available radomes and connectors.

Tallysman Wireless Inc

36 Steacie Drive
 Ottawa ON K2K 2A9 Canada
 Tel 613 591 3131 Fax 613 591 3121 sales@tallysman.com

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2015 Tallysman Wireless Inc. All rights reserved. Rev 1.4