## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Wurth Electronics Inc 9774015960R

For any questions, you can email us directly: <a href="mailto:sales@integrated-circuit.com">sales@integrated-circuit.com</a>



Datasheet of 9774015960R - ROUND SPACER M3.3 STEEL 1.5MM

more than you expect

### A Dimensions: [mm]












Scale - 3:1

Technical Tolerances according to DIN ISO 2768m

In tape & reel packaging a kapton-film is fixed on the top of the spacer to realize automatic assembly

### B Recommended land pattern: [mm]




Scale - 3:1

### C Stencil suggestion:

2014-08-04

DATE



# D Properties:



Properties	Value
Surface	Tin plated
Material	11SMnPb30
Internal bore diameter	3.3 mm
Tightening torque	0.5 Nm
Solder Cream Thickness	150 µm
Packaging	Reel
·	

## E General information:

In tape & reel packaging a kapton-film is fixed on the top of the spacer for automatic assembly.

During the programming of the Pick and Place machine and the AOI, please consider the flap of the kapton-film.

				Projection ————————————————————————————————————		WA CMET CMD	Staal Spagar (8 2 2 Ini	tornol	
				Würth Elektronik eiSos GmbH EMC & Inductive Solutions Max-Eyth-Str. 1	& Co. KG	non stop	Steel Spacer Ø 3.3 Int	ernai	
				74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0		Order No.	COMPLIANT ROHS&REACH WÜRTH BLEKTRONIK	SIZE	
1.0	2014-08-04	SSt	SKI	www.we-online.com		9774015960R	WORTH ELEKTRONIK	A4	


Scale - 3:1

SSt




# **Distributor of Wurth Electronics Inc: Excellent Integrated System Limited**Datasheet of 9774015960R - ROUND SPACER M3.3 STEEL 1.5MM

more than you expect

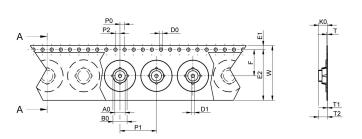


		A0	В0	w	P1	т	T1	T2	КО	D0	D1	E1	E2	F	P0	P2	Tape	packaging unit
	tolerance	typ.	typ.	±0,3	±0,1	max.	min.	ref.	typ.	+0,1	min.	±0,1	min.	±0,05	±0,1	±0,05		
	9774010960	4,50	6,20	24,00	16,00	0,60	0,10	3,05	2,75	1,50	1,50	1,75	22,25	11,50	4,00	2,00	Polystyrene	1500
١.	9774015960	4,50	6,20	24,00	16,00	0,60	0,10	3,70	3,40	1,50	1,50	1,75	22,25	11,50	4,00	2,00	Polystyrene	1200
1.0	9774020960	4,50	6,20	24,00	16,00	0,60	0,10	4,20	3,90	1,50	1,50	1,75	22,25	11,50	4,00	2,00	Polystyrene	1050
"	9774025960	4,50	6,20	24,00	16,00	0,60	0,10	4,70	4,40	1,50	1,50	1,75	22,25	11,50	4,00	2,00	Polystyrene	950
	9774030960	4,50	6,20	24,00	16,00	0,60	0,10	5,20	4,90	1,50	1,50	1,75	22,25	11,50	4,00	2,00	Polystyrene	800

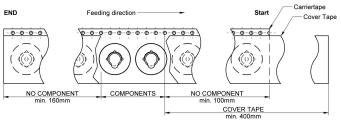

Packaging is referred to the international standard IEC 60286-3:2007





		Α	В	С	D	N	W1	W2	W3	W3
tolerance		± 2,0	min.	± 0,8	min.	± 2,0	+ 2	max.	min.	max.
Tape width	24mm	330,00	1,50	13,00	20,20	60,00	24,40	30,40	23,90	27,40



Packaging is referred to the international standard IEC 60286-3:2007					Projection ————————————————————————————————————	DESCRIPTION
165° - 180°					Würth Elektronik eiSos GmbH & EMC & Inductive Solutions	WA-SMST SMD Steel Spacer Ø 3.3 Interna
an an an an					Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0	Order No. SIZE
Pull-of force     Tape width   24 mm   0,1 N - 1,3 N	1.0	2014-08-04	SSt	SKI	www.we-online.com eiSos@we-online.com	9774015960R
Tape mail 5 mm   5,114 1,614	REV	DATE	BY	CHECKED	elous@we-utilite.com	




Datasheet of 9774015960R - ROUND SPACER M3.3 STEEL 1.5MM

more than you expect

### **H Soldering Specifications:**



### H1: Classification Reflow Profile for SMT components:

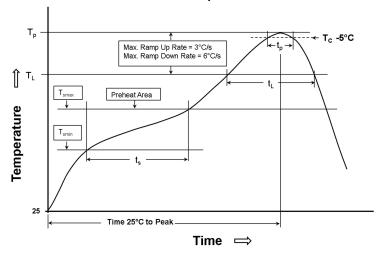

### **H2: Classification Reflow Profiles**

Profile Feature	Pb-Free Assembly
Preheat  - Temperature Min (T <sub>smin</sub> )  - Temperature Max (T <sub>smax</sub> )  - Time (t <sub>s</sub> ) from (T <sub>smin</sub> to T <sub>smax</sub> )	150°C 200°C 60-120 seconds
Ramp-up rate (T <sub>L</sub> to T <sub>P</sub> )	3°C/ second max.
Liquidous temperature ( $T_L$ ) Time ( $t_L$ ) maintained above $T_L$	217°C 60-150 seconds
Peak package body temperature (T <sub>p</sub> )	See Table H3
Time within 5°C of actual peak temperature (tp)	20-30 seconds
Ramp-down rate (T <sub>P</sub> to T <sub>L</sub> )	6°C/ second max.
Time 25°C to peak temperature	8 minutes max.

refer to IPC/JEDEC J-STD-020D

### **H3: Package Classification Reflow Temperature**

	Package Thickness	Volume mm³ <350	Volume mm <sup>3</sup> 350 - 2000	Volume mm³ >2000
PB-Free Assembly	< 1.6 mm	260°C	260°C	260°C
PB-Free Assembly	1.6 - 2.5 mm	260°C	250°C	245°C
PB-Free Assembly	≥ 2.5 mm	250°C	245°C	245°C

refer to IPC/JEDEC J-STD-020D

				Projection		DESCRIPTION					
						WA-SMST SMD	Steel Spacer Ø 3.3 Int	ternal			
				Würth Elektronik eiSos GmbH 8 EMC & Inductive Solutions	& Co. KG	non stop					
				Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0		Order No.	COMPLIANT ROHS&REACH WORTH ELEKTRONIK	SIZE			
1.0	2014-08-04	SSt	SKI	www.we-online.com eiSos@we-online.com		9774015960R	WONTH ELEKTRONIK	A4			
REV	DATE	BY	CHECKED	CIOGOSTIC GIIIIC.COIII							

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use.

Moreoner Wilton Electronic eSics Smith & Co KG products are neither designed nor intended for use in a reason such as millarlay, averageae, acidation, unless of the product is reasonable upperbation signal, disaster prevention, medical, public information network etc.. With Electronic eSics Gmith & Co KG must be informed about the intent of such usage before the design-in-state in a chaffion sufficient entities for its effect in a chaffin sufficient entities in a chaffin sufficient indicates in a chaffin sufficient entities in a chaffin sufficient indicates in a chaffin sufficient in a chaffin sufficient in a chaffin sufficient in a chaffin sufficient in a chaffin suffi



Datasheet of 9774015960R - ROUND SPACER M3.3 STEEL 1.5MM

more than you expect

### **I Cautions and Warnings:**

The following conditions apply to all goods within the product series of WA-SMST of Würth Elektronik eiSos GmbH & Co. KG:

All recommendations according to the general technical specifications of the data-sheet have to be complied with.

The responsibility for the applicability of customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products do also apply for customer specific products.

### **Product Specific:**

Follow all instructions in the datasheet, especially:

- The solder profile has to be complied with according to the technical reflow soldering specification, otherwise no warranty will be sustained. Surface discoloration due to reflow processing is permitted.

  •Wave soldering is not applicable. Reflow soldering is recommended.
- All products shall be used before the end of the period of 12 months based on the product date-code, if not a 100% solderability can't be ensured.
   The maximum permissible torques must be complied with to prevent mechanical destruction of the elements and PCB.

				Projection -		DESCRIPTION  WA-SMST SMD	Steel Spacer Ø 3.3 Int	ernal			
				Würth Elektronik eiSos Gmbl EMC & Inductive Solutions	H & Co. KG	non stop					
				Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0		Order No.	COMPLIANT ROHS&REACH WÜRTH BLEKTRONIK				
1.0	2014-08-04	SSt	SKI	www.we-online.com eiSos@we-online.com		9774015960R					
REV	DATE	BY	CHECKED	elous@we-uninie.com							

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wilm Elektronic Resides Genirit & Co Kit or products are neither designed and on the control, transportation signal, disaster prevention, medical, public information network etc., Wilm Elektronic Resides Genital & Co Kit or use to effect and on the control transportation signal, disaster prevention, medical, public information network etc., Wilm Elektronic Resides Genital & Co Kit or use to effect and on the control transportation signal, disaster prevention, medical, public information network etc., Wilm Elektronic Resides Genital & Co Kit or use to effect and on the control transportation signal, disaster prevention, medical, public information network etc., Wilm Elektronic Resides Genital & Co Kit or use to effect and on the control transportation signal, disaster prevention, medical, public information network etc., Wilm Elektronic Resides of the control transportation signal, disaster prevention, medical, public information network etc., Wilm Elektronic Residence of the control transportation signal, disaster prevention, medical, public information network etc., Wilm Elektronic Residence of the control transportation signal, disaster prevention, medical, public information network etc., Wilm Elektronic Residence of the control transportation signal, disaster prevention, medical, public information network etc., Wilm Elektronic Residence of the control transportation signal, disaster prevention, medical public residence of the control transportation signal, disaster prevention, medical public residence of the control transportation of the control transportation of the control transportation





Datasheet of 9774015960R - ROUND SPACER M3.3 STEEL 1.5MM

more than you expect

### J Important Notes:

### The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

### 1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications
It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications

In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component.

Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty,

### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve spe cific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter

### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected



### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered.

The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights
All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG.

Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

				Projection		DESCRIPTION					
						WA-SMST SMD	Steel Spacer Ø 3.3 Int	ernal			
				Würth Elektronik eiSos GmbH EMC & Inductive Solutions	& Co. KG	non stop					
				Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0		Order No.	COMPLIANT ROHS&REACH				
1.0	2014-08-04	SSt	SKI	www.we-online.com eiSos@we-online.com		9774015960R					
REV	DATE	BY	CHECKED	- cious@ive-utilite.cutii							

ment has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially equipment on where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use.

roll is 65cs RiPH & Co. KG products are neither designed nor intended for use in a nease such as military, acrespace, aviation, nuclear control, submarine, braisportation injuried, insportation signal, disaster prevention, medical, public information network etc. Wifin Elektronik eScs Grinkl & Co. KG must be informed about the intent of such usage before addition, actificant feedinglish evaluation devices for stelly must be performed on every electronic component which is useful electrical circulars better every lead of eliability functions or performance.