

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Newava Technology Inc.](#)
[S34045](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

22 x 13 LM1575X, LM1577X Inductor
150 uHy 3.0 ADC

Inductor designed for use with National Semiconductor Regulators:

LM1575-XX / LM2575-XX

LM1577-XX / LM2577-XX

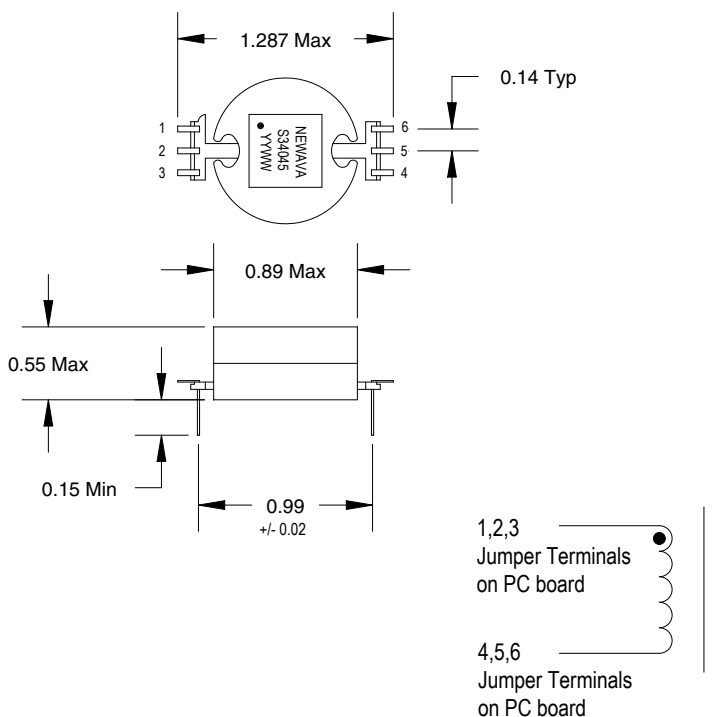

ELECTRICAL SPECS:

1: INDUCTANCE: @ 10 kHz, 0.1 Vrms
(1 thru 3 to 4 thru 6) = 135 - 165 uHy

2: DCRs:
(1 thru 3 to 4 thru 6) = 0.060 Ohms Max.

3: Temp Class - 130 C

4: HIPOT: 250 VDC
Winding to core (2 Sec., 5 mA Max)

Specifications at room temperature of 25 C.

A	2/20/03		KAM	Production Release	
REV.	DATE	ECN	BY	DESCRIPTION	
TOLERANCES ON			Newava Tech. Watertown, SD 57201 605-886-0264	150 uHy Inductor 3.0 ADC	
.XXX	.XX	ANGLE			
+ -	+ -	+ -	DATE	DRAWING NO.	REV.
DRAWN:			SCALE	MODEL	
CHECKED: -					S34045
APPROVED: -			- KAM	NEXT ASSY:	A
THIS PRINT MUST NOT BE COPIED IN WHOLE OR IN PART				OR USED DETRIMENTALLY TO OUR INTEREST	
					SHEET 1 OF 1