

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Infineon Technologies](#)
[BSO211P](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Preliminary data

BSO211P


OptiMOS®-P Small-Signal-Transistor

Feature

- Dual P-Channel
- Enhancement mode
- Super Logic Level (2.5 V rated)
- 150°C operating temperature
- Avalanche rated
- dv/dt rated

Product Summary

V_{DS}	-20	V
$R_{DS(on)}$	67	mΩ
I_D	-4.7	A

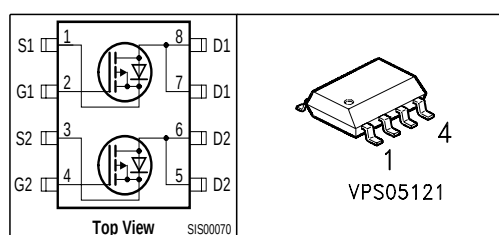

Type	Package	Ordering Code
BSO211P	SO 8	Q67042-S4064

Maximum Ratings, at $T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Continuous drain current $T_A=25\text{ °C}$ $T_A=70\text{ °C}$	I_D	-4.7 -3.8	A
Pulsed drain current $T_A=25\text{ °C}$	$I_{D\text{ puls}}$	-18.8	
Avalanche energy, single pulse $I_D=-4.7\text{ A}$, $V_{DD}=-10\text{ V}$, $R_{GS}=25\text{ Ω}$	E_{AS}	28	mJ
Reverse diode dv/dt $I_S=-4.7\text{ A}$, $V_{DS}=-16\text{ V}$, $di/dt=200\text{ A/μs}$, $T_{j\text{ max}}=150\text{ °C}$	dv/dt	-6	kV/μs
Gate source voltage	V_{GS}	±12	V
Power dissipation $T_A=25\text{ °C}$	P_{tot}	2	W
Operating and storage temperature	T_j , T_{stg}	-55... +150	°C
IEC climatic category; DIN IEC 68-1		55/150/56	



Preliminary data

BSO211P

Thermal Characteristics

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Characteristics					
Thermal resistance, junction - soldering point	R_{thJS}	-	-	50	K/W
SMD version, device on PCB:	R_{thJA}				
@ min. footprint, t<10s		-	-	110	
@ 6 cm ² cooling area ¹⁾		-	-	62.5	

Electrical Characteristics, at $T_j = 25^\circ C$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Static Characteristics					
Drain-source breakdown voltage $V_{GS}=0, I_D=-250\mu A$	$V_{(BR)DSS}$	-20	-	-	V
Gate threshold voltage, $V_{GS} = V_{DS}$ $I_D=-25\mu A$	$V_{GS(th)}$	-0.6	-0.9	-1.2	
Zero gate voltage drain current $V_{DS}=-20V, V_{GS}=0, T_j=25^{\circ}C$ $V_{DS}=-20V, V_{GS}=0, T_j=150^{\circ}C$	I_{DSS}	-	-0.1 -10	-1 -100	μA
Gate-source leakage current $V_{GS}=-12V, V_{DS}=0$	I_{GSS}	-	-10	-100	
Drain-source on-state resistance $V_{GS}=-2.5V, I_D=-3.7A$	$R_{DS(on)}$	-	86	110	m Ω
Drain-source on-state resistance $V_{GS}=-4.5V, I_D=-4.7A$	$R_{DS(on)}$	-	53	67	

¹⁾Device on 40mm*40mm*1.5mm epoxy PCB FR4 with 6cm² (one layer, 70 μm thick) copper area for drain connection. PCB is vertical without blown air; $t \leq 10$ sec.



Preliminary data

BSO211P

Electrical Characteristics, at $T_j = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Dynamic Characteristics

Transconductance	g_{fs}	$ V_{DS} \geq 2 \cdot I_D \cdot R_{DS(on)max}$ $I_D = -3.8\text{A}$	6.4	12.8	-	S
Input capacitance	C_{iss}	$V_{GS}=0, V_{DS}=-15\text{V},$ $f=1\text{MHz}$	-	690	920	pF
Output capacitance	C_{oss}		-	261	391	
Reverse transfer capacitance	C_{rss}		-	214	321	
Turn-on delay time	$t_{d(on)}$	$V_{DD}=-10\text{V}, V_{GS}=-4.5\text{V},$ $I_D=-1\text{A}, R_G=6\Omega$	-	7.8	11.7	ns
Rise time	t_r		-	10.6	16	
Turn-off delay time	$t_{d(off)}$		-	26.3	39.5	
Fall time	t_f		-	23.3	35	

Gate Charge Characteristics

Gate to source charge	Q_{gs}	$V_{DD}=-15\text{V}, I_D=-4.7\text{A}$	-	1.35	2	nC
Gate to drain charge	Q_{gd}		-	5.6	8.1	
Gate charge total	Q_g	$V_{DD}=-15\text{V}, I_D=-4.7\text{A},$ $V_{GS}=0 \text{ to } -4.5\text{V}$	-	15.9	23.9	
Gate plateau voltage	$V_{(plateau)}$	$V_{DD}=-15\text{V}, I_D=-4.7\text{A}$	-	-1.9	-	V

Reverse Diode

Inverse diode continuous forward current	I_S	$T_A=25^{\circ}\text{C}$	-	-	-2	A
Inverse diode direct current, pulsed	I_{SM}		-	-	-18.8	
Inverse diode forward voltage	V_{SD}	$V_{GS}=0, I_F = I_D $	-	-0.93	-1.4	V
Reverse recovery time	t_{rr}	$V_R=-10\text{V}, I_F = I_D ,$ $di_F/dt=100\text{A}/\mu\text{s}$	-	24.3	30.4	ns
Reverse recovery charge	Q_{rr}		-	7.6	9.5	nC




Preliminary data

BSO211P

1 Power dissipation


$$P_{\text{tot}} = f(T_A)$$

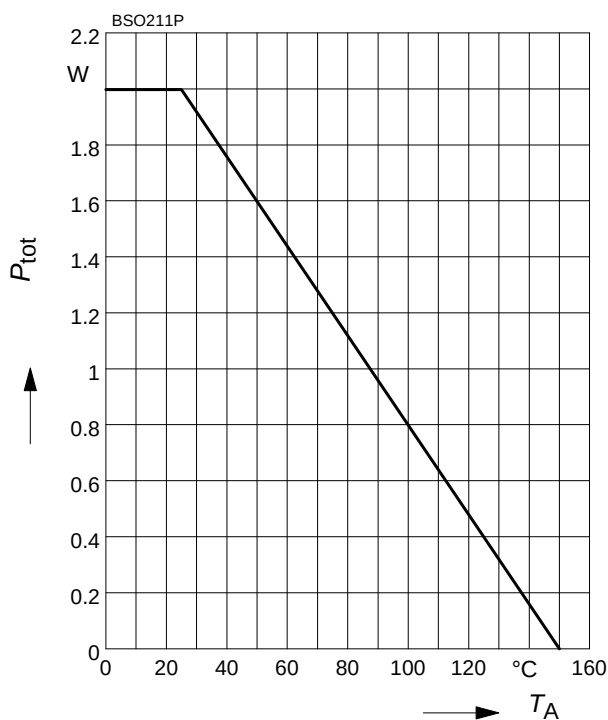

2 Drain current

$$I_D = f(T_A)$$


parameter: $|V_{GS}| \geq 4.5 \text{ V}$

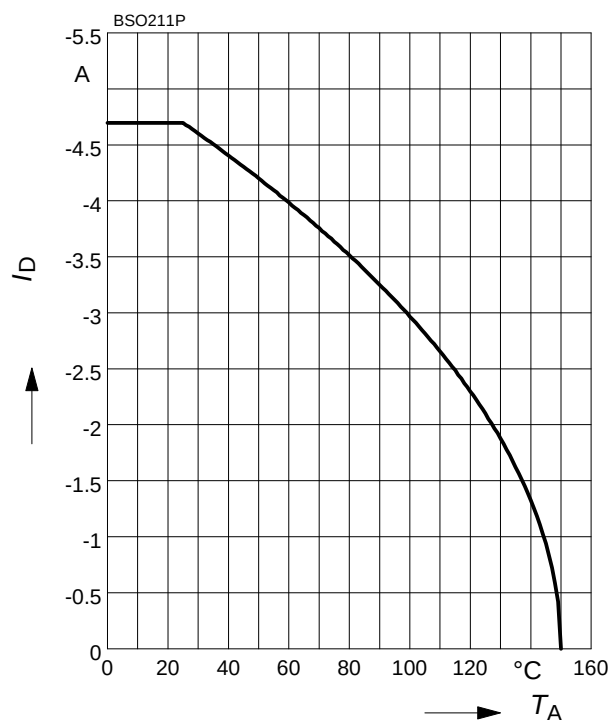

3 Safe operating area

$$I_D = f(V_{DS})$$


parameter: $D = 0$, $T_A = 25^\circ\text{C}$

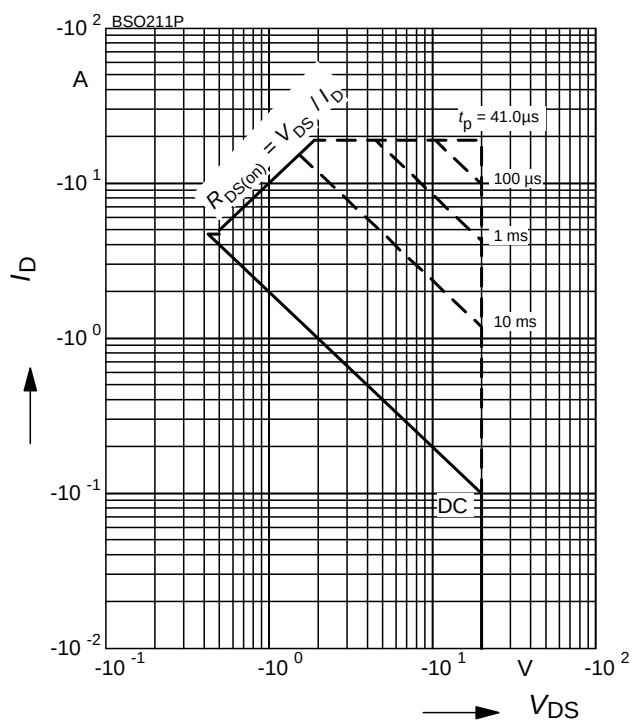

4 Transient thermal impedance

$$Z_{\text{thJS}} = f(t_p)$$

parameter: $D = t_p/T$

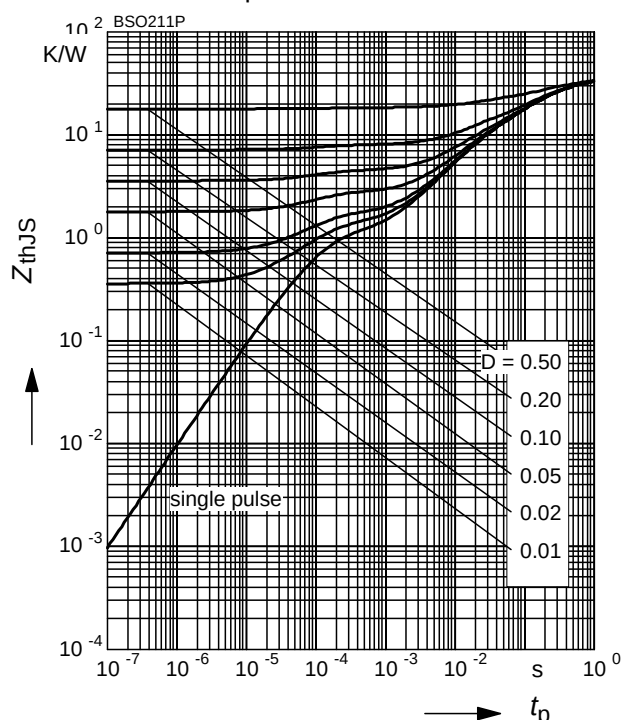




Preliminary data

BSO211P

5 Typ. output characteristic

$$I_D = f(V_{DS}); T_j = 25^\circ\text{C}$$


parameter: $t_p = 80 \mu\text{s}$

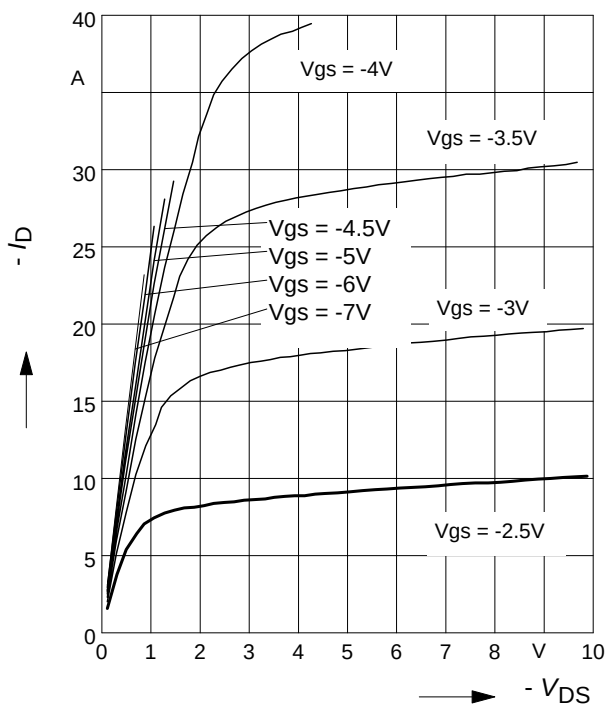

6 Typ. drain-source on resistance

$$R_{DS(on)} = f(I_D)$$


parameter: V_{GS}

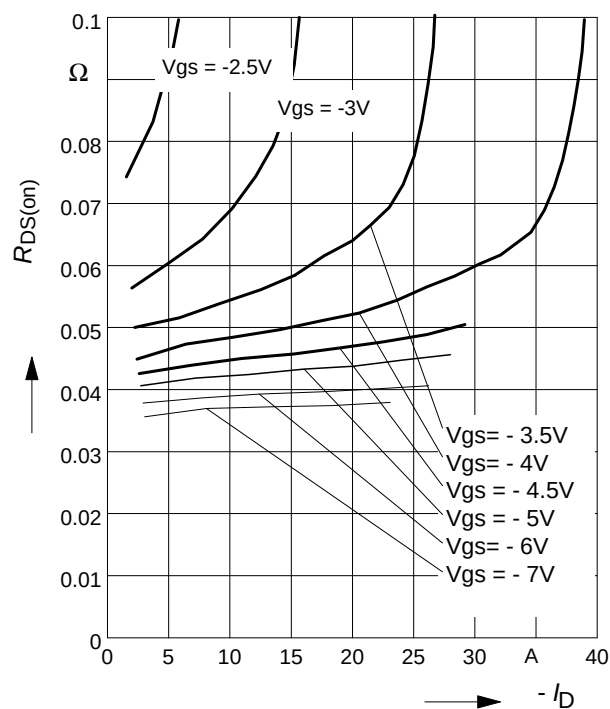

7 Typ. transfer characteristics

$$I_D = f(V_{GS}); |V_{DS}| \geq 2 \times |I_D| \times R_{DS(on)max}$$


parameter: $t_p = 80 \mu\text{s}$

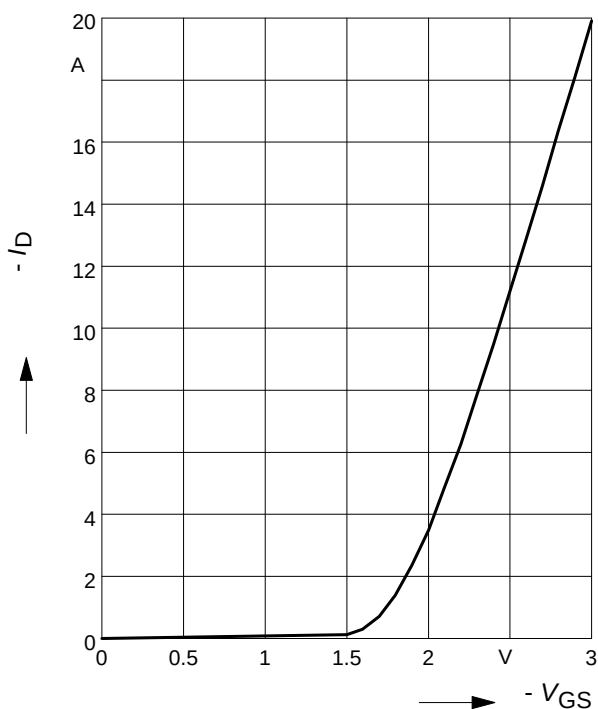

8 Typ. forward transconductance

$$g_{fs} = f(I_D); T_j = 25^\circ\text{C}$$

parameter: $t_p = 80 \mu\text{s}$

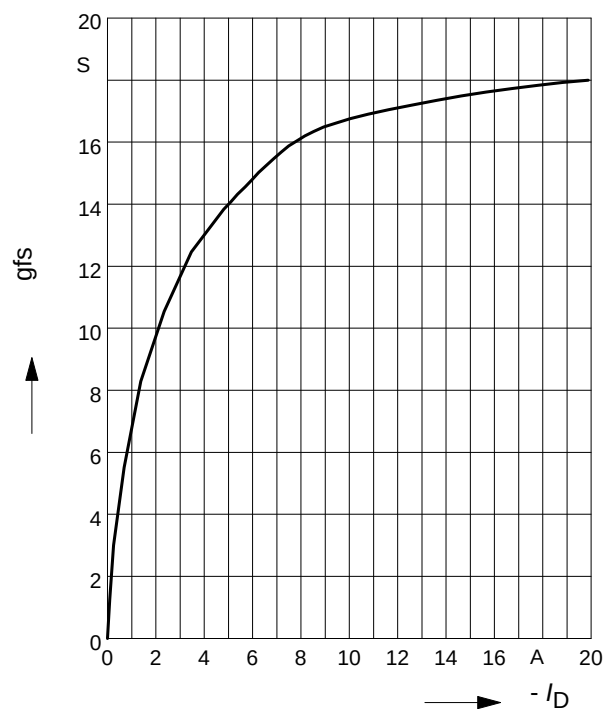




Preliminary data

BSO211P

9 Drain-source on-resistance

$$R_{DS(on)} = f(T_j)$$


parameter: $I_D = -4.7$ A, $V_{GS} = -4.5$ V

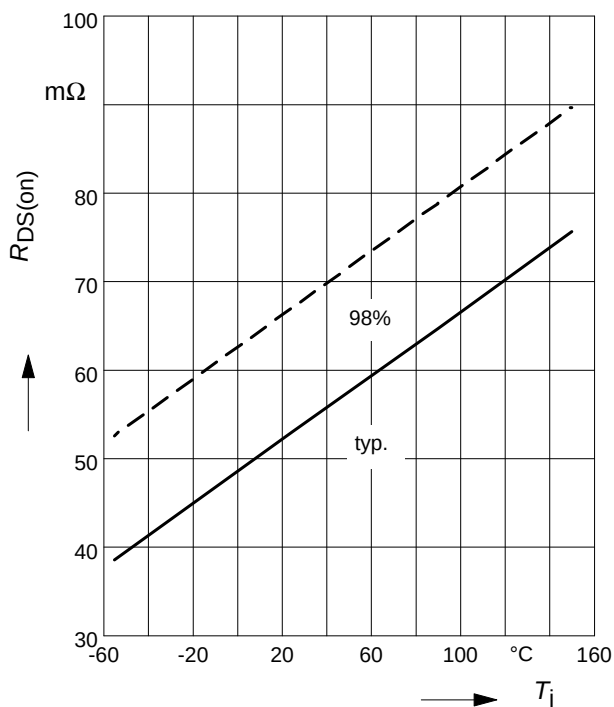

10 Typ. gate threshold voltage

$$V_{GS(th)} = f(T_j)$$


parameter: $V_{GS} = V_{DS}$

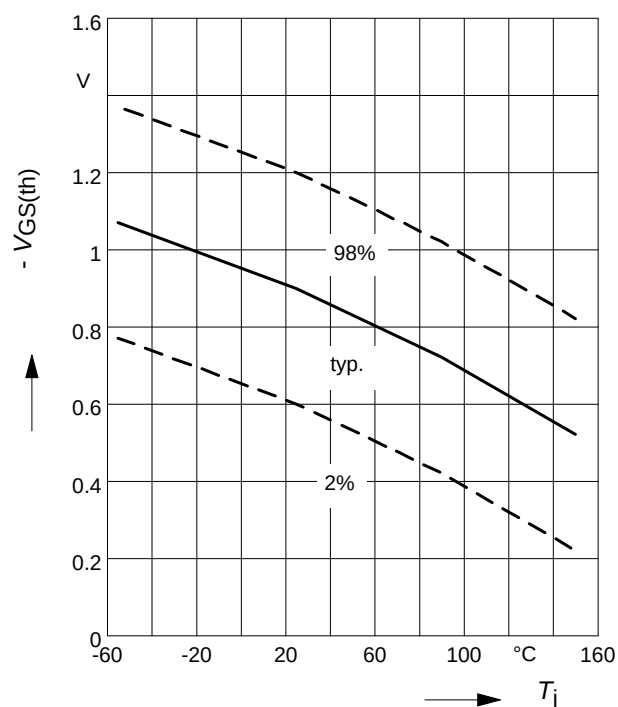

11 Typ. capacitances

$$C = f(V_{DS})$$


parameter: $V_{GS}=0$, $f=1$ MHz

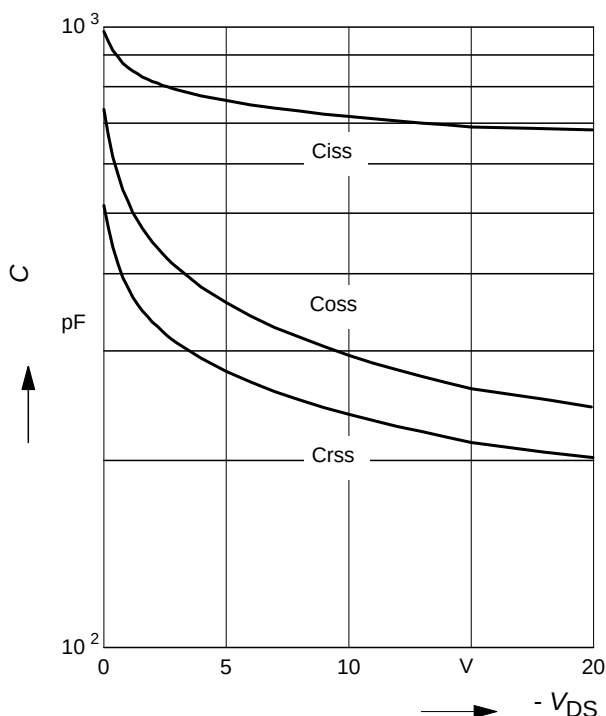

12 Forward character. of reverse diode

$$I_F = f(V_{SD})$$

parameter: T_j , $t_p = 80$ μs

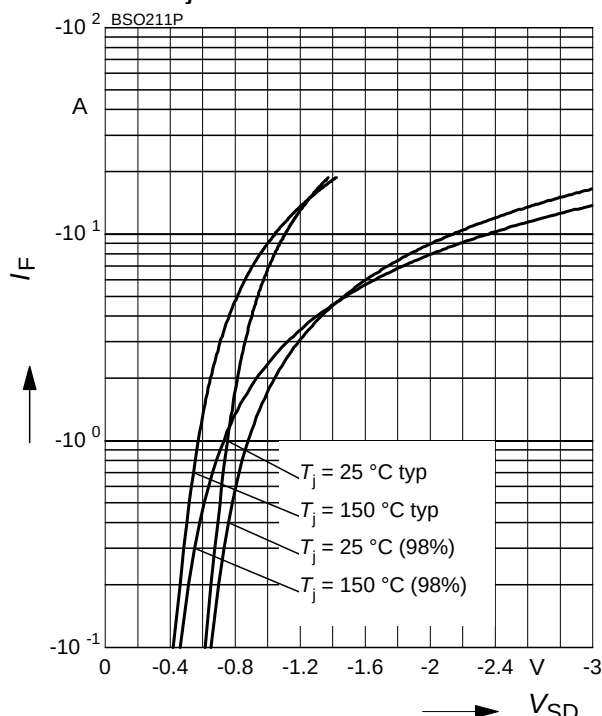




Preliminary data

BSO211P

13 Typ. avalanche energy

$$E_{AS} = f(T_j), \text{ par.: } I_D = -4.7 \text{ A}$$


$$V_{DD} = -10 \text{ V}, R_{GS} = 25 \Omega$$

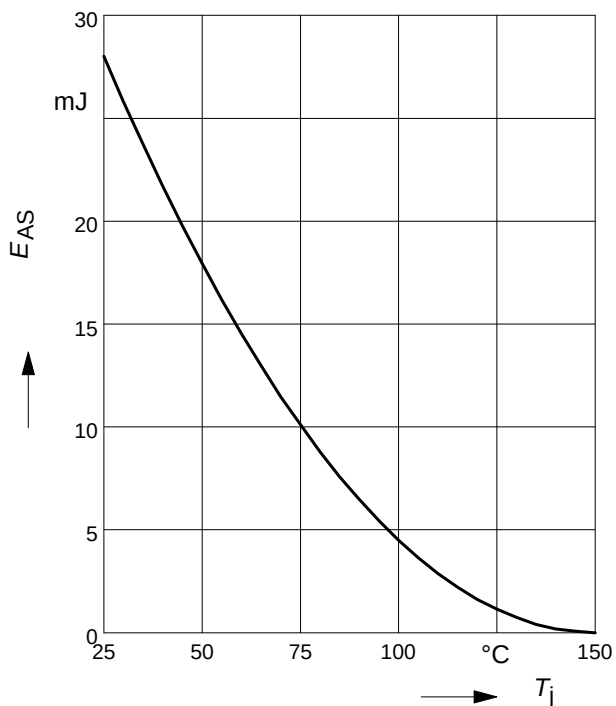

14 Typ. gate charge


$$|V_{GS}| = f(Q_{Gate})$$

$$\text{parameter: } I_D = -4.7 \text{ A pulsed}$$

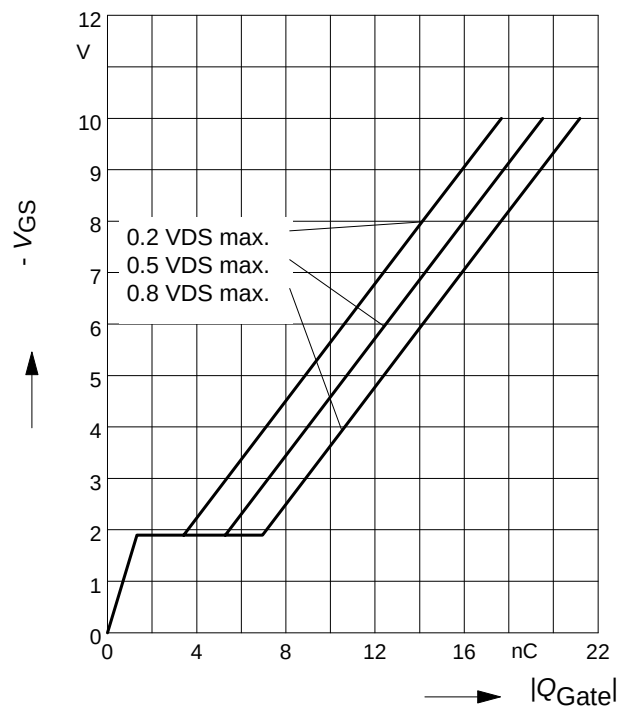

15 Drain-source breakdown voltage

$$V_{(BR)DSS} = f(T_j)$$

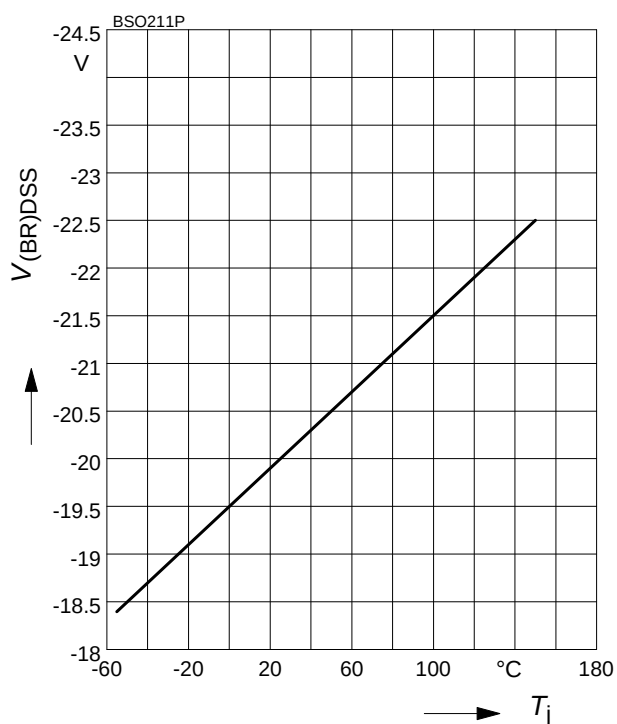



Preliminary data

BSO211P

Published by
Infineon Technologies AG,
Bereichs Kommunikation
St.-Martin-Strasse 53,
D-81541 München
© Infineon Technologies AG 1999
All Rights Reserved.

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (see address list).

Warnings

Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.