

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[TDK Corporation](#)  
[ACB1608M-040-T](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# EMC Components

# ACB Series

## Ferrite Beads SMD


### FEATURES

- The ACB series provide effective EMC suppression in signal lines through simple in-series implementation. It is thus ideal for circuits in which it is difficult to bypass high-frequency components to ground.
- Reflection components are highly suppressed through the use of a special ferrite material and an advanced internal structure that minimizes stray capacitance. This product is, therefore, an excel-

lent countermeasure for noise radiation in high-speed digital signal lines.

- The ultra-miniature 1.6 × 0.8 mm part exhibits a 600Ω impedance at 100MHz, which is the larger type 2012.
- Both the 1608 and 2012 types are available in a large number of impedance values. Different characteristics can thus be achieved without changing PC board land patterns.


### SHAPES AND DIMENSIONS/CIRCUIT DIAGRAM

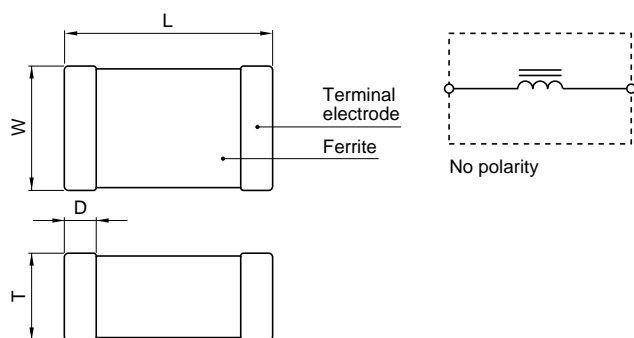

Dimensions in mm

Shape	L	W	T	D
1608	1.6±0.15	0.8+0.3, -0.1	0.8+0.3, -0.1	0.3±0.2
2012	2±0.2	1.25±0.2	0.9±0.2	0.4±0.2

### RECOMMENDED PC BOARD PATTERNS REFLOW AND FLOW SOLDERING

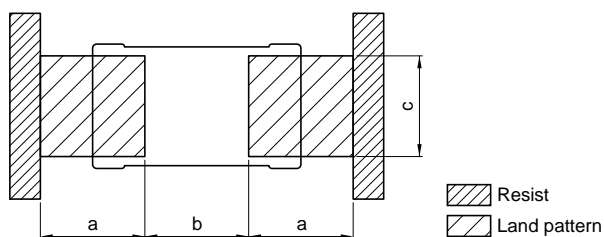


Dimensions in mm

Type	a	b	c
ACB1608	1	0.6	0.8
ACB2012	1	1	1

### ELECTRICAL CHARACTERISTICS

Part No.	Impedance (Ω) [100MHz]	DC resistance (Ω)max.	Rated current (mA)max.
ACB1608L-015-□*	15±25%	0.1	500
ACB1608L-030-□	30±25%	0.3	400
ACB1608L-060-□	60±25%	0.4	300
ACB1608L-120-□	120±25%	0.5	200
ACB1608L-300-□	300±25%	1.5	200
ACB1608M-040-□	40±25%	0.3	400
ACB1608M-080-□	80±25%	0.5	300
ACB1608M-120-□	120±25%	0.7	200
ACB1608M-300-□	300±25%	1.2	150
ACB1608M-600-□	600±25%	1.8	100
ACB1608H-015-□	15±25%	0.3	400
ACB1608H-030-□	30±25%	0.4	300
ACB1608H-060-□	60±25%	0.7	200
ACB1608H-120-□	120±25%	1.2	150
ACB1608H-300-□	300±25%	1.8	100
ACB2012L-015-□	15±25%	0.1	600
ACB2012L-030-□	30±25%	0.3	500
ACB2012L-060-□	60±25%	0.4	400
ACB2012L-120-□	120±25%	0.5	300
ACB2012L-300-□	300±25%	1	250
ACB2012L-600-□	600±25%	2	150
ACB2012M-040-□	40±25%	0.3	500
ACB2012M-080-□	80±25%	0.4	400
ACB2012M-120-□	120±25%	0.5	300
ACB2012M-300-□	300±25%	0.9	200
ACB2012M-600-□	600±25%	1.3	100
ACB2012H-015-□	15±25%	0.3	400
ACB2012H-030-□	30±25%	0.4	300
ACB2012H-060-□	60±25%	0.5	300
ACB2012H-120-□	120±25%	0.9	200
ACB2012H-300-□	300±25%	1.3	100

\* □: Packaging style (T: Taping [ø180mm reel], TL: Taping [ø330mm reel], B: Bulk)




# EMC Components

# ACB Series


Ferrite Beads  
SMD

## TYPICAL ELECTRICAL CHARACTERISTICS Z, X, R vs. FREQUENCY CHARACTERISTICS


**ACB1608L-015**




**ACB1608L-030**




**ACB1608L-060**




**ACB1608L-120**




**ACB1608L-300**




**ACB1608M-040**




**ACB1608M-080**




**ACB1608M-120**




**ACB1608M-300**




**ACB1608M-600**




**ACB1608H-015**




**ACB1608H-030**




**ACB1608H-060**




**ACB1608H-120**




**ACB1608H-300**




**ACB2012L-015**




**ACB2012L-030**




**ACB2012L-060**



**ACB2012L-120**



**ACB2012L-300**



• TEST EQUIPMENT: RF IMPEDANCE ANALYZER YHP4191A


# EMC Components

# ACB Series


Ferrite Beads  
SMD

## TYPICAL ELECTRICAL CHARACTERISTICS Z, X, R vs. FREQUENCY CHARACTERISTICS


**ACB2012L-600**




**ACB2012M-040**




**ACB2012M-080**




**ACB2012M-150**




**ACB2012M-300**




**ACB2012M-600**




**ACB2012H-015**




**ACB2012H-030**




**ACB2012H-060**



**ACB2012H-120**



**ACB2012H-300**



• TEST EQUIPMENT: RF IMPEDANCE ANALYZER YHP4191A