

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[Pomona Electronics](#)
[4995-0](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Model 4995
Binding Post, Spring
Loaded, Per MIL-P-55149/8

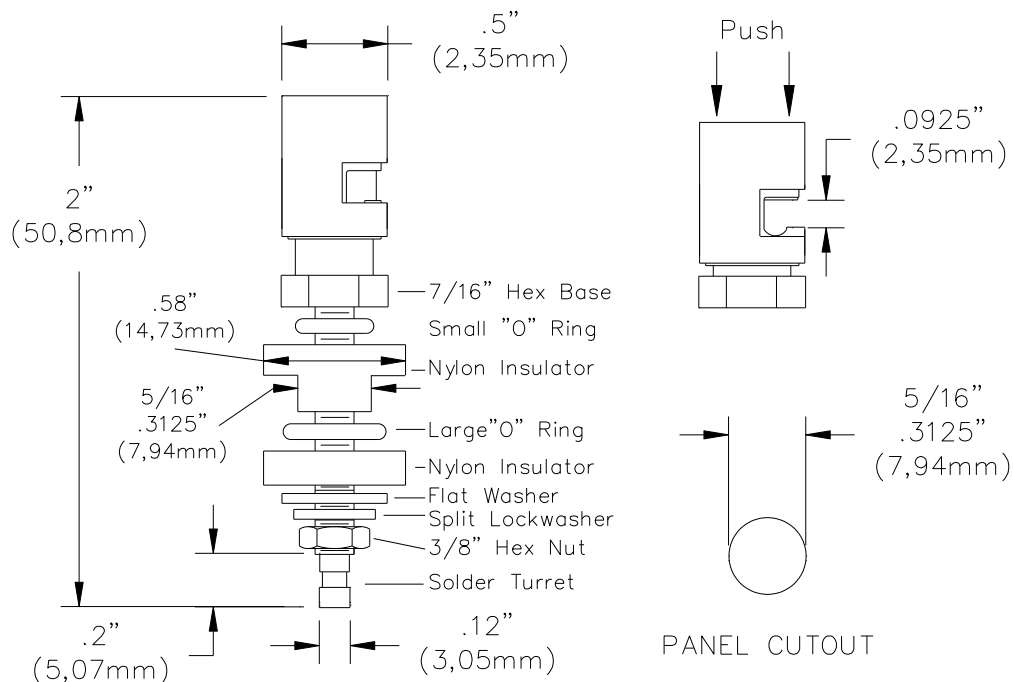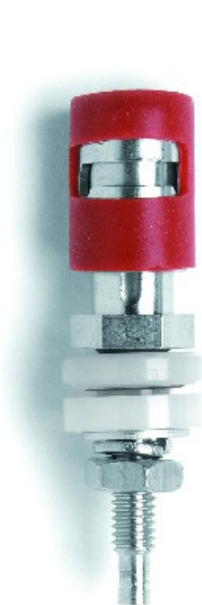

FEATURES:

- ✓ Spring-loaded cap captures wire securely for fast connection and release.
- ✓ Mounts in panels from .062" (1.57mm) to .125" (3.18mm) thick.
- ✓ Accepts wire size up to .0925" (2,35mm) diameter.
- ✓ Complies with MIL-P-55149/8.

MATERIALS:

Body: Nickel Plated Brass
 "O" Rings: Silicon Rubber
 Cap: Silicon Rubber, Red or Black over body
 Hardware: Hex Nut, Split Lockwasher, Brass Washer, Nylon Washer, "O" Rings, Body, Cap

RATINGS:

Voltage: Hands free usage in controlled voltage environments: 1200 Vrms Max. *For CE compliance: not intended for hand-held use at voltage above 33 Vrms/70 Vdc.*
 Current: 15 Amperes
 Temperature: +239°F (+115°C) Max.

ORDERING INFORMATION:

Model 4995-0 (Black)
 Model 4995-2 (Red)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies.