

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)
[OSTTD020161](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

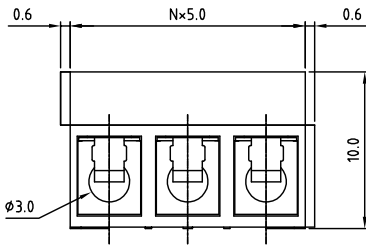

N=Number of poles



Material

- Terminal body (metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Wire guard :stainless steel
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus/CSA

- Voltage rating: 250V /250V
- Current rating: 16A /16A
- Wire range: Solid wire(AWG): 14 / 14-22
Stranded wire(AWG): 16 / 14-22
- Torque : 2.6Lb-In / 4Kgf.cm
- Screw: M2.6
- Wire strip length: 5-6mm
- Withstanding Voltage: 15KV/ 15KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:


RoHS Compliant

PART NUMBER:

OSTTDXX0161

- | | |
|--------------|--------------------|
| No. of Poles | COLOR |
| 02: 02 Poles | 0: Black |
| 03: 03 Poles | 5: Green |
| ... | 6: Blue (Standard) |
| 24 24 Poles | 8: Grey |

P.C.B LAYOUT

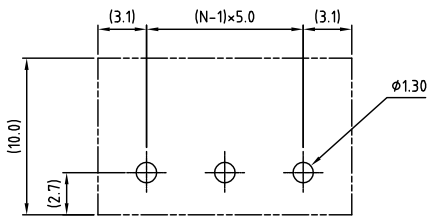

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

OST ON-SHORE TECHNOLOGY, INC.					
TITLE	OSTTD-5.0mm series 2p-24p				
PART NO.	OSTTDXX0161				
DWG NO.	OSTTDXX0161.DWG				
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
Shi Jun 2006.10.19	Marvin 2006.10.19	Marvin 2006.10.19	Marvin 2006.10.19		X: ±0.50 X.X: ±0.30 X.XX: ±0.10 X*: ±1°
SHEET: 01/01				REV: C	UNIT: mm SCALE: NONE