

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Schurter](#)
[7022.0010](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

FUSES



Non resettable fuses

A12FA 380V

6,3 × 32

Miniature Fuses Type A12FA 380V

super-quick-acting FF
high breaking capacity
Ceramic tube



Standards


none

Approvals

UL

Pre-arcing time/current characteristic (at T_a 23 °C)

| Rated current I _n | n · I _n | |
|------------------------------|----------------------|----------------------|
| | 1,5 · I _n | 2,1 · I _n |
| | min. | max. |
| 0,1 – 12,5 A | 1 h | 1 h |

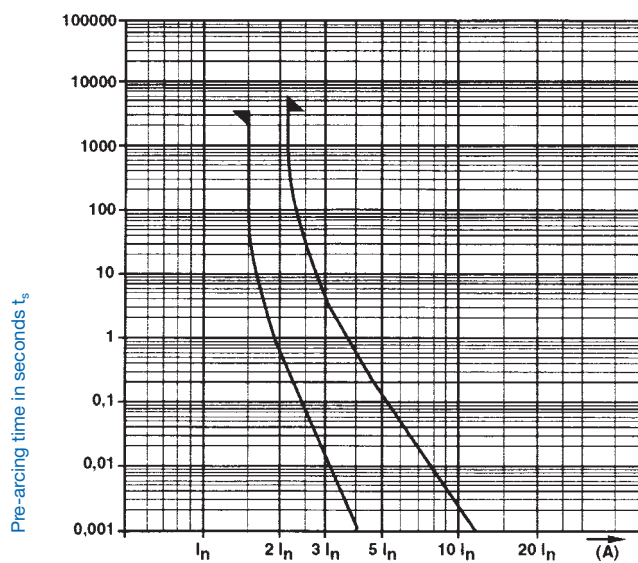

Multiple of rated current I_n

Technical data

Weight 3 g

| Order No. | Rated current I _n Rated voltage U _n | Breaking capacity | Voltage drop | | Sustained power dissipation | | Pre-arcing I ² t | | Approvals |
|-----------|--|---|-------------------|---------|-----------------------------|--------|-----------------------------|------------------------|-----------|
| | | | at I _n | max. mV | at 1,5 · I _n | max. W | at 10 · I _n | A ² s | |
| 7022.0000 | 0,100 A / 380 V | 150 kA / 380 V AC p.f. / cos φ ≥ 0,2 | | 2600 | | 1,5 | | 1,5 · 10 ⁻³ | UL |
| 7022.0010 | 0,125 A / 380 V | | | 2300 | | 1,5 | | 2,9 · 10 ⁻³ | |
| 7022.0020 | 0,160 A / 380 V | | | 1700 | | 1,4 | | 5,8 · 10 ⁻³ | |
| 7022.0030 | 0,200 A / 380 V | | | 1500 | | 1,2 | | 1,3 · 10 ⁻² | |
| 7022.0040 | 0,250 A / 380 V | | | 1500 | | 2,2 | | 1,9 · 10 ⁻² | |
| 7022.0050 | 0,315 A / 380 V | | | 2150 | | 4,1 | | 2,2 · 10 ⁻² | |
| 7022.0060 | 0,400 A / 380 V | | | 2750 | | 2,85 | | 2,3 · 10 ⁻² | |
| 7022.0070 | 0,500 A / 380 V | | | 2850 | | 3,65 | | 4,1 · 10 ⁻² | |
| 7022.0080 | 0,630 A / 380 V | | | 2000 | | 3,2 | | 1 · 10 ⁻¹ | |
| 7022.0090 | 0,800 A / 380 V | | | 2050 | | 4,15 | | 1,7 · 10 ⁻¹ | |
| 7022.0100 | 1 A / 380 V | | | 1750 | | 4,45 | | 4,4 · 10 ⁻¹ | |
| 7022.0110 | 1,25 A / 380 V | | | 740 | | 4,15 | | 2 · 10 ⁻¹ | |
| 7022.0120 | 1,60 A / 380 V | | | 570 | | 3,05 | | 5,4 · 10 ⁻¹ | |
| 7022.0130 | 2 A / 380 V | | | 615 | | 4,50 | | 8,1 · 10 ⁻¹ | |
| 7022.0140 | 2,50 A / 380 V | | | 465 | | 4,35 | | 1,8 | |
| 7022.0150 | 3,15 A / 380 V | | | 440 | | 5 | | 3,4 | |
| 7022.0160 | 4 A / 380 V | | | 335 | | 4,8 | | 8,1 | |
| 7022.0170 | 5 A / 380 V | | | 395 | | 7,7 | | 12 | |
| 7022.0180 | 6,30 A / 380 V | | | 170 | | 3 | | 6 | |
| 7022.0190 | 8 A / 380 V | | | 135 | | 3 | | 15 | |
| 7022.0200 | 10 A / 380 V | | 155 | | 4,75 | | 20 | | |
| 7022.0210 | 12,50 A / 380 V | | 210 | | | | 15 | | |