



Distributor of Abracon Corporation: Excellent Integrated System Limited
Datasheet of ABS13-32.768KHZ-T - Crystal 32.7680kHz 20ppm 12.5pF 65 kOhm -40°C -
85°C Surface Mount 4-SMD, Flat Lead (3 Leads)

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Abracon Corporation](#)
[ABS13-32.768KHZ-T](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

32.768kHz SMD LOW PROFILE CRYSTAL



6.9 x 1.4 x 1.3 mm

ABS13

RoHS/RoHS II compliant.
 Pb in high temperature solder

(exempt 7(a) per RoHS II 2011/65/EU Annex)

Moisture Sensitivity Level: Level 1

FEATURES:

- Low frequency
- Plastic package with embedded heat resistant crystal in cylinder package
- Extended temperature -40°C to +85°C for industrial applications
- Suitable to RoHS compliant reflow

APPLICATIONS:


- Commercial & Industrial applications
- Wireless communications
- PDA and Palm Pilots

STANDARD SPECIFICATIONS:

Parameters	Minimum	Typical	Maximum	Units	Notes
Nominal Frequency	-----	32.768	-----	kHz	
Operating Temperature	-40	-----	+85	°C	
Turnover Temperature	+20	+25	+30	°C	
Storage Temperature	-55	-----	+125	°C	
Frequency Tolerance @+25°C	-20	-----	+20	ppm	See options
Frequency Coefficient (β)	-0.040	-0.034	-0.028	ppm/T ²	
Equivalent series resistance (R1)	-----	-----	65	kΩ	
Load capacitance (CL)	-----	12.5	-----	pF	See options
Drive Level	-----	-----	1	μW	
Aging	-3	-----	+3	ppm	@25°C±3°C First year
Insulation Resistance	500	-----	-----	MΩ	@ 100Vdc ± 15V

OPTIONS AND PART IDENTIFICATION:

(Left blank if standard)

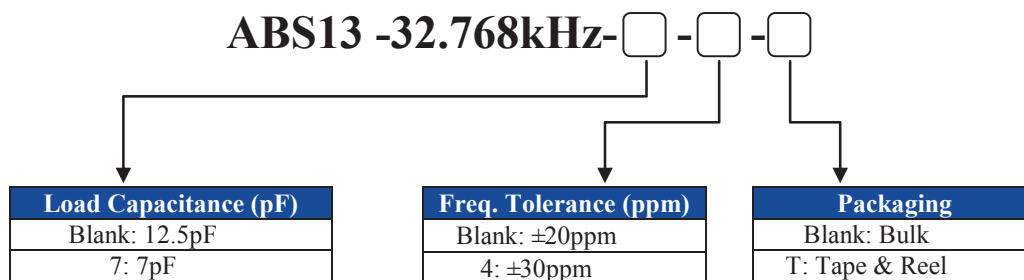

32.768kHz SMD LOW PROFILE CRYSTAL




6.9 x 1.4 x 1.3 mm

ABS13



RoHS/RoHS II compliant.
 Pb in high temperature solder
 (exempt 7(a) per RoHS II 2011/65/EU Annex)

OUTLINE DRAWING:

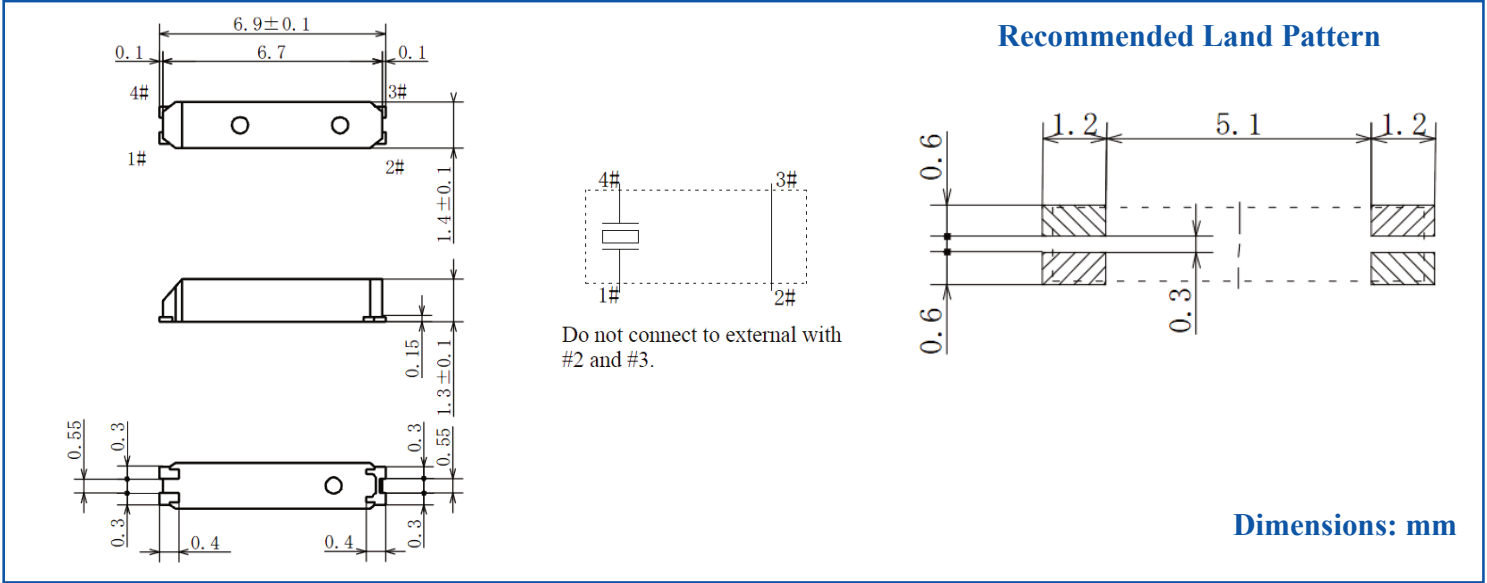

TAPE & REEL: T = Tape and reel 3,000pcs/reel

REFLOW PROFILE

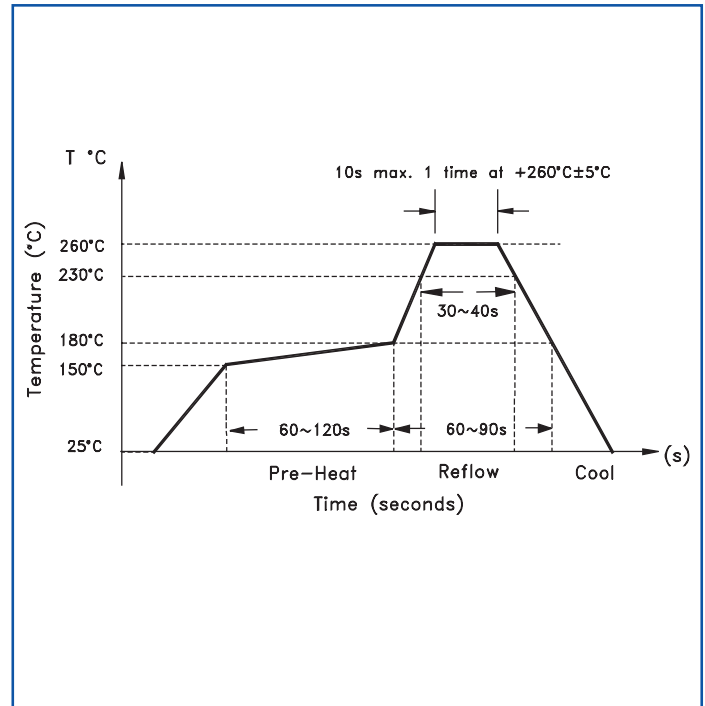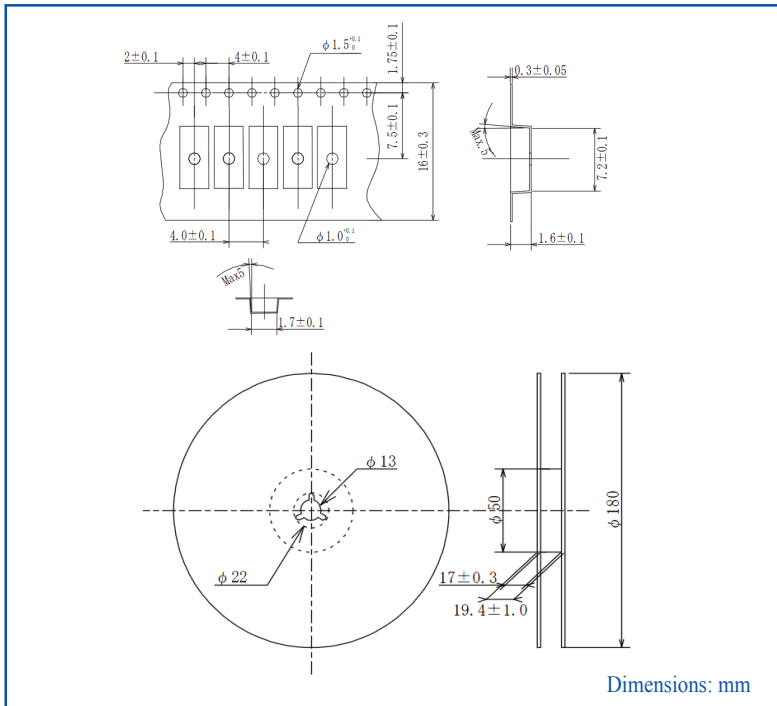

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.