

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Pomona Electronics](#)
[2631](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

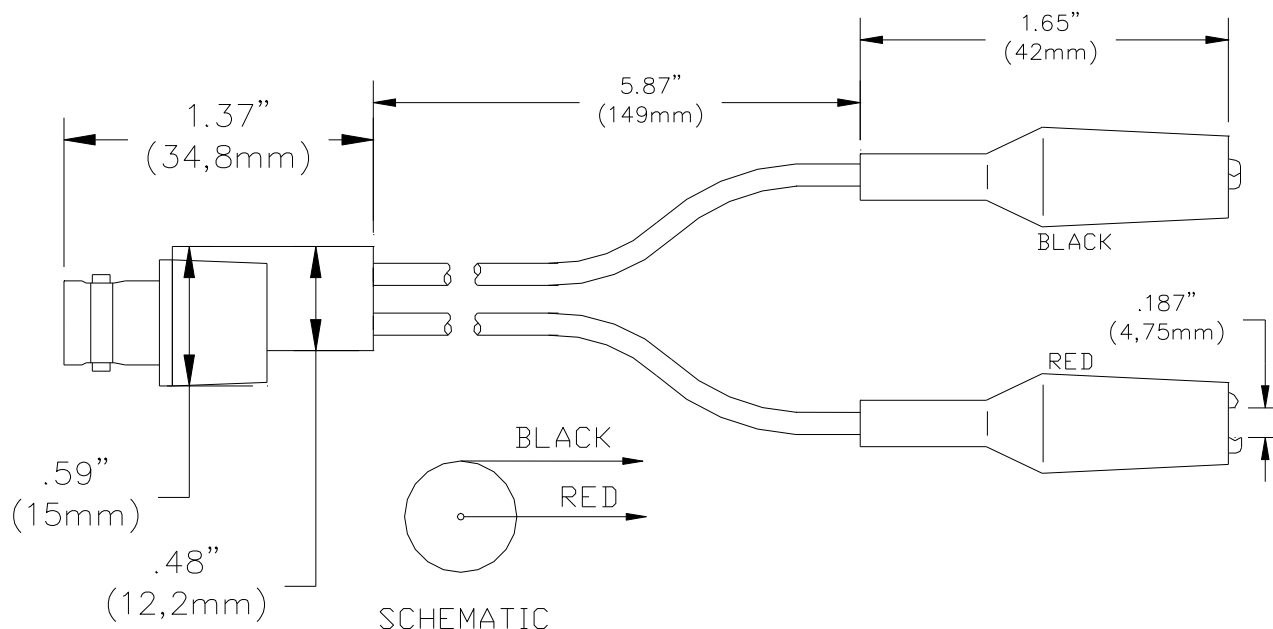

FEATURES:

- ✓ Converts BNC (male) cables / connectors to minigator test clips for test versatility.
- ✓ BNC connector is molded directly to the wire for pull strength durability and dust and moisture resistance.
- ✓ BNC center contact is gold plated Beryllium Copper for corrosion resistance, low contact resistance and long insertion life.
- ✓ Minigator clips attach to terminals up to .187" (4.75mm) diameter.
- ✓ Black wire is connected to BNC shell, red wire to BNC center contact.

MATERIALS:

BNC: Nickel Plated Brass, Center Contact: Gold Plated Beryllium Copper

Dielectric: PTFE

Wire: 20 AWG, PVC Insulated

Minigators: Nickel plated steel, Spring: stainless steel

Boot: Vinyl, color matches color of wire

RATINGS:

Operating Voltage: Hands free testing in controlled voltage environments: 45 VRMS Max.

Operating Temperature: +122°F (+50°C) Max.

ORDERING INFORMATION: Model 2631*

* Custom lengths are available, contact Pomona Product Support at: 1-800-241-2060

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.