

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Wiha](#)
[28522](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Go To
Image Index

Go To
Numerical Index

Wiha Quality Tools
Germany



www.wihatools.com

ESD Safe Adjustable TorqueControl Tools



Includes Certificate

SHOP

285 ESD Safe TorqueVario-S, With Window Scale

EN ISO 6798, BS EN 26789, ASME B107.14M, +/- 6% Accuracy
Ergonomic multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when torque setting has been attained. With Certificate of accuracy.

Item No.	Range	mm	lbs.	pkg.
285 22*	15 - 80(in/oz)	2.5 Inch oz	122 - 127	.33 1
285 24	5 - 10	.2 Inch lbs	122 - 127	.34 1
285 26	7.5 - 20	.5 Inch lbs	126 - 131	.42 1

* +/- 10% (This unit only)

Each TorqueVario handle has unique serial number and certificate of calibration



With Certificate of Calibration

SHOP

285 91 Set 24 Pcs. ESD Safe Adjustable TorqueVario-S Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool, packed in a compact durable storage box.

Item No.	Weight
285 91	1.31 lbs.

Slotted: 1.5, 2.0, 3.0, 4.0mm
Phillips: #00, #0, #1
TORX: T6, T7, T8, T9, T10, T15
Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"
28524 Handle ESD Safe Range 5 - 10 Inch lbs.

285 92 Set 24 Pcs. ESD Safe Adjustable TorqueVario-S Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool, packed in a compact durable storage box.

Item No.	Weight
285 92	1.31 lbs.

Slotted: 1.5, 2.0, 3.0, 4.0mm
Phillips: #00, #0, #1
TORX: T6, T7, T8, T9, T10, T15
Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"
28526 Handle ESD Safe Range 7.5 - 20 Inch lbs.

**See ESD Safe Tools
On Pages 127-139, 163-165**

PREVIOUS



288 ESD Safe Slotted Interchangeable Blades For TorqueVario-S

Slotted tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item No.	mm	Inch	mm	lbs.	Max. Torque Nm	pkg.
288 01	1.5	.059	175	.07	0.15	1
288 03	2.0	.078	175	.07	0.4	1
288 05	3.0	.118	175	.07	0.6	1
288 07	3.5	.139	175	.07	1.1	1
288 09	4.0	.157	175	.07	2.5	1



288 ESD Safe Phillips Interchangeable Blades For TorqueVario-S

Phillips tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.


Item No.	Size	mm	mm	lbs.	Max. Torque Nm	pkg.
288 10	000	175	4.0	.07	0.4	1
288 12	00	175	4.0	.07	0.4	1
288 14	0	175	4.0	.07	0.9	1
288 16	1	175	4.0	.07	3.8	1



288 ESD Safe TORX Interchangeable Blades For TorqueVario-S

TORX tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, hard chromed.

Item No.	Size	mm	mm	lbs.	Max. Torque Nm	pkg.
288 25	T5	175	4.0	.07	0.4	1
288 26	T6	175	4.0	.07	0.6	1
288 27	T7	175	4.0	.07	0.9	1
288 28	T8	175	4.0	.07	1.3	1
288 29	T9	175	4.0	.07	2.5	1
288 30	T10	175	4.0	.07	3.8	1

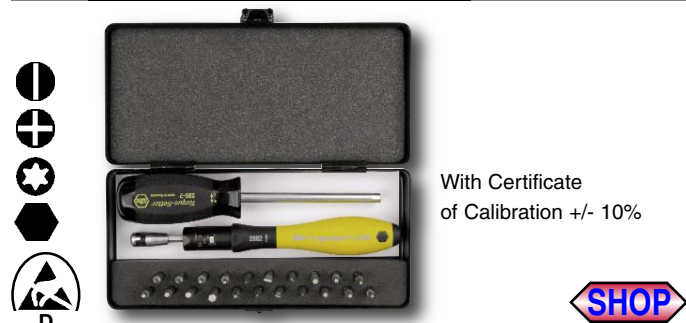

With Certificate of Calibration +/- 10%

SHOP

288 90 Set 24 Piece TorqueVario-S ESD Safe Micro-Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool. Packed in a compact durable storage box.

Item No.	Weight
288 90	1.33 lbs.

Slotted: 1.5, 2.0, 3.0, 4.0mm Phillips: #00, #0, #1
TORX: T6, T7, T8, T9, T10, T15
Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"
28522 ESD Safe Handle Range 15-80 Inch/oz.

NEXT