

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT DATASHEET

EVEREADY

1-800-383-7323 USA/CAN
www.energizer.com


Eveready 1250

D
SUPER HEAVY DUTY



Industry Standard Dimensions

mm (inches)

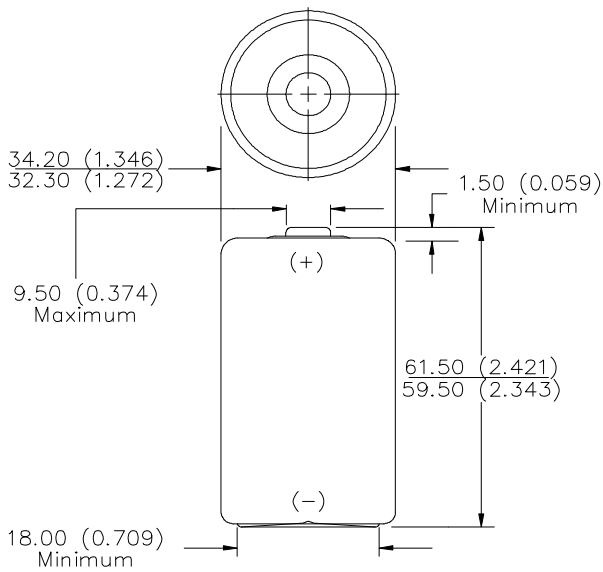

Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)
(No Added Mercury or Cadmium)

Designation: ANSI-13D, IEC-R20

Battery Voltage: 1.5 Volts

Operating Temp: -18°C to 55°C (0°F to 130°F)

Average Weight: 89.0 grams (3.1 oz.)


Volume: 53 cubic centimeters (3.2 cubic inch)

Average Capacity: 8,000 mAh to 0.8 volts
(Rated at 25 mA continuous at 21°C)


Cell: One No. 50 (size "D")

Jacket: Metal


TYPICAL PERCENT SERVICE
3.9 ohm - 4 hours/day to 0.75 volts

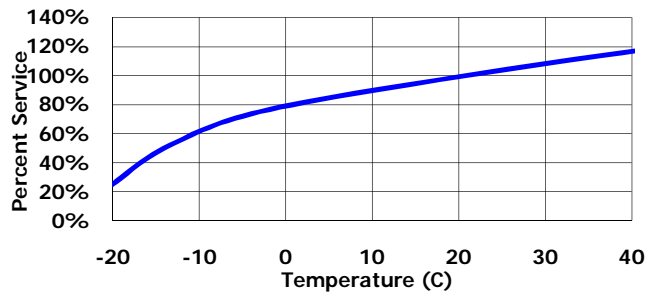

CONSTANT RESISTANCE PERFORMANCE
Typical Service

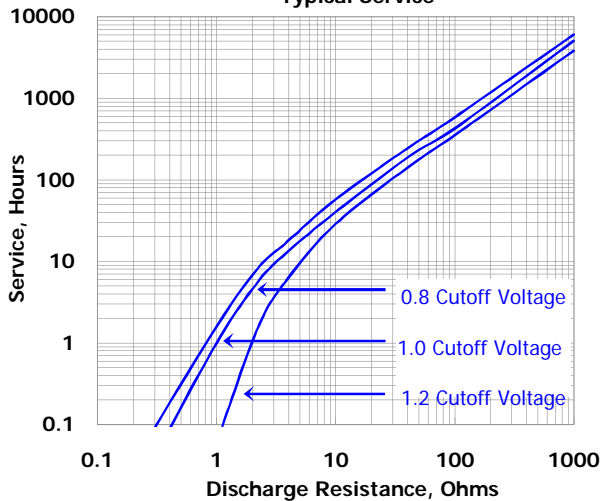

CONSTANT CURRENT DISCHARGE
Typical Service

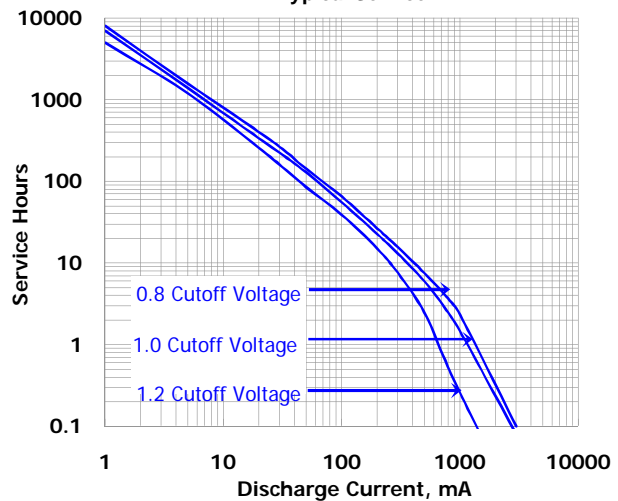

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.


Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved


Eveready 1250

Industry Standard Tests (21° C)


RADIO
10 ohm - 4 hours/day

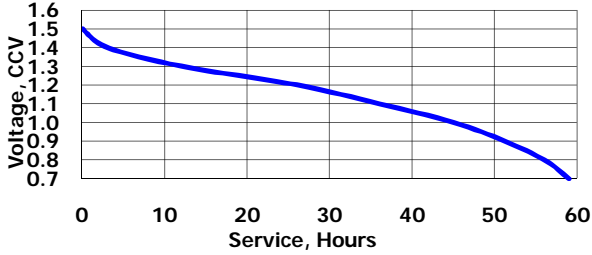


PORTABLE STEREO
3.9 ohm - 1 hr/day

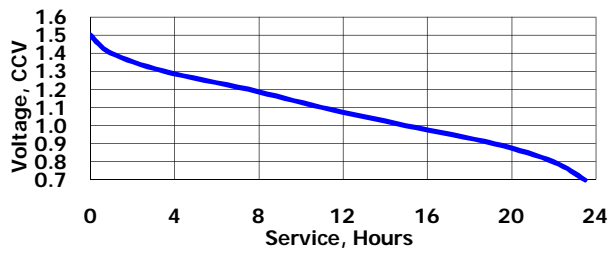

TOY
2.2 ohm - 1 hr/day

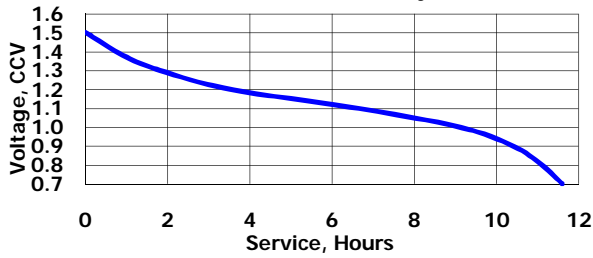

PORTABLE LIGHT
2.2 ohms - 4 min/hour 8 hours/day

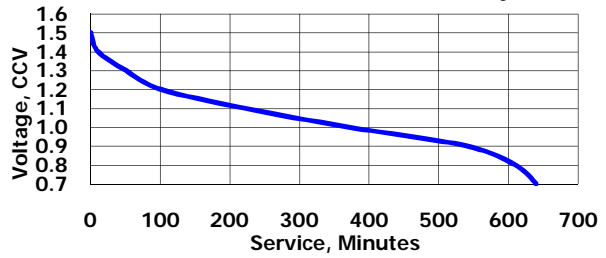

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved