

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[2256-C-24](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Pomona®

**Model 2256
Patch Cord "N" (Male) Both Ends**

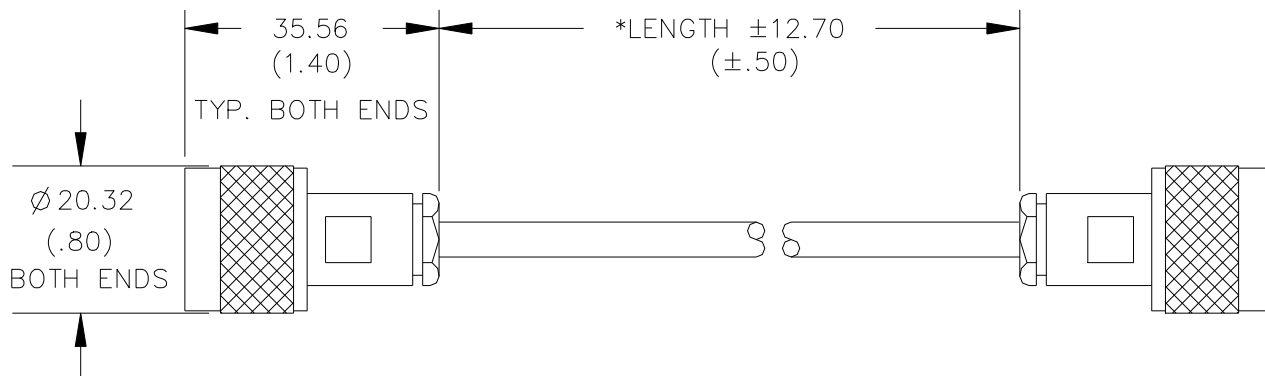

	RG 142B/U (Tinted Brown)
Model	2256-X-XX
Capacitance pf/ft.	29.0
Nominal Impedance	50
Temp	+200°c

MATERIALS:

- Conn: 1st end – Type "N" male, See table above.
Finish: Body and Fitting, Tarnish resistant.
Center contact-Gold plated per requirements of MIL-C-39012.
Nominal Impedance: 50 Ohms.
- Cable: See table above. Marking: "POMONA 2256-X-XX".
- Conn: 2nd end – Same as first end.

RATINGS:

- Operating Temperature: 2256-C-XX: +80°c (+176°f.) Max.
2256-X-XX: +200°c (+440°f.) Max.
- Operating Voltage: 1000 VRMS Max.

ORDERING INFORMATION: Model 2256-X-XX

XX = Cable Lengths, Standard Length: 36" (914), 48" (1219) & 60" (1542).
Additional lengths can be quoted upon request.
Ordering Example: 2256-X-60 Indicates 60" in length

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA