

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)  
[3364-0](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# Pomona®

## Model 3364 Quad Stacking Plug

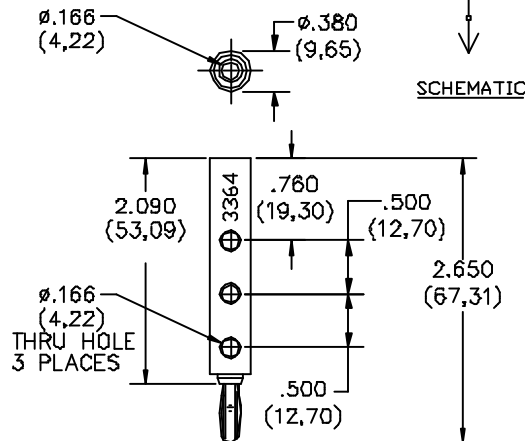

### FEATURES:

- Allows four parallel connectors to the same point.
- 3 cross .166 dia. holes
- 4.2 (.166) dia., provide side stackup connection.

### MATERIALS:

Upper Conn.: Banana Jack

Material: Brass per QQ-B-626. Alloy 360 ½ Hard.

Finish: Nickel plated per QQ-N-290, Class 2, 200 to 300 microinches.

Insulation: ABS molded to Banana Jack and Banana Plug Body.

Color: See Tab Block

Marking: "POMONA ELECTRONICS 3364."

Lower Conn.: Banana Plug

Material: Spring – Beryllium Copper per QQ-C-533, Alloy 170, Cond. H.T.

Body: Same as Upper Conn.

### RATINGS:

Operating Temperature: +50° C (+122° F) Max.

Operating Voltage: 5000 VDC.

Current: 15 Amperes Cont.

Contact Resistance: Less than 1 milliohm.

**ORDERING INFORMATION:** Model 3364-\*

\*= Color, -0 Black, -2 Red

Ordering Example: 3364 -2 Color is Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA